

144/430 MHz, FM MULTI BANDER

# TM-742 A/E

144/430/1200 MHz FM TRIBANDER

# TM-942 A

## SERVICE MANUAL

# KENWOOD

©1992-12 PRINTED IN JAPAN  
B51-8192-00 (S) 1094

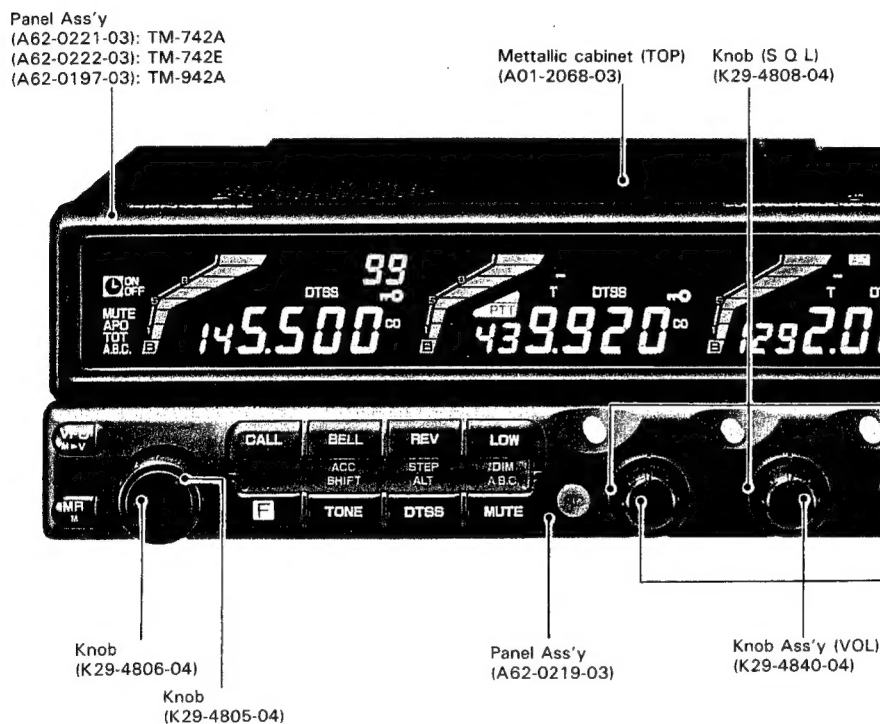


Photo is TM-942A

## CONTENTS

OVER VIEW .....	2	430/440M TX-RX UNIT (X57-359X-XX) .....	149
CIRCUIT DESCRIPTION .....	3	220M TX-RX UNIT (X57-3810-10) .....	153
DESCRIPTION OF COMPONENTS .....	51	144M TX-RX UNIT (X57-3580-XX) .....	157
SEMICONDUCTOR DATA .....	68	50M TX-RX UNIT (X57-3800-01) .....	161
PARTS LIST .....	71	28M TX-RX UNIT (X57-3790-01) .....	165
EXPLODED VIEW .....	116	BLOCK DIAGRAM .....	169
PACKING .....	120	LEVEL DIAGRAM .....	175
ADJUSTMENT .....	122	TSU-7 (CTCSS UNIT) .....	177
PC BOARD VIEWS/SCHEMATIC DIAGRAM		MC-45 (MULTI FUNCTION MICROPHONE) ...	179
CONTROL UNIT (X53-346X-XX) .....	135	MC-45DM (MULTI FUNCTION MICROPHONE	
DISPLAY UNIT (X54-3130-11) .....	137	WITH AUTOPATCH) .....	180
SCHEMATIC DIAGRAM .....	139	UT-28S/50S/UT-220S/1200 SPECIFICATION ...	181
1200M TX-RX UNIT (X57-3600-11) .....	143	SPECIFICATION .....	BACK COVER

# TM-742 A/742 E/942 A

## OVERVIEW

### List of Destinations

Model	Destination	Destination code	Model	Destination	Destination code
TM-742A	North America	K	TM-942A	North America	K
TM-742A	Canada	P	TM-942A	Canada	P
TM-742E	Europe	E	TM-942A	Other countries	M
TM-742E	Europe	E2			
TM-742E	Europe	E3			
TM-742A	Other countries	M			
TM-742A	Other countries	M2			

### Units for Each Model and Destination


Unit Name	Parts. No.	TM-742A/E							TM-942A			Band Units			
		K	P	E	E2	E3	M	M2	K	P	M	UT-28S	UT-50S	UT-220S	UT-1200
Control Unit	X53-3460-11	○	○						○	○					
Control Unit	X53-3460-21						○				○				
Control Unit	X53-3460-22							○							
Control Unit	X53-3462-71			○		○									
Control Unit	X53-3462-72				○										
Display Unit	X54-3130-11	○	○	○	○	○	○	○	○	○	○				
28TX-RX	X57-3790-01											○			
50TX-RX	X57-3800-01												○		
144TX-RX	X57-3580-11								○	○	○				
144TX-RX	X57-3580-12	○	○	○	○	○	○	○							
220TX-RX	X57-3810-10													○	
440TX-RX	X57-3590-12	○	○								○				
430TX-RX	X57-3590-22						○	○							
430TX-RX	X57-3592-72			○	○	○			○	○					
1200TX-RX	X57-3600-11								○	○	○				○

### BAND UNITS

Any of the following optional band units may be installed in the TM-742A/742E.

The same instructions apply for the Tri-Bander as for the Dual-bander.

	OPTIONAL BAND UNIT
TM-742A U.S.A. Version	UT-28S UT-50S UT-220S UT-1200
TM-742A	UT-28S UT-50S UT-1200
TM-742E	UT-28S UT-50S UT-1200

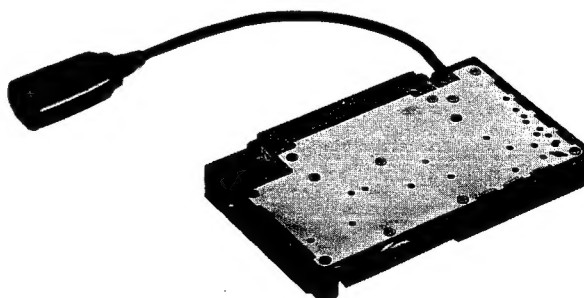

## CIRCUIT DESCRIPTION

### UT-28S

#### 28 TX-RX Unit Frequency Configuration

The 28 MHz unit incorporates a variable frequency oscillator (VFO), based on a phase-locked-loop (PLL) synthesizer system, that allows a channel step of 5, 10, 15, 20, or 25 kHz to be selected. The frequency in the receive signal channel is mixed with a first local oscillation frequency of 36.83-38.525 MHz to produce a first intermediate frequency (IF) of 8.83 MHz.

This frequency is then mixed with a second local oscillation frequency of 9.285 MHz to produce a second IF of 455 kHz. This is called a double-conversion system. The signal in the transmission channel is produced by direct oscillation, is frequency-divided by a PLL circuit, amplified by a linear amplifier, then transmitted.

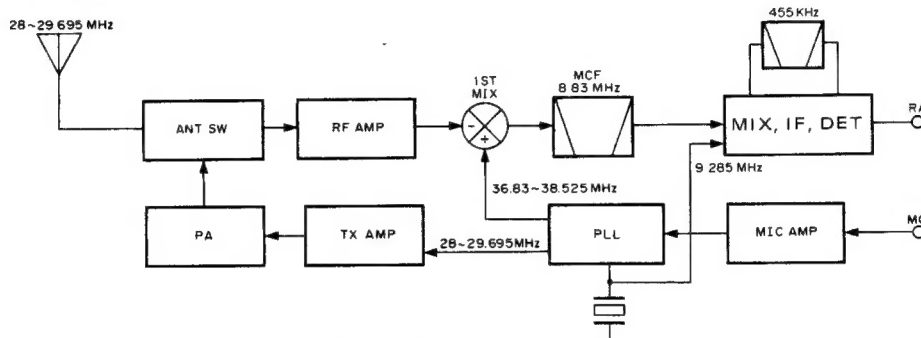


Fig. 1 Frequency configuration

#### 28 TX-RX Unit Receive Signal Channel

##### ● Outline

The received signal from the antenna passes through a low-pass filter in the final transmission stage and then through a transmission/reception selection diode switch to the receiving front end. The signal then passes through an antenna matching coil and is amplified to high frequencies by a MOS field-effect transistor. The unwanted components of the signal are eliminated by a bandpass filter consisting of a three-stage variable capacitor. The resulting signal goes to the first mixer, is mixed with the first local signal from the PLL circuit, then converted to the first IF of 8.83 MHz. The unwanted near-by signal components are then eliminated by a two-

stage MCF.

The first IF signal is amplified and input to FM IF HIC IC6 (KCD04). This signal is then mixed with the second local oscillation frequency of 9.285 MHz to produce the second IF signal of 455 kHz. The unwanted near-by signal components are then eliminated by an FM ceramic filter. The resulting signal is input to IC6 again, amplified to the second IF signal, and detected to produce an audio signal.

##### ● Signal-strength meter

The signal-strength meter output voltage of FM IF HIC IC6 (KCD04) is supplied to the control unit.

Item	Rating
Center frequency (fo)	8830 kHz
Pass bandwidth	± 6 kHz or more at 3 dB
Attenuation bandwidth	± 20 kHz or less at 40 dB ± 40 kHz or less at 60 dB
Guaranteed attenuation	70 dB or more within Fo ± 1 MHz (Spurious: 40 dB or more)
Ripple	1 dB or less
Insertion loss	2 dB or less
Terminating impedance	4.7 kΩ/0pF

Table 1 MCF (L71-0422-05) (28TX-RX unit XF1)

Item	Rating
Nominal center frequency	455KHz
6 dB bandwidth	± 6 kHz or more (from 455 kHz)
50 dB bandwidth	± 12.5 kHz or less (from 455kHz)
Ripple (within ± 5 kHz of 455 kHz)	3 dB or less
Insertion loss (at maximum output point)	6 dB or less
Guaranteed attenuation (within ± 100 kHz of 455 kHz)	35 dB or more
I/O matching impedance	2.0kΩ

Table 2 Ceramic filter CFWM455F (L72-03/2-05) (28TX-RX unit CF1)

# TM-742 A/742 E/942 A

## CIRCUIT DESCRIPTION

### ● Shift-register circuit

The ES, CK, and DT serial data from the control unit

are sent to C1 (BU4094BF) to perform the control operation outlined in the following table:

Pin No.	Name	Function	Pin No.	Name	Function
1	Strobe	Enable input	9	Qs	
2	Data	Serial data input	10	Q's	
3	Clock	Clock input	11	Q8	TX/RX selection. High when TX is set.
4	Q1	TX/RX selection. Low when TX is set	12	Q7	ATT switching: High when ATT is on
5	Q2	TX power selection. Low when middle and low. "H" when high.	13	Q6	High for AM; low for FM; High for narrow; low for wide
6	Q3	TX power selection. Low when high and low. "H" when middle.	14	Q5	High when off band
7	Q4	Low when off band	15	OE	8V
8	Vss	GND	16	VDD	8V

Table 3

### ● ATT circuit

If there is cross modulation, the ATT circuit operates

to attenuate the received signal before it enters Q2 (FET for high-frequency amplification).

## 28 TX-RX Unit Transmit Signal Channel

### ● Outline

In the transmission channel, the desired frequency is produced by direct oscillation, and is directly frequency modulated by means of a varicap diode.

### ● Modulator circuit

The audio signal from the control unit is input to microphone amplifier HIC IC3 (KCA04). IC4 consists of a preemphasis circuit, amplifier, limiter, and splatter circuit that eliminates unwanted high-frequency components. The voltage-controlled oscillator (VFO) signal is directly frequency modulated by means of a varicap diode in the frequency modulator circuit.

### ● Younger-stage circuit

The signal output from the VCO is input to drive circuit HIC IC16 (KCB16). The amplifier can obtain a stable drive output without adjustment because it has a large bandwidth. An APC circuit controls the collector voltage in the Younger final stage.

### ● Power amplifier circuit

The drive signal is amplified to the specified level by a discrete transistor. Q2 performs class B amplification, and the collector output voltage is controlled by an APC circuit. Q202 amplifies the power by class C operation, improving the efficiency of the final stage.

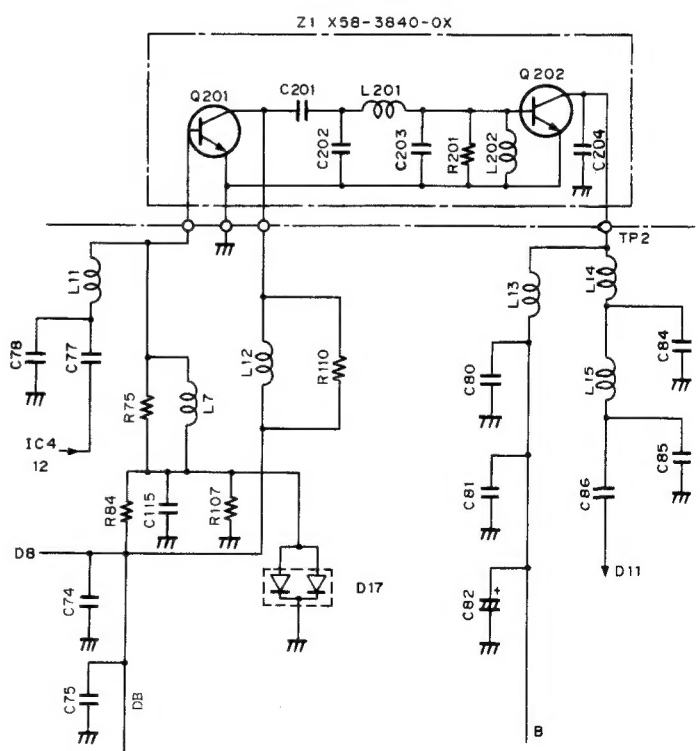


Fig. 2 Power amplifier circuit



## CIRCUIT DESCRIPTION

### ● APC circuit

The automatic transmission output control circuit (APC) detects and partially amplifies the power amplifier output with a diode, and controls the output control voltage. The control voltage is output in inverse proportion to the output, so the control voltage output is always constant. To protect the radio against excessive temperature rise, the high-power unit has a thermal switch. The high-power unit is automatically set to a low power by the thermal switch if it exceeds the specified temperature.

### ● 8T (8 V during transmission) and unlock signal

The signal output from pin 4 of IC1 is high during reception, Q13 is turned on, and Q14 and Q11 are turned off. No voltage appears at the collector (8T) of Q11. Serial data is output from the control unit during transmission and input to shift register IC1. Pin 4 of IC1 is then made low. Therefore, Q13 is turned off, and Q14 and Q11 are turned on. An 8 V voltage is applied to the collector (8T) of Q11.

If the PLL circuit is unlocked during transmission, the LD pin goes low, Q24 is turned off, Q13 is turned on, Q14 is turned off, Q11 for 8T switching control is turned off, and the 8T line does not operate.

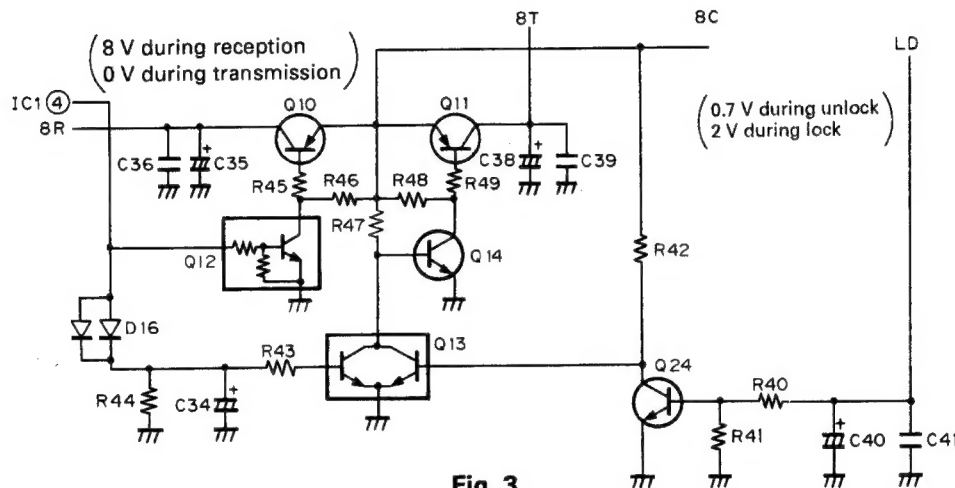


Fig. 3

### 28 TX-RX Unit PLL Synthesizer

The VCO and PLL circuits are housed in a solid shielding case as a hybrid integrated circuit. Comparison frequencies are produced by dividing a 9.285 MHz reference oscillation frequency by 1857 to correspond to the 5, 10, 15, 20, and 25 kHz channel steps.

For 28 MHz, the relationship between  $f_{VCO}$  (RX) and each frequency division ratio is given by

$$f_{VCO} = (28 + 8.83) = \{(n \times 64) + A\} \times f_{OSC} / R$$

Where:  $f_{VCO}$  = VCO output frequency

n: Binary 10-bit programmable counter setting value

A: Binary 6-bit programmable counter setting value

$f_{OSC}$ : Reference oscillation frequency of 9.285 MHz

R: Binary 16-bit programmable counter setting value 1857

In this case, n is 155, and A is 6.

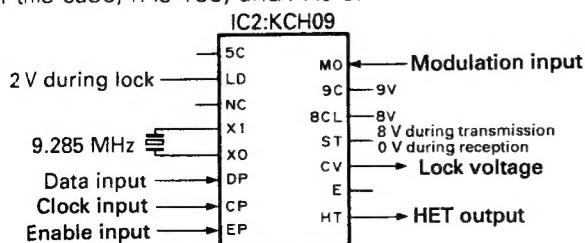


Fig. 4

$$\begin{aligned} \text{Therefore, } f_{VCO} &= \{(115 \times 64) + 6\} \times 9285 / 1857 \\ &= (7360 + 6) \times 5 \\ &= 36.83 \text{ MHz} \end{aligned}$$

The following table lists the pin functions of the PLL circuit:

Pin name	Function	Pin name	Function
5C	5V	MO	Modulation signal input
LD	Lock signal (2 V during locking)	9C	9V
NC	Unused	8CL	8 V (ripple filter)
XI XO	9.285 MHz crystal oscillation	ST	8 V during transmission; 0 V during reception
		CV	Lock voltage output
DP	Data input	E	GND
CP	Clock input	HT	HET output
EP	Enable input		

Table 4 PLL circuit pin functions

# TM-742 A/742 E/942 A

## CIRCUIT DESCRIPTION

### UT-50S

#### 50 TX-RX Unit Frequency Configuration

The 50 MHz unit incorporates a variable frequency oscillator (VFO), based on a phase-locked-loop (PLL) synthesizer system, that allows a channel step of 5, 10, 15, 20, or 25 kHz to be selected. The frequency in the receive signal channel is mixed with a first local oscillation frequency of 60.595-64.590 MHz to produce a first in-

termediate frequency (IF) of 10.595 MHz. This frequency is then mixed with a second local oscillation frequency of 11.05 MHz to produce a second IF of 455 kHz. This is called a double-conversion system. The signal in the transmission channel is produced by direct oscillation, and is frequency-divided by a PLL circuit, amplified by a linear amplifier, then transmitted.

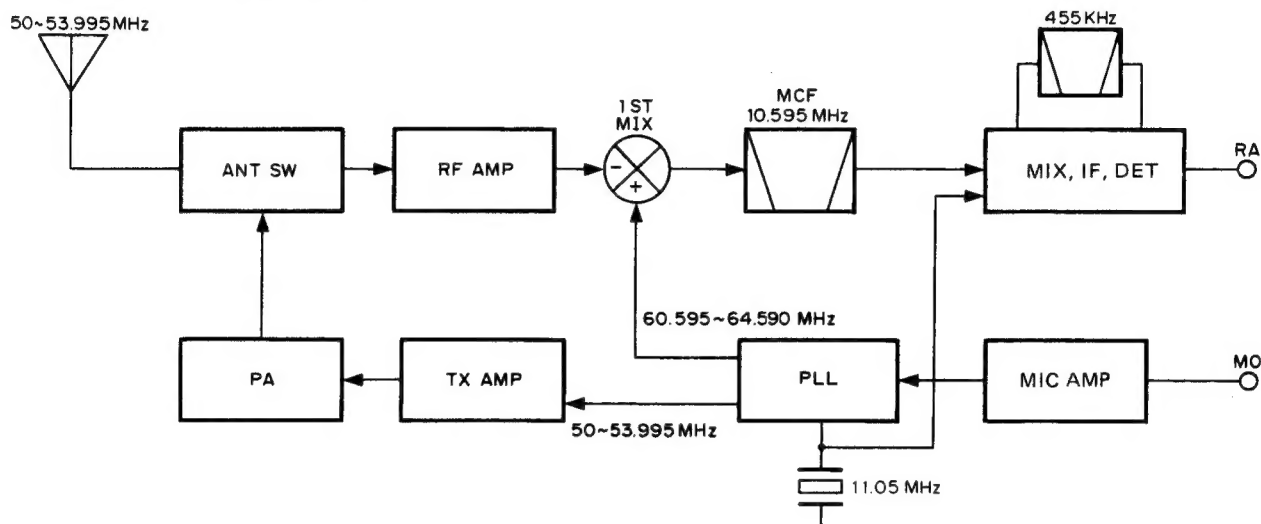


Fig. 5 Frequency Configuration

#### 50 TX-RX Unit Receive Signal Channel

##### ● Outline

The received signal by the antenna passes through a low-pass filter in the final transmission stage and then through a transmission/reception selection diode switch to the receiving front end. The signal then passes through an antenna matching coil and is amplified to high frequencies by a GaAs (gallium arsenide) field-effect transistor. The unwanted components of the signal are eliminated by a bandpass filter consisting of a three-stage variable capacitor. The resulting signal goes to the first mixer, is mixed with the first local signal from the PLL circuit, then converted to the first IF of 10.595 MHz.

Item	Rating
Center frequency	10.595 MHz
Pass bandwidth	±6.5 kHz or more at 3 dB
Attenuation bandwidth	±23 kHz or less at 40 dB ±40 kHz or less at 60 dB
Guaranteed attenuation	70 dB or more within $F_o \pm 1$ MHz (Spurious: 40 dB or more)
Ripple	1 dB or less
Insertion loss	1.5 dB or less
Terminating impedance	2.9 k $\Omega$ /OpF

Table 5 MCF (L71-0421-05) (50TX-RX unit XF1)

The unwanted near-by signal components are then eliminated by a two-stage MCF.

The first IF signal is amplified and input to FM IF HIC IC6 (KCD04). This signal is then mixed with the second local oscillation frequency of 11.05 MHz to produce the second IF signal of 455 kHz. The unwanted near-by signal components are then eliminated by an FM ceramic filter. The resulting signal is input to IC6 again, amplified to the second IF signal, and detected to produce an audio signal.

Item	Rating
Nominal center frequency	455KHz
6 dB bandwidth	±6.0 kHz or more (from 455 kHz)
50 dB bandwidth	±12.5 kHz or less (from 455 kHz)
Ripple (within ±5 kHz of 3455 kHz)	3 dB or less
Insertion loss (at maximum output point)	6 dB or less
Guaranteed attenuation (within ±100 kHz of 455 kHz)	35 dB or more
Terminating impedance	2.0 k $\Omega$

Table 6 Ceramic filter CFWM455F (L72-0372-05) (50TX-RX unit CF1)

## CIRCUIT DESCRIPTION

### ● Signal-strength meter

The signal-strength meter output voltage of FM IF HIC IC6 (KCD04) is supplied to the control unit.

### ● Shift-register circuit

The ES, CK, and DT serial data from the control unit are sent to IC1 (BU4094BF) to perform the control operation outlined in the following table:

Pin No.	Name	Function	Pin No.	Name	Function
1	Strobe	Enable input	9	Qs	
2	Data	Serial data input	10	Q's	
3	Clock	Clock input	11	Q8	TX/RX selection. High when TX is set.
4	Q1	TX/RX selection. Low when TX is set	12	Q7	ATT switching: High when ATT is on
5	Q2	TX power selection. Low when middle and low. "H" when high.	13	Q6	High for AM; low for FM
6	Q3	TX power selection. Low when high and low. "H" when middle.	14	Q5	High when off band
7	Q4	Low when off band	15	OE	8V
8	Vss	GND	16	VDD	8V

Table 7

### ● ATT circuit

If there is cross modulation, the ATT circuit operates

to attenuate the received signal before it enters Q2 (FET for high-frequency amplification).

## 50 TX-RX Unit Transmit Signal Channel

### ● Outline

In the transmission channel, the desired frequency is produced by direct oscillation, and is directly frequency modulated by means of a varicap diode.

### ● Modulator circuit

The audio signal from the control unit is input to microphone amplifier HIC IC3 (KCA04). IC4 consists of a preemphasis circuit, amplifier, limiter, and splatter circuit that eliminates unwanted high-frequency components. The voltage-controlled oscillator (VFO) signal is directly frequency modulated by means of a varicap diode in the frequency modulator circuit.

### ● Younger-stage circuit

The signal output from the VCO is input to drive circuit HIC IC4 (KCB18). The amplifier can obtain a stable drive output without adjustment because it has a large bandwidth. An APC circuit controls the collector voltage in the Younger final stage.

### ● Power amplifier circuit

The drive signal is amplified to the specified level by a discrete transistor. Q201 performs class B amplification, and the collector output voltage is controlled by an APC circuit. Q202 amplifies the power by class C operation, improving the efficiency of the final stage.

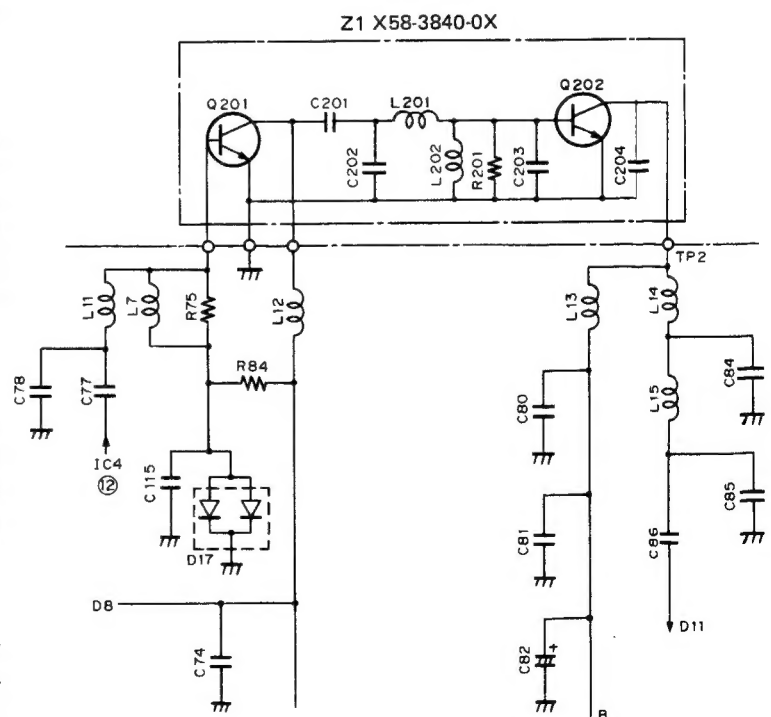


Fig. 6 Power amplifier circuit

# TM-742 A/742 E/942 A

## CIRCUIT DESCRIPTION

### ● APC circuit

The automatic transmission output control circuit (APC) detects and partially amplifies the power amplifier output with a diode, and controls the output control voltage. The control voltage is output in inverse proportion to the output, so the control voltage output is always constant. To protect the radio against excessive temperature rise, the high-power unit has a thermal switch. The high-power unit is automatically set to a low

power by the thermal switch if it exceeds the specified temperature.

### ● LPF circuit

The low-pass filter sets the pole to the second and third harmonics, and cuts the frequency, by having the polar Chebyshev characteristics. To cut high frequencies, a filter with Chebyshev characteristics is used before the antenna.

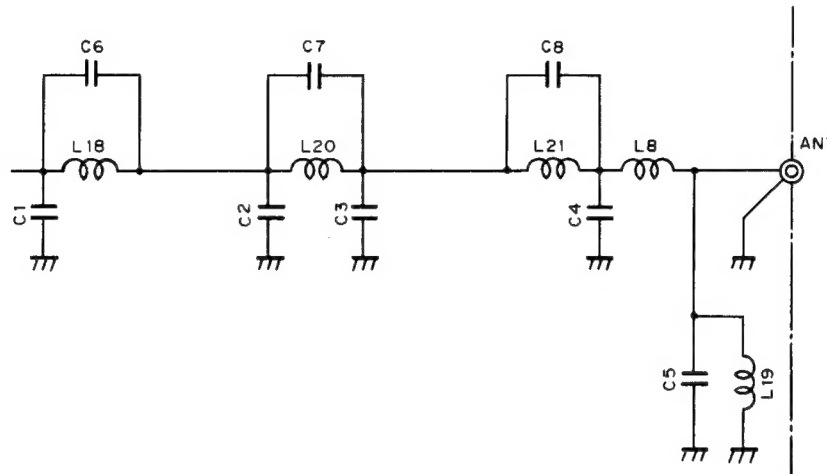


Fig. 7 LPF Circuit

### ● 8T (8 V during transmission) and unlock signal

The signal output from pin 4 of IC1 is high during reception, Q13 is turned on, and Q14 and Q11 are turned off. No voltage appears at the collector (8T) of Q11. Serial data is output from the control unit during transmission and input to shift register IC1. Pin 4 of IC1 is then made low. Therefore, Q13 is turned off, Q14 and

Q11 are turned on. An 8 V voltage is applied to the collector (8T) of Q11.

If the PLL circuit is unlocked during transmission, the LD pin goes low, Q24 is turned off, Q13 is turned on, Q14 is turned off, Q11 for 8T switching control is turned off, and the 8T line does not operate.

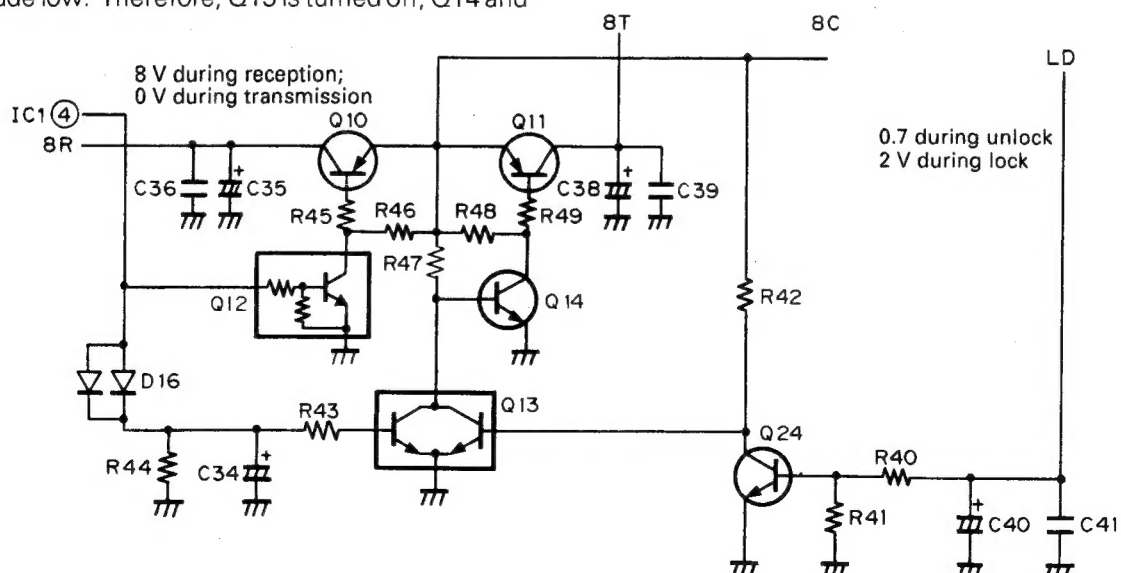


Fig. 8

## CIRCUIT DESCRIPTION

### ● 50 TX-RX Unit PLL Synthesizer

The VCO and PLL circuits are housed in a solid shielding case as a hybrid integrated circuit. Comparison frequencies are produced by dividing a 11.05 MHz reference oscillation frequency by 2210 to correspond to the 5, 10, 15, 20, and 25 kHz channel steps.

For 50 MHz, the relationship between  $f_{VCO}$  (RX) and each frequency division ratio is given by

$$f_{VCO} = (50 + 10.595) = \{(n \times 64) + A\} \times f_{OSC} / R$$

Where:  $f_{VCO}$  = VCO output frequency

n: Binary 10-bit programmable counter setting value

A: Binary 6-bit programmable counter setting value

$f_{OSC}$ : Reference oscillation frequency of 11.05 MHz

R: Binary 16-bit programmable counter setting value

In this case, n is 189, and A is 23.

Therefore,  $f_{VCO} = \{(189 \times 64) + 23\} \times 11050 / 2210$

$$= (12096 + 23) \times 5$$

$$= 60.595 \text{ MHz}$$

The following table lists the pin functions of the PLL circuit:

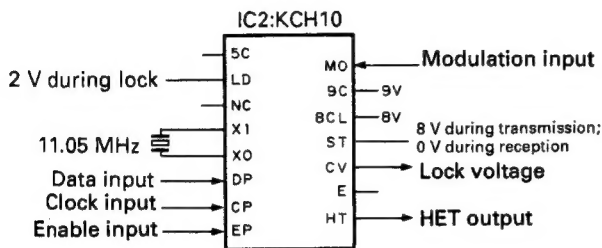


Fig. 9

Pin name	Function	Pin name	Function
5C	5V	MO	Modulation signal input
LD	Lock signal (2 V during locking)	9C	9V
NC	Unused	8CL	8 V (ripple filter)
XI XO	11.05 MHz crystal oscillation	ST	8 V during transmission; 0 V during reception
	Data input	CV	Lock voltage output
DP	Clock input	E	GND
CP	Enable input	HT	HET output
EP			

Table 8 PLL circuit pin functions

# TM-742 A/742 E/942 A

## CIRCUIT DESCRIPTION

### 144 TX-RX Unit Frequency Configuration

The 144 MHz unit incorporates a digital variable-frequency oscillator (VFO) that can freely select a channel step of 5, 10, 12.5, 15, 20, or 25 kHz with a Phase-Locked-Loop (PLL) synthesizer system.

The frequency in the receive signal channel is mixed with a first local oscillation frequency of 133.300-137.295 MHz to produce a first intermediate frequency of 10.7

MHz. This frequency is then mixed with a second local oscillation frequency of 10.245 MHz to produce a second intermediate frequency of 455 kHz. This is called a double-conversion system.

The signal in the transmission channel is directly oscillated and frequency-divided by a PLL circuit, amplified by a straight amplifier, then transmitted.

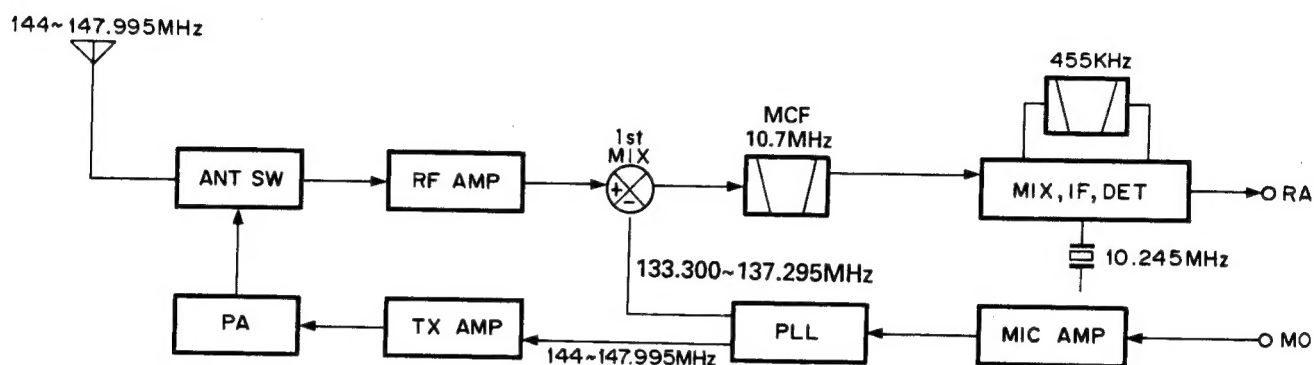


Fig. 10 Frequency configuration

### 144 TX-RX Unit Receive Signal Channel

#### • Outline

For the 144 MHz unit, the received signal from an antenna is passed through a low-pass filter in the final transmission stage and sent through a transmission/reception selection diode switch to the receiving front end. The signal is then passed through an antenna matching coil and amplified to high frequencies by a

GaAs (gallium arsenide) field-effect transistor. The unwanted components of the signal are eliminated by a bandpass filter consisting of a three-stage variable capacitor. The resultant signal is sent to the first mixer, mixed with the first local signal from a PLL circuit, then converted to a first intermediate frequency of 10.7 MHz. The unwanted near-by signal components are then eliminated by a two-stage MCF.

Item	Rating
Nominal center frequency (fo)	10.7MHz
Pass band width	±7.5kHz or less at 3dB
Attenuation band width	±25kHz or less at 40dB ±45kHz or less at 60dB
Ripple	1.0dB or less
Insertion loss	1.5dB or less
Guaranteed attenuation	70dB or more within ±1MHz (Spurious : 40dB or more at fo - fo + 500kHz) 80dB or more at fo - (900 - 920kHz)
Terminating impedance	3kΩ/0pF

Table 9 MCF (L71-0228-05) (144 TX-RX unit XF1)

Item	Rating
Nominal center frequency	455kHz ± 1kHz
6dB bandwidth	±6kHz or more (from 455kHz)
50dB bandwidth	±12.5kHz or less (from 455kHz)
Ripple (within ±4kHz of 455kHz)	3dB or less
Insertion loss	6dB or less
Guaranteed attenuation (within ±100kHz of 455kHz)	35dB or more
I/O matching impedance	2.0kΩ

Table 10 Ceramic filter CFWM455F (L72-037 2-05)  
(144 TX-RX unit CF1)

## CIRCUIT DESCRIPTION

The first intermediate-frequency signal is amplified and input to FM IF HIC IC5 (KCD04). This signal is then mixed with a second local oscillation frequency of 10.245MHz to produce a second intermediate-frequency signal of 455 kHz. The unwanted near-by signal components are then eliminated by an FM ceramic filter. The resultant signal is input to IC5 again, amplified to a second intermediate-frequency signal, and detected to produce an audio signal.

### • Signal-strength meter

The signal-strength meter output voltage of FM IF HIC IC5 (KCD04) is supplied to the control unit.

### • Shift-register circuit

The ES, CK, and DT serial data from the control unit are sent to IC1 (BU4094BF) to perform the control operation outlined in the following table:

Pin NO.	Name	Function	Pin No.	Name	Function
1	Strobe	Enable input	9	Q <sub>5</sub>	
2	Data	Serial data input	10	Q' <sub>5</sub>	
3	Clock	Clock input	11	Q <sub>8</sub>	TX/RX selection. "H" when TX is set.
4	Q1	TX/RX selection. "L" when TX is set	12	Q <sub>7</sub>	439/144 MHz selection. "H" when 144MHz is set.
5	Q2	TX power selection. "L" when middle and low. "H" when high.	13	Q <sub>6</sub>	
6	Q3	TX power selection. "L" when high and low. "H" when middle.	14	Q <sub>5</sub>	
7	Q4		15	OE	8V
8	V <sub>ss</sub>	GND	16	V <sub>DD</sub>	8V

Table 11

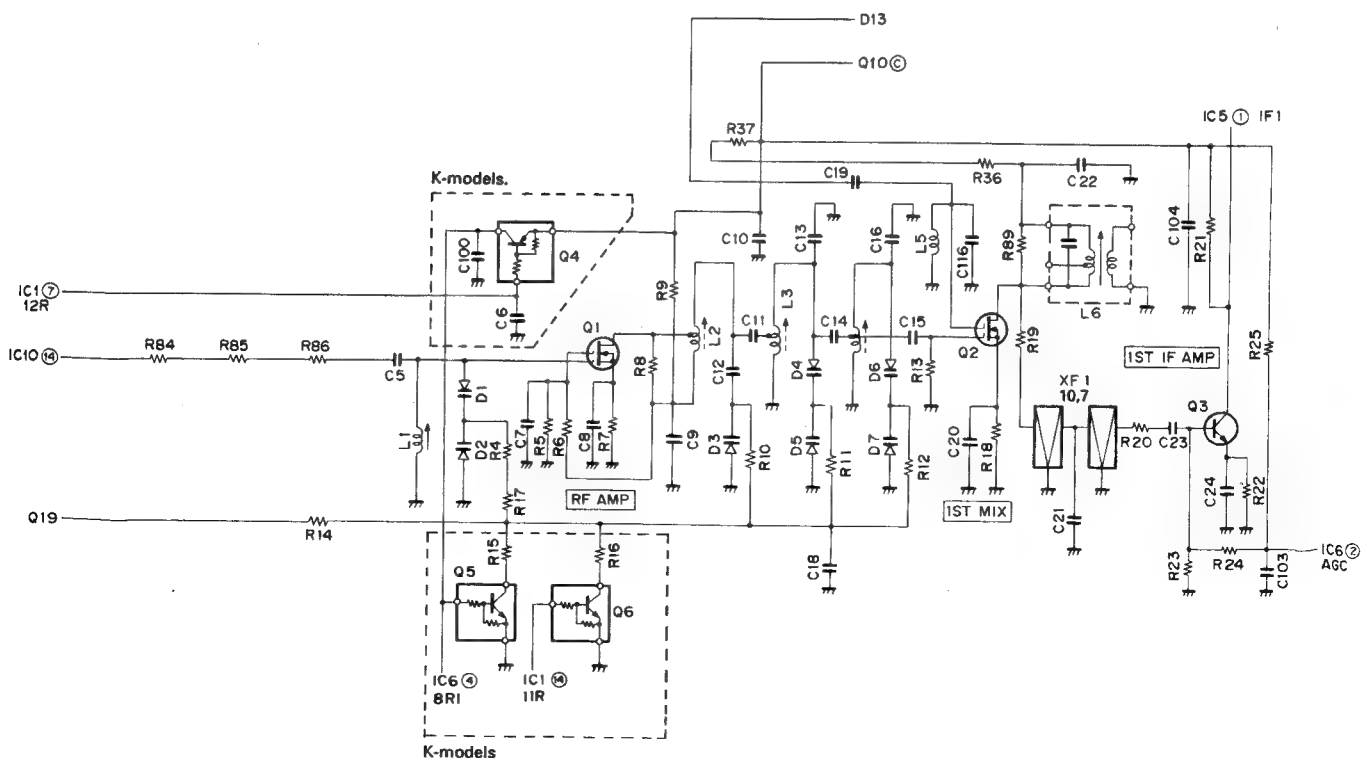


Fig. 11



# TM-742 A/742 E/942 A

## CIRCUIT DESCRIPTION

### 144 TX-RX Unit Transmit Signal Channel

#### ● Outline

In the transmission channel, the desired frequency is directly oscillated and directly frequency modulated by means of a varicap diode.

#### ● Modulator circuit

The audio signal from the control unit is input to microphone amplifier HIC IC7 (KCA04). IC4 consists of a preemphasis circuit, amplifier, limiter, and splatter circuit that eliminate unwanted high-frequency components. The voltage-controlled oscillator (VCO) signal is directly frequency modulated by means of a varicap diode in the frequency modulator circuit.

#### ● Younger-stage circuit

The signal output from the VCO is input to drive circuit HIC IC8 (KCB11). The amplifier can obtain a stable drive output without adjustment because it has a wide band. An APC circuit controls the collector voltage in the younger final stage.

#### ● Power amplifier circuit

A drive signal is input to power module IC10 and amplified to the specified level.

#### ● APC circuit

The automatic transmission output control circuit (APC) detects and partially amplifies the power module output with a diode and controls the output control voltage. The control voltage is output in inverse proportion to the output, so the control voltage output is always constant. To protect the set against excessive temperature rise, the high-power unit has a thermal switch. The high-power unit is automatically set to a low power by the thermal switch when it exceeds the specified temperature.

### 144 TX-RX Unit PLL Synthesizer

The VCO and PLL circuit are housed in a solid shielding case as a hybrid integrated circuit. Comparison frequencies of 6.25 kHz and 5 kHz are produced by dividing a 12.8 MHz reference oscillation frequency by 2048 and 2560 to correspond to 5, 10, 12.5, 15, 20, and 25 kHz channel steps.

For 144 MHz, the relationship between  $f_{VCO}$  (Rx)

and each frequency division ratio is given by

$$f_{VCO} = (144 - 10.7) = \{(n \times 128) + A\} \times f_{osc} + R$$

Where:  $f_{VCO}$  = VCO output frequency

n : Binary 10-bit programmable counter setting value

A : Binary 7-bit programmable counter setting value

$f_{osc}$  : Reference oscillation frequency of 12.8 MHz

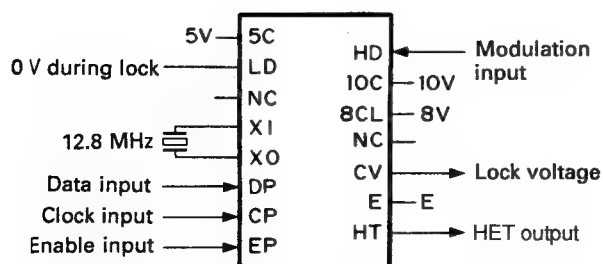


Fig. 12 IC11 KCH05

R: Binary 14-bit programmable counter setting value 2048

In this case, n is 208, and A is 36.

$$\begin{aligned} \text{Therefore, } f_{VCO} &= \{(208 \times 128) + 36\} \times 12800 / 2560 \\ &= \{26624 + 37\} \times 5 \\ &= 133300 \text{ kHz} = 133.300 \text{ MHz} \end{aligned}$$

The following table lists the pin functions of the PLL circuit:

Pin name	Function	Pin name	Function
5C	5V	MO	Modulation signal input
LD	Lock signal (on during lock)	10C	10V
NC	Unused	8CL	8V (ripple filter)
XI	12.8 MHz crystal oscillation	NC	Unused
XO		CV	Lock voltage output
DP	Data input	E	GND
CP	Clock input	HT	HET output
EP	Enable input		

Table 12

## CIRCUIT DESCRIPTION

### • 8T (8 V during transmission) and unlock signal

A 0.7 V voltage is applied to the base of Q13 during reception, Q13 is set on, Q14 is set off, and Q11 is set off. No voltage appears at the collector (8T) of Q11. Serial data is output from the control unit during transmission and input to shift register IC1. Pin 4 of IC1 is then set low. Therefore, Q13 is changed from on to off, Q14 from off to on, and Q11 from off to on. An 8 V

voltage is applied to the collector (8T) of Q11.

An unlock circuit is activated only during transmission. The LD signal output from the PLL circuit is ORed with the signal at pin 4 of IC1 using D11 as shown in the figure, so the LD signal is set high during unlock. Therefore, no voltage appears at the collector (8T) of Q11 and no transmission wave is output to the reception state.

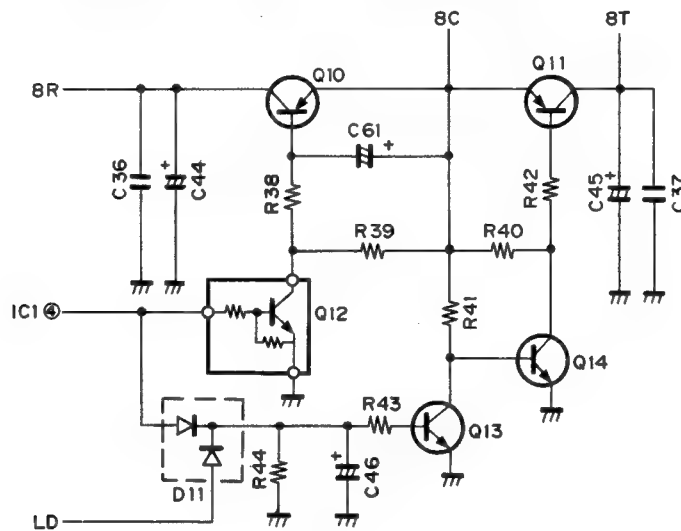


Fig. 13

## UT-220S

### 220 TX-RX Unit Frequency Configuration

The 220 MHz unit incorporates a variable frequency oscillator (VFO), based on a phase-locked-loop (PLL) synthesizer system, that allows a channel step of 5, 10, 12.5, 15, 20, or 25 kHz to be selected. The frequency in the receive signal channel is mixed with a first local oscillation frequency of 189.175-194.17 MHz to produce

a first intermediate frequency (IF) of 30.825 MHz. This frequency is then mixed with a second local oscillation frequency of 30.37 MHz to produce a second IF of 455 kHz. This is called a double-conversion system. The signal in the transmission channel is produced by direct oscillation, and is frequency-divided by a PLL circuit, amplified by a linear amplifier, then transmitted.

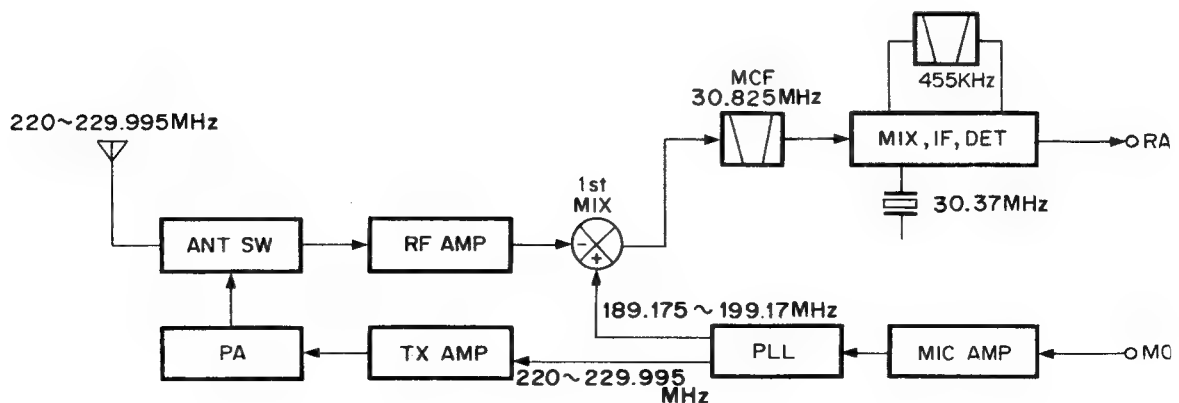


Fig. 14 Frequency configuration

# TM-742 A/742 E/942 A

## CIRCUIT DESCRIPTION

### 220 TX-RX Unit Receive Signal Channel

#### ● Outline

The received signal from the antenna passes through a low-pass filter in the final transmission stage and then through a transmission/reception selection diode switch to the receiving front end. The signal then passes through an antenna matching coil and is amplified to high frequencies by a GaAs (gallium arsenide) field-effect transistor. The unwanted components of the signal are eliminated by a bandpass filter consisting of a three-stage variable capacitor. The resulting signal goes to the first mixer (GaAs field-effect transistor), is mixed with the first local signal from the PLL circuit, then converted to a first IF of 30.825 MHz. The unwanted near-by signal components are then eliminated by a two-stage MCF.

The first IF signal is amplified and input to FM IF HIC IC5 (KCD04). This signal is then mixed with the second local oscillation frequency of 30.37 MHz to produce the second IF signal of 455 kHz. The unwanted near-by signal components are then eliminated by an FM ceramic filter. The resulting signal is input to IC5 again, amplified to the second IF signal, and detected to produce an audio signal.

Item	Rating
Center frequency (fo)	30,825 MHz
Pass bandwidth	± 7.5 kHz or more at 3 dB
Attenuation bandwidth	± 28 kHz or less at 40 dB
Guaranteed attenuation	60 dB or more within Fo ± 1 MHz (Spurious: 40 dB or more)
Ripple	1.5 dB or less
Insertion loss	3 dB or less
Terminating impedance	4.7 kΩ/0pF

**Table 13 MCF (L71-0420-05) (220 TX-RX unit XF1)**

Item	Rating
Nominal center frequency	455KHz
6 dB bandwidth	± 6 kHz or more (from 455 kHz)
50 dB bandwidth	± 12.5 kHz or less (from 455 kHz)
Ripple (within ± 5 kHz of 455 kHz)	3 dB or less
Insertion loss (at maximum output point)	6 dB or less
Guaranteed attenuation (within ± 100 kHz of 455 kHz)	35 dB or more
I/O matching impedance	2.0kΩ

**Table 14 Ceramic filter CFWM455F (L72-0372-05) (220TX-RX unit CF1)**

#### ● Signal-strength meter

The signal-strength meter output voltage of FM IF HIC IC5 (KCD04) is supplied to the control unit.

#### ● Shift-register circuit

The ES, CK, and DT serial data from the control unit are sent to IC1 (BU4094BF) to perform the control operation outlined in the following table:

Pin No.	Name	Function
1	Strobe	Enable input
2	Data	Serial data input
3	Clock	Clock input
4	Q1	TX/RX selection. Low when TX is set.
5	Q2	TX power selection. Low when middle and low. High when high.
6	Q3	TX power selection. Low when high and low. High when middle.
7	Q4	
9	Q3	
10	Q3	
11	Q8	
12	Q7	
13	Q6	
14	Q5	
15	QE	8V

**Table 15**

## CIRCUIT DESCRIPTION

### 220 TX-RX Unit Transmit Signal Channel

#### ● Outline

In the transmission channel, the desired frequency is produced by direct oscillation, and is directly frequency modulated by means of a varicap diode.

#### ● Modulator circuit

The audio signal from the control unit is input to microphone amplifier HIC IC7 (KCA04). IC4 consists of a preemphasis circuit, amplifier, limiter, and splatter circuit that eliminates unwanted high-frequency components. The voltage-controlled oscillator (VFO) signal is directly frequency modulated by means of a varicap diode in the frequency modulator circuit.

#### ● Younger-stage circuit

The signal output from the VCO is input to drive circuit HIC IC8 (KCB15). The amplifier can obtain a stable drive output without adjustment because it has a large bandwidth. An APC circuit controls the collector voltage in the Younger final stage.

#### ● Power amplifier circuit

The drive signal is input to power module IC10 and amplified to the specified level.

#### ● APC circuit

The automatic transmission output control circuit (APC) detects and partially amplifies the power amplifier output with a diode and controls the output control voltage. The control voltage is output in inverse proportion to the output, so the control voltage output is always constant.

#### ● 8T (8 V during transmission) and unlock signal

A 0.7 V voltage is applied to the base of Q13 during reception, Q13 is turned on, and Q14 and Q11 are turned off. No voltage appears at the collector (8T) of Q11. Serial data is output from the control unit during transmission and input to shift register IC1. Pin 4 of IC1 is then made low. Therefore, Q13 is turned off, and Q14 and Q11 are turned on. An 8 V voltage is applied to the collector (8T) of Q11.

The unlock circuit is activated only during transmission. The LD pin signal output from the PLL circuit is ORed with the signal at pin 4 of IC1 using D11, as shown in the figure, so the LD signal is made high during unlock. Therefore, no voltage appears at the collector (8T) of Q11, and no transmission signal is output during reception.

### 220 TX-RX Unit PLL Synthesizer

The VCO and PLL circuits are housed in a solid shielding case as a hybrid integrated circuit. Comparison frequencies are produced by dividing a 12.8 MHz reference oscillation frequency by 2248 and 2560 to correspond to the 5, 10, 12.5, 15, 20, and 25 kHz channel steps.

For 220 MHz, the relationship between  $f_{VCO}$  (RX) and

each frequency division ratio is given by

$$f_{VCO} = (220 + 30.825) = \{(n \times 128) + A\} \times f_{osc} / R$$

Where:  $f_{VCO}$  = VCO output frequency

n: Binary 10-bit programmable counter setting value

A: Binary 7-bit programmable counter setting value

$f_{osc}$ : Reference oscillation frequency of 12.8 MHz

R: Binary 10-bit programmable counter setting value 2560

In this case, n is 295, and A is 75.

$$\text{Therefore, } f_{VCO} = \{(295 \times 128) + 75\} \times 12800 / 2560$$

$$= (33760 + 75) \times 5$$

$$= 189.175 \text{ MHz}$$

The following table lists the pin functions of the PLL circuit:

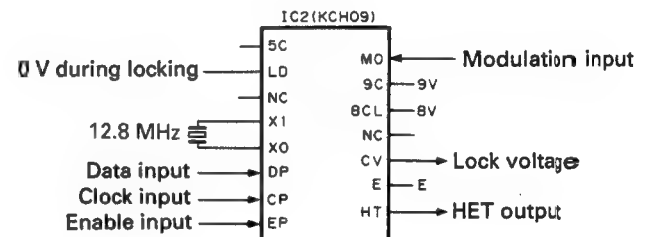


Fig. 15

Pin name	Function	Pin name	Function
5C	5V	MO	Modulation signal input
LD	Lock signal (0 V during locking)	9C	9V
NC	Unused	8CL	8 V (ripple filter)
X1	12.8 MHz crystal oscillation	NC	
XO		CV	Lock voltage output
DP	Data input	E	GND
CP	Clock input	HT	HET output
EP	Enable input		

Table 16 PLL circuit pin functions

# TM-742 A/742 E/942 A


## CIRCUIT DESCRIPTION

### 430 TX-RX Unit Frequency Configuration

The 430 MHz unit incorporates a digital variable-frequency oscillator (VFO) that can freely select a channel step of 5, 10, 12.5, 15, 20, or 25 kHz with a PLL synthesizer system. The frequency in the receive signal channel is mixed with a first local oscillation frequency of 451.6-461.595 MHz (459.6-471.595 MHz for K-models) to produce a first intermediate frequency

of 21.6 MHz. The frequency is then mixed with a second local oscillation frequency of 21.145 MHz to produce a second intermediate frequency of 455 kHz. This is called a double-conversion system.

The signal in the transmission channel is directly oscillated and frequency-divided by a PLL circuit, amplified by a straight amplifier, then transmitted.

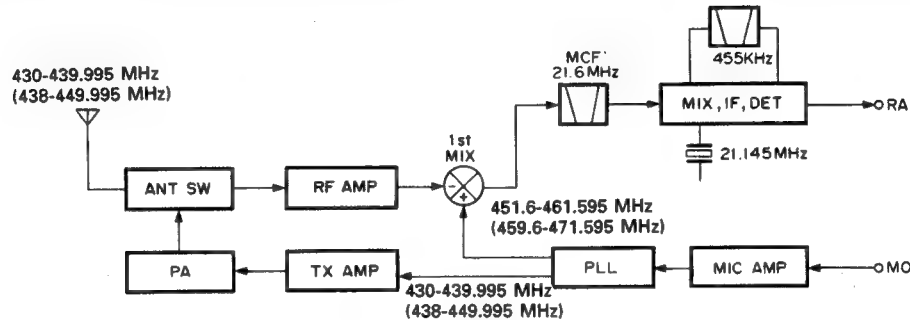

\* The alphanumeric characters enclosed in parentheses are used for K-models.

Fig. 16 Frequency Configuration

### 430 TX-RX Unit Receive Signal Channel

#### • Outline

A 430 MHz band antenna input signal is passed through the antenna selection diode in the final stage and sent through a front-stage antenna matching coil to the high-frequency two-stage amplifier and helical block of a GaAs (gallium arsenide) FET and junction FET. The signal is then input to the first mixer. The first mixer input signal is mixed with the first local signal from the PLL circuit and converted to a first intermediate-frequency signal of 21.6 MHz. The unwanted near-by signal components are then eliminated by a two-stage MCF.

The first intermediate-frequency signal is amplified and input to FM IF HIC IC1 (KCD04). This signal is then mixed with a second local oscillation frequency of

21.145 kHz to produce a second intermediate frequency of 455 kHz. The unwanted near-by components of the intermediate-frequency signal are eliminated by an FM ceramic filter. The intermediate-frequency signal is input to IC1 again. The second intermediate-frequency signal is amplified and detected by IC1 to produce an audio signal.

#### • Signal-strength meter

The signal-strength meter output voltage of FM IF HIC IC1 (KCD04) is supplied to the control unit.

#### • Shift-register circuit

The ES, CK, and DT serial data from the control unit are sent to IC3 (BU4094BF) to perform the control operation outlined in the following table:

Pin No.	Name	Function	Pin No.	Name	Function
1	Strobe	Enable input	9	Q <sub>s</sub>	
2	Data	Serial data input	10	Q' <sub>s</sub>	
3	Clock	Clock input	11	Q8	
4	Q1	TX/RX selection. "L" when TX is set	12	Q7	
5	Q2	TX power selection. "L" when middle and low. "H" when high.	13	Q6	
6	Q3	TX power selection. "L" when high and low. "H" when middle.	14	Q5	
7	Q4		15	OE	8V
8	V <sub>ss</sub>	GND	16	V <sub>DD</sub>	8V

Table 17

## CIRCUIT DESCRIPTION

### 430 TX-RX Unit Transmit Signal Channel

#### ● Outline

In the transmission channel, the desired frequency is directly oscillated and directly frequency modulated by means of a varicap diode.

#### ● Modulator circuit

The audio signal from the control unit is input to microphone amplifier HIC IC2 (KCA04). IC4 consists of a preemphasis circuit, amplifier, limiter, and splatter circuit that eliminate unwanted high-frequency components. The VCO signal is directly frequency modulated by a varicap diode in the frequency modulator circuit.

#### ● Younger-stage circuit

The signal output from the VCO is input to drive circuit HIC IC6 (KCB14). The amplifier can obtain a stable drive output without adjustment because it has a wide

band. An APC circuit controls the collector voltage in the younger final stage.

#### ● Power amplifier circuit

A drive signal is input to power module IC7 and amplified to the specified level.

#### ● APC circuit

The automatic transmission output control circuit (APC) detects and partially amplifies the power module output with a diode and controls the output control voltage. The control voltage is output in inverse proportion to the output, so the control voltage output is always constant. To protect the set against excessive temperature rise, the high-power unit has a thermal switch. The high-power unit is automatically set to a low power by the thermal switch when it exceeds the specified temperature.

### 430 TX-RX Unit PLL Synthesizer

The VCO and PLL circuit are housed in a solid shielding case as a hybrid integrated circuit. Comparison frequencies of 6.25 and 5 kHz are produced by dividing a 12.8 MHz reference oscillation frequency by 2048 and 2560 to correspond to 5, 10, 12.5, 15, 20, or 25 kHz channel steps.

For 430 MHz, the relationship between  $f_{VCO}$  (RX) and each frequency division ratio is given by

$$f_{VCO} = (430 + 21.6) = \{(n \times 128) + A\} \times f_{osc} + R$$

Where:  $f_{VCO}$  = VCO output frequency

n: Binary 10-bit programmable counter setting value

A: Binary 7-bit programmable counter setting value

$f_{osc}$  = Reference oscillation frequency of 12.8 MHz

R: Binary 14-bit programmable counter setting value  
2560 (in 5, 10, 15, and 20 kHz steps)

2048 (in 12.5 and 25 kHz steps)

In 5, 10, 15, and 20 kHz steps, n is 705 and A is 80.

$$\text{Therefore, } f_{VCO} = \{705 \times 128\} \times 12800 / 2560$$

$$= \{90240 + 80\} \times 5$$

$$= 451600$$

$$= 451.6 \text{ MHz}$$

See the 144 MHz band unit (X57-3580-00) for the function of each pin of IC10 in the PLL circuit.

#### ● 8T (8 V during transmission) and unlock signal

See the 144 TX/RX unit description on page 13. (The figure on the under indicates the 430 MHz unit.)

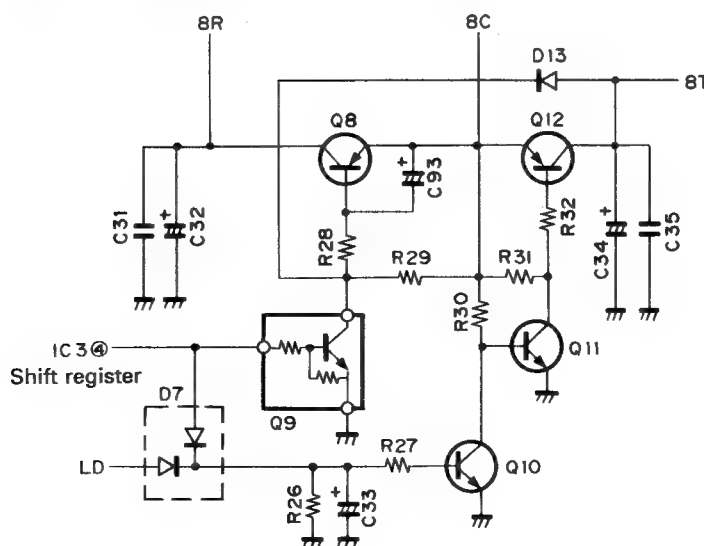


Fig. 17





## CIRCUIT DESCRIPTION

Pin No.	Name	Function	Pin No.	Name	Function
1	Strobe	Enable input	9	Q <sub>s</sub>	
2	Data	Serial data input	10	Q' <sub>s</sub>	
3	Clock	Clock input	11	Q8	TX/RX selection. "L" when TX is set (Set low faster than Q1).
4	Q1	TX/RX selection. "L" when TX is set	12	Q7	ALT. "H" when on.
5	Q2	TX power selection. "L" when middle and low. "H" when high.	13	Q6	
6	Q3	TX power selection. "L" when high and low. "H" when middle.	14	Q5	
7	Q4		15	QE	8V
8	V <sub>ss</sub>	GND	16	V <sub>DD</sub>	8V

Table 18

### 1200 TX-RX Unit Transmit Signal Channel

#### ● Outline

In the transmission channel, the desired frequency is oscillated by half and directly frequency modulated by means of a varicap diode.

#### ● Modulator circuit

The audio signal from the control unit is input to microphone amplifier HIC IC4 (KCA04). IC4 consists of a preemphasis circuit, amplifier, limiter, and splatter circuit that eliminate unwanted high-frequency components. The VCO signal is directly frequency modulated by means of a varicap diode in the frequency modulator circuit.

#### ● Younger-stage circuit

The signal output from the VCO is input to predrive circuit IC7 (KCB09). The amplifier can obtain a stable drive output without adjustment because it has a wide band.

#### ● Power amplifier circuit

The signal amplified in the predrive stage is amplified again by drive circuit HIC IC8 (KCB10), then input to power module IC10 and amplified to the specified level.

#### ● APC circuit

The automatic transmission output control circuit (APC) detects and partially amplifies the power module output with a diode and controls the output control voltage. The control voltage is output in inverse proportion to the output, so the control voltage output is always constant.

#### ● Antenna selection circuit

Figure 19 shows the antenna selection circuit. The receiver circuit obtains a low insertion loss and isolation with a two-stage breaker circuit consisting of a  $\lambda/4$  strip circuit.

The pin diode used as a switching device has a low junction capacitance. The high-frequency capacitance of the diode does not depend on the reverse bias voltage.

Figure 20 shows the equivalent circuit during transmission. A current flows through each diode using 8T. The impedance becomes very low. At that time, the receiver side uses a  $\lambda/4$  strip circuit. Therefore, the impedance becomes very high when the receiver side is viewed from point (A). The voltage from a power module is transferred to the antenna.

Figure 21 shows the equivalent circuit during reception. The bias is switched off, so each diode is in a high-resistance state. The antenna and receiving circuit are connected by a strip line.

# TM-742 A/742 E/942 A

## CIRCUIT DESCRIPTION

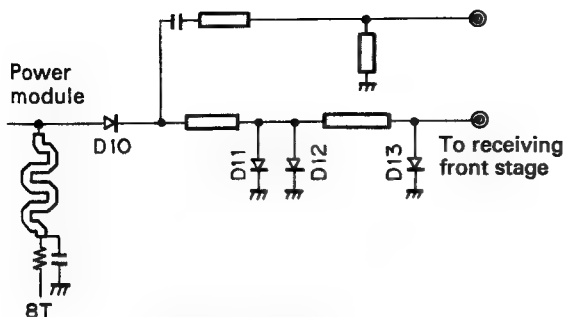


Fig. 19 Antenna Selection Circuit

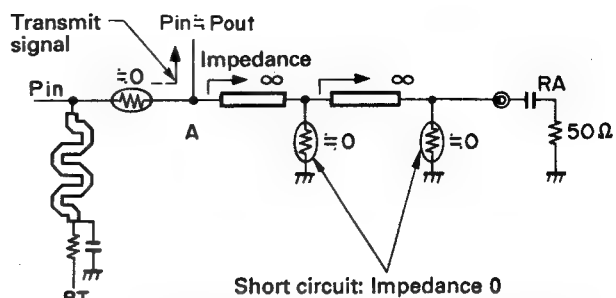


Fig. 20 Equivalent Circuit during Transmission

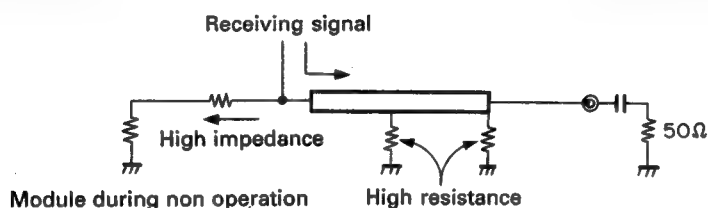


Fig. 21 Equivalent Circuit during Reception

### 1200 TX-RX Unit PLL Synthesizer

The VCO and PLL circuit are housed in .2 solid shielding case as a hybrid integrated circuit. This reduces the electrical and mechanical influence and ensures frequency stability.

The VCO and PLL circuit double the higher harmonics by oscillating and locking a 600 MHz frequency to produce a 1200 MHz band frequency. Comparison frequencies of 5 kHz and 6.25 kHz are produced by dividing a 12.8 MHz frequency of the TCXD by 2560 and 2048 to correspond to 10, 12.5, 20, and 25 kHz channel steps.

The relationship between  $f_{VCO}(RX)$  and each frequency division is given by

$$f_{VCO}(RX) = (f_{RX} - 59.7) / 2 = \{(n \times 128) + A\} \times f_{osc} + R$$

Where:  $f_{VCO}(RX)$  = Previous output frequency that is multiplied by 2 during VCO reception

$f_{RX}$  : Reception frequency

$n$  : Binary 10-bit programmable counter setting value

$A$  : Binary 7-bit programmable counter setting value

$f_{osc}$  : Reference oscillation frequency of 12.8 MHz (TXCO)

$R$  : Binary 14-bit programmable reference counter setting value


2048 (in 12.5 and 25 kHz steps)

2560 (in 10 and 20 kHz steps)

For 1260 MHz,

$$\begin{aligned} f_{VCO}(RX) &= (1260 - 59.7) \\ &= \{(n \times 180) + A\} \times 12800 + 2560 \\ &= 600.15 \text{ MHz} \end{aligned}$$

In this case,  $n$  is 937 and  $A$  is 94.

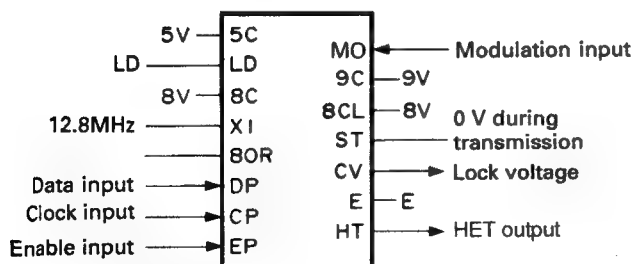

The same as for the 144 MHz unit except 8 V shown in the figure above.

Fig. 22 PLL pin description

Pin name	Function	Pin name	Function
5C	5V	MO	Modulation signal input
LD	Lock signal (on during lock)	9C	9V
NC	Unused	8CL	8V (ripple filter)
XI	12.8 MHz crystal oscillation	ST	0 V during transmission
80R		CV	Lock voltage
DP	Data input	E	GND
CP	Clock input	HT	HET output
EP	Enable input		

Table 19

## CIRCUIT DESCRIPTION

### • Unlock circuit

When a PLL circuit is unlocked during transmission, the LD pin of a IC11 set low and Q12 is set off. Q11 is then set on. The 8T line is not activated when 8T switching control circuit Q13 is set off.

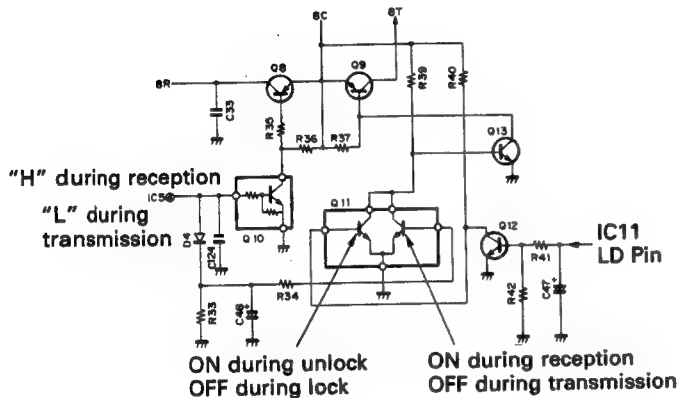


Fig. 23 Unlock Circuit

### • ALT (Automatic Frequency Locked Tuning) Circuit

The block diagram of the ALT unit is shown in Fig. 24

The ALT system uses a portion of the second local oscillator signal, mixer, and the FM IF HIC: KCD04 module to form a feed-back circuit that is used to provide analog automatic frequency control.

When the first IF (59.7 MHz) changes due to a shift in the transmitter frequency a corresponding shift will occur in the second intermediate frequency. A portion of this second IF signal is detected. This correction voltage is amplified (NJM4558M) and is used to control D1 and D2 via analog switch MN4066BS. TP1 can be used to check the value of this control voltage. D1 and D2 are in series with the 59.245 MHz oscillator circuit and provide voltage control of this oscillator (VCXO, Voltage controlled oscillator). Therefore, fluctuations of the second IF cause a corresponding change in the second local oscillator circuit, which keeps the frequency of the second IF within the bandwidth of the IF filter. This system main-

### • Predrive circuit HIC (KCB09)

The VCO output is amplified by Q22, then input to pre-drive circuit HIC IC7. An average 22 to 23 dBm output is obtained by inputting 0 dBm through three-stage (2SC4093 and 2SC3357 x 2) amplification. An alumina board and hybrid integrated circuit are used to ensure stable circuit operation.

### • Drive circuit HIC (KCB10)

The VCO output is amplified by KCB09, then input to drive circuit HIC. An average 29 dBm output is obtained by inputting 20 dBm through one-stage (2SC3814) amplification. An integrated radiation plate and alumina board are used to attain a stable output against heating.


tains close agreement between the transmit and receive frequency bandwidths. (In practice, the receiver frequency and transmit frequency are automatically maintained in close agreement.) The center voltage of the vari-cap diode is set by a voltage divider circuit. Stability of this voltage is maintained by a voltage follower circuit. When the ALT circuit is off, the control voltage applied to the vari-cap diode is switched to this fixed voltage divider circuit in order to set the second local oscillator frequency.

The control voltage for the vari-cap diode is subject to one additional voltage divider stage. During receive this DC signal is applied from the RM line to the microprocessor terminal PTH02 which turns on the tuning indicator light. Switching is performed by the 8R line.

The relationship between the input voltage on the PTH02 terminal and the tuning indicator, and the relationship between the RM voltage and the deviation during receive is shown in Table 20 and Fig. 25

# TM-742 A/742 E/942 A

## CIRCUIT DESCRIPTION

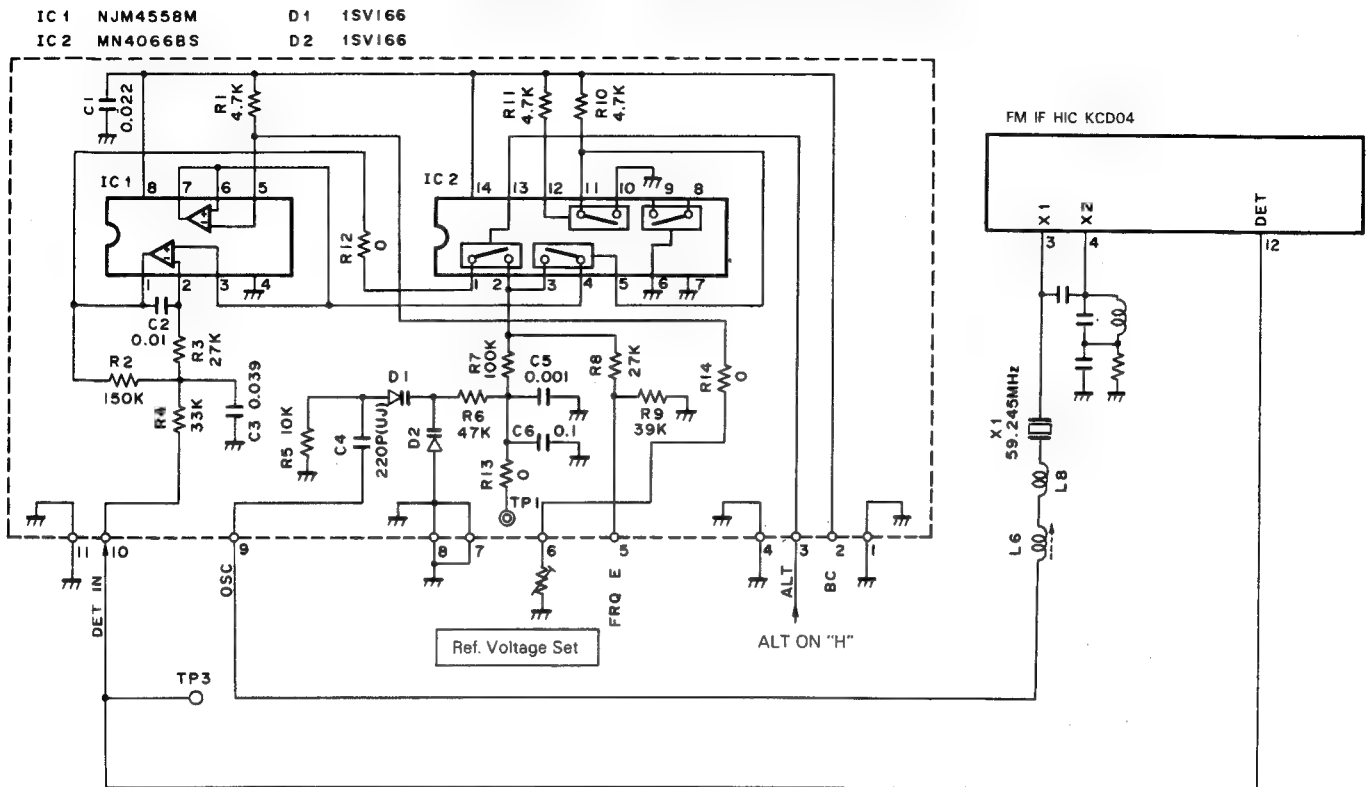

PTH02 input voltage	ALT indicator
0 ~ 1.48 V	Only < turns ON
1.48 ~ 2.79 V	Both < and > turn OFF
2.79 ~ 5.0 V	Only > turns ON

Table 20 Relationship between PTH02 input voltage and the T indicator

### DIGITAL CONTROL UNIT

#### • OUTLINE

The digital control unit consists of the panel unit which comprises the keys, rotary encoder circuit and display circuit, as well as the control unit which comprises the reset backup circuit, the DTMF circuit, the microphone key input circuit, the dimmer circuit, etc.

#### • DATA COMMUNICATION CIRCUIT OF THE PANEL CONTROL UNIT

Figure 26 shows the data communication circuit of the panel control unit. So is the serial data output, SI is the serial data input, and an inverter is located between them to protect the ports of the microprocessor.

The data communication system is asynchronous, and a communication rate of 31250bps is realized.

Since the connection is checked once every 0.5 second by the microprocessor of the control unit side, the power turns OFF when the panel unit is removed.

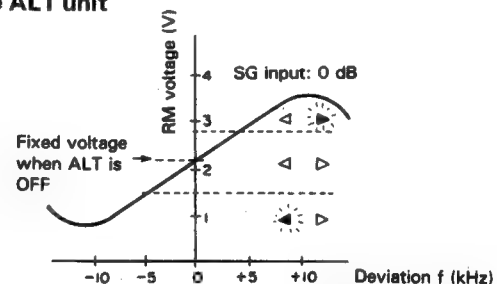




Fig. 25 Relationship between the RM voltage and deviation during receive  
CLOCK IC  
INITIALIZATION

#### • SYSTEM RESET

The POWER ON CLEAR function works automatically and all logics are initialized in this IC (S-3520CF) when the power is turned ON. The system is reset because the POWER ON CLEAR bit (D2 of the CNT2 register) is stuck at "1".

#### • SYSTEM RESET

All logics are initialized when the SYSCR bit is set to "1". When cancelling the reset, SCK falls down after the build-up of CS, as shown in Figure 27.

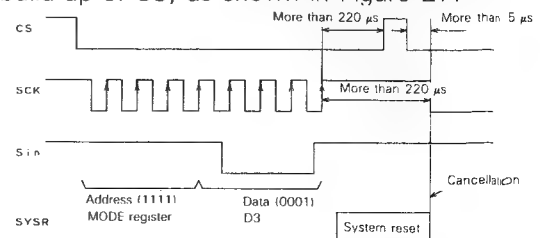

# TM-742 A/742 E/942 A

## CIRCUIT DESCRIPTION

### • INITIAL SETTING MODE SETTING REGISTER

The clock mode is selected by entering the address 1111 and data 0000 (Ordinary-mode/Clock-mode selection) from Sin. (Refer to DATA WRITE for the entry of data).

### CONTROL REGISTER 1

Address 1101 and data 1001 (reference signal output waveform 1 Hz, 24-hour display system) is entered from Sin.

### DATA CONTROL

#### • DATA READ

The read mode is set by sticking CS at "L" and WR at "H". The serial address is entered from Sin, at the leading edge of the upper 4 bits of the SCK clock. (The other 4 bits have nothing to do with this operation). When WR is fetched at the 8th leading edge of the SCK clock, the entered address and its data are outputted from Sout, synchronized with the leading edge of the SCK clock. (Figures 28, 29).

#### • DATA WRITE

The WRITE mode is set by sticking CS to "L" and WR to "L". When the serial address and the data to be written (it is not necessary to write it in the counter) are entered from Sin, they are fetched at the leading edge of the SCK clock. When WR is fetched with the 8th leading edge of the SCK clock, the following data is written in the entered address.

Counter: Increment of the data

Register: 4-bit data entered from Sin

Figure 30, 31 shows the writing timing.

#### • EXAMPLE OF DATA WRITING

Example of counter writing.

Figure 32 shows the example which consists of writing the "minute" column.

Example of register writing.

Figure 33 shows the example which consists of writing in the control register 1.

(Refer to the reset backup circuit for the backup).

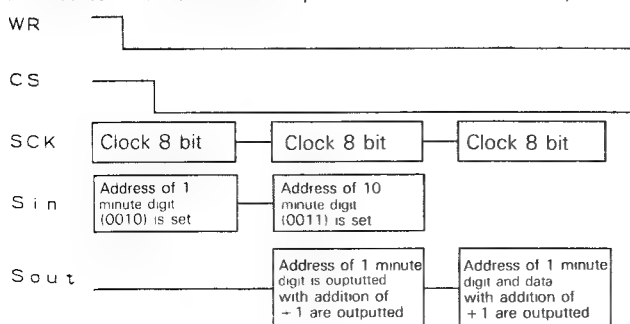


Fig. 32

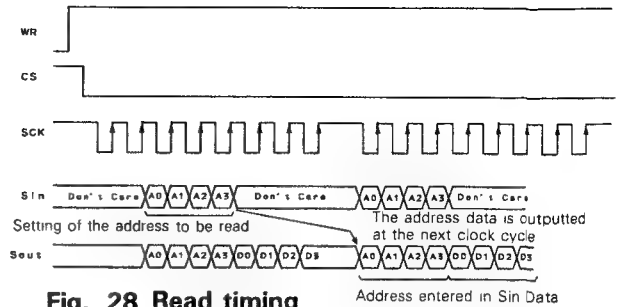


Fig. 28 Read timing

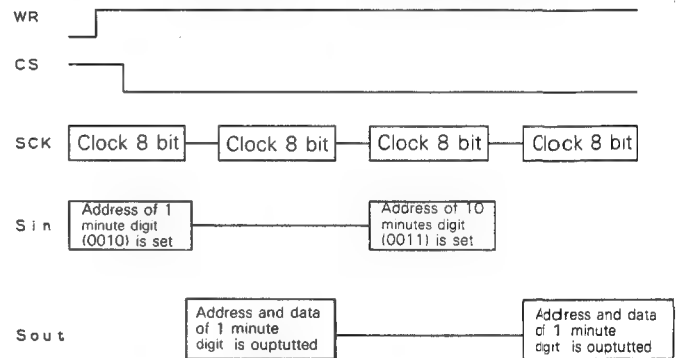


Fig. 29

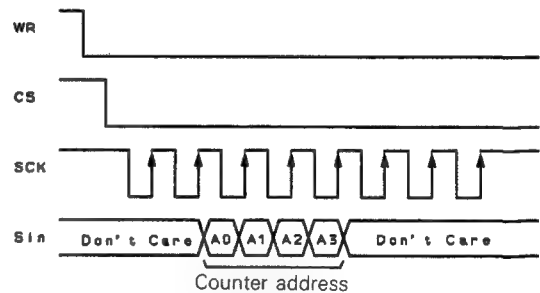


Fig. 30 Counter write timing

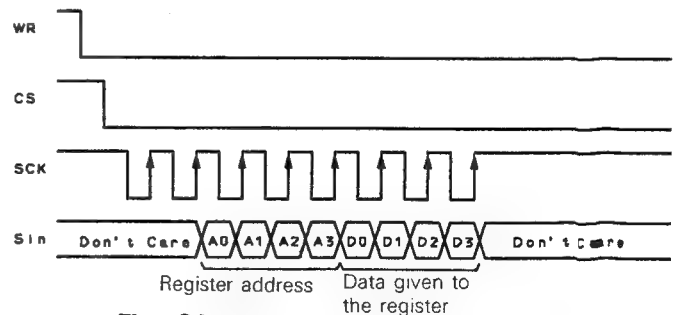


Fig. 31 Register write timing

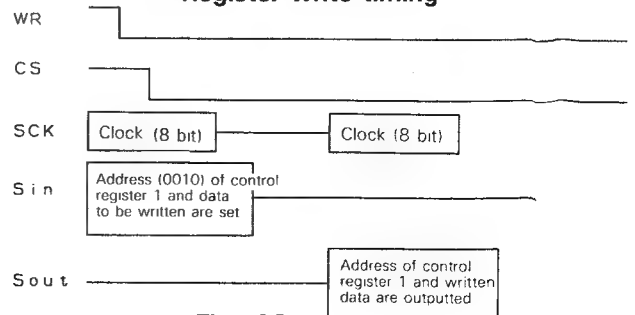


Fig. 33

# TM-742 A/742 E/942 A

## CIRCUIT DESCRIPTION

## PANEL UNIT

### • KEY ROTARY ENCODER INPUT CIRCUIT

Each key of the panel unit is inputted in one port. Moreover, the rotary encoder is directly inputted in the microprocessor.

- **DISPLAY CIRCUIT**

The display circuit consists of two LCD drivers located at the panel unit and their peripheral circuits (Figure 34), and all processings are carried out by the microcomputer located at the panel side.

The LCD features dynamic lighting up with 1/2 duty, and the lighting up contents are sent from the CPU (IC1:

HD404719A26H) to the LCD by serial data transfer.


The LCD display consists of 158 segments.

- **DESCRIPTION OF THE OPERATION**

Normally, the CLOCK line is stuck at "L" and the DATA line is stuck at "H".

Since the shift register consists of  $160 + 160$  bits = 320 bits in series, it must be given 320 bit data every time.

For the ENABLE signal to be outputted, the DATA line is switched H/L 4 times at the point (A) (B), with the CLOCK line stuck at "H" after transmitting 320 bits for MSM5265.

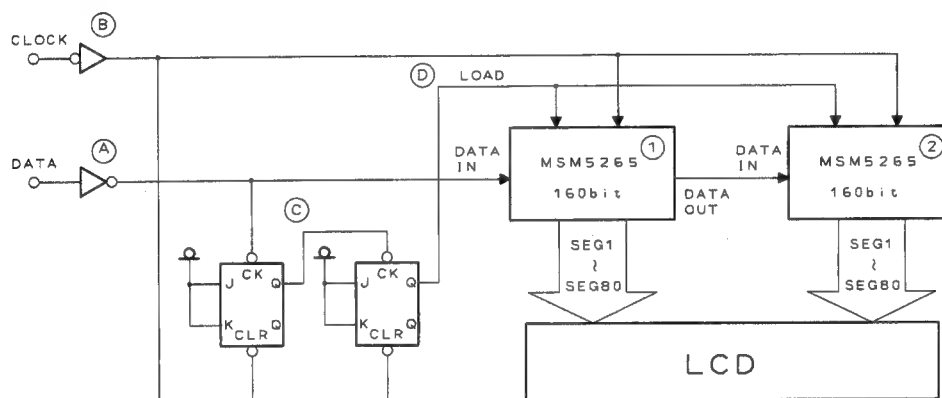

**Fig. 34 Display Circuit**

- **DIMMER CIRCUIT**

The dimmer circuit changes the brightness of the lamps in 6 steps


Figure 35 shows the dimmer circuit, which is built into the IC114 (HIC).

A voltage changeable in 6 steps is outputted from the LB port through the combination of the various LB ports (Q1 to Q3) of the shift register. (Refer to the Shift Register Port Table for the logic).

The display does not light up when the power is turned OFF, because the LB line is switched by means of the LB switch: Q2.

### ● Control band LED lighting circuit

The LED brightness is changed by switching the current to one of two ports for each LED. It is changed in two steps corresponding to lamp dimmers d1, d2, and d3, d4.

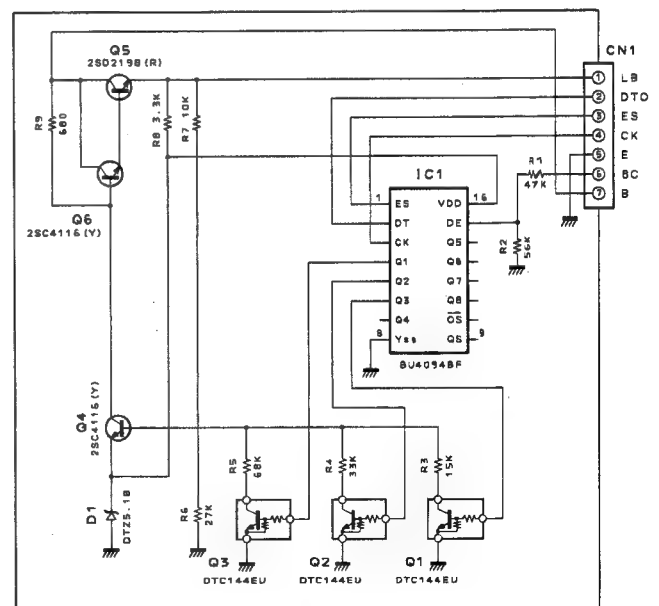

### Fig. 35 Dimmer Circuit

# TM-742 A/742 E/942 A

## CIRCUIT DESCRIPTION

### ● Squelch volume input

The squelch volume for each band works by converting the voltage output by dividing 5 V applied to the variable resistor at the analog port of the microprocessor, and so reads the rotation angle. If the rotation angle changes, a command corresponding to the value is sent to the control unit.

### CONTROL UNIT

#### ● RESET BACKUP CIRCUIT

The "L" level pulse with duration of approximately 20ms is outputted by the RESET IC (IC12) and the RESET

SW (Q5) when the power is turned ON. The CPU is reset by means of this pulse.

When the power is turned OFF, the voltage drop of the 13.8V line is detected, Q6 of the backup circuit turns OFF, Q9 turns ON, and the IRQ terminal is stuck at the "L" level. As a result, the CPU gets in the backup operation. At that time, the voltage VDD is supplied by BA1 via R24/D1. Moreover, the backup circuit is also connected to the clock IC: IC6 (S-3520CF), and it gets in the access inhibit (backup) state when the "L" level is entered. Refer to the Port List for IC6.

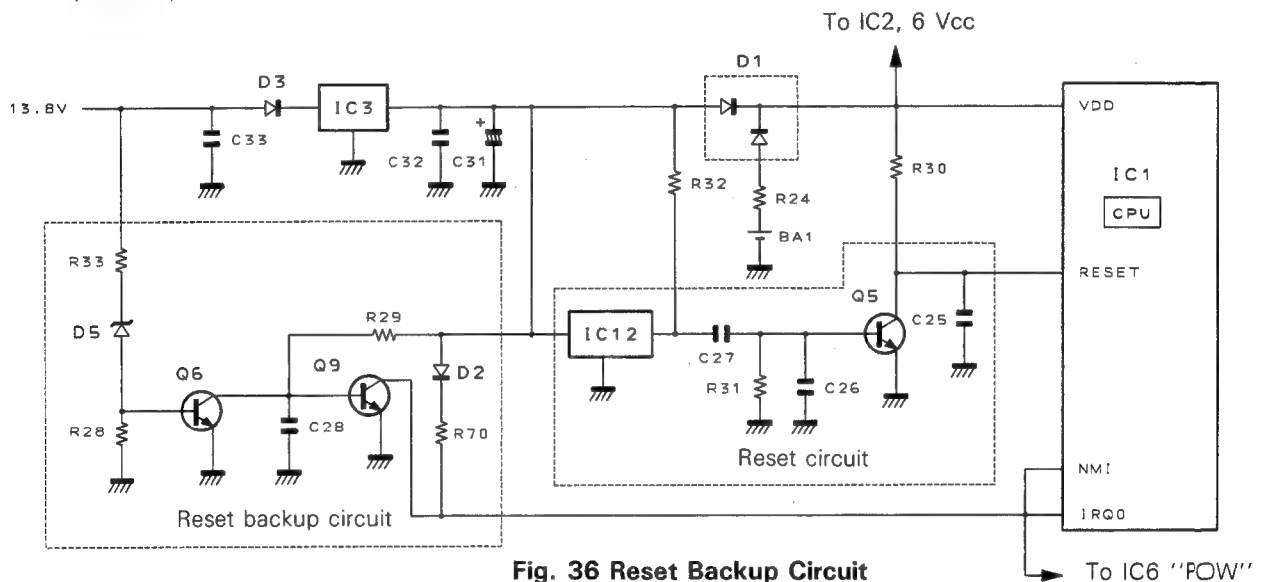


Fig. 36 Reset Backup Circuit

#### ● MICROPHONE/KEY INPUT CIRCUIT

The UP/DOWN keys and the function keys of the microphone are connected to the analog inputs of the microprocessor, and the various functions are operated by the voltage applied when the key is ON. (Figure 37)

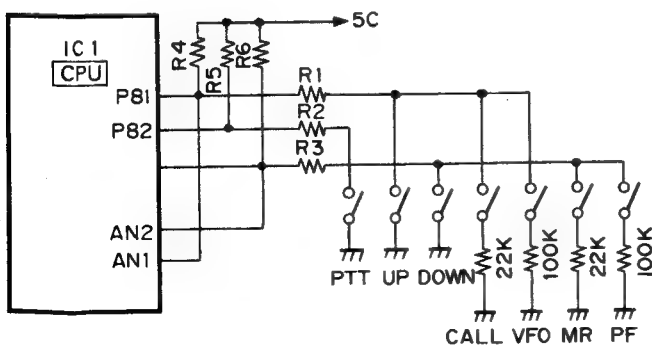


Fig. 37 Microphone key input circuit

#### ● SHIFT REGISTER

Processing of the dimmer, squelch and level functions is carried out by passing serial data from the microprocessor through the shift registers located in IC113 and IC114 (BU4094BF).

The dimmer and the squelch levels are set by 24-bit control, by using 3 shift registers. The first 8 bits of the 24 bits are the dimmer level setting data (shift register C), and the remaining 16 bits are the squelch level setting data (shift registers A, B). (Figure 38)



# TM-742 A/742 E/942 A

## CIRCUIT DESCRIPTION


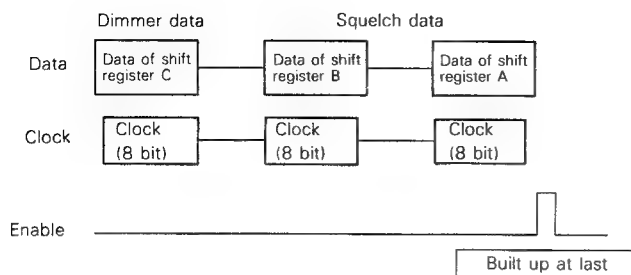


Fig. 38

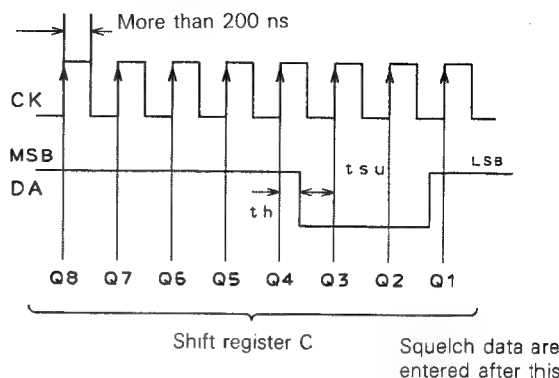

ES

t<sub>h</sub> — More than 40 ns  
t<sub>su</sub> — More than 125 ns


Fig. 39

The dimmer level setting is carried out by using 3 bits out of the 8 bits of the shift register. The remaining 5 bits (Q4 to Q8) are open ports, and they are stuck at "H" during data transmission. (Figure 39)

The squelch level is set by using the 16-bit data that

follow the 8-bit data used for setting the dimmer level. (Figure 40)

Refer to the SHIFT REGISTER PORT SPECIFICATION LIST for the port specifications of each shift register.

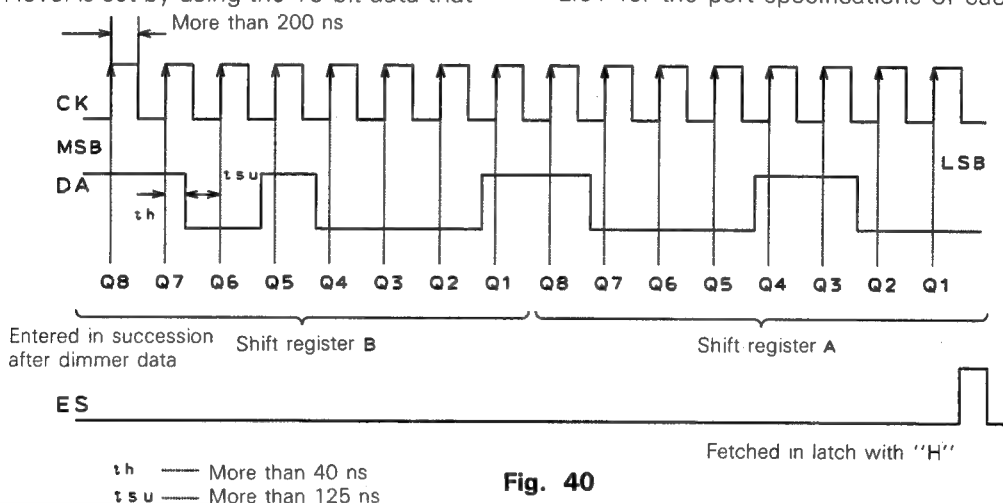

ES

t<sub>h</sub> — More than 40 ns  
t<sub>su</sub> — More than 125 ns

Fig. 40

### SHIFT REGISTER PORT SPECIFICATION LIST (VOL, SQ HIC) CONTROL UNIT (X53-346X-XX)

#### SHIFT REGISTER A 4094: BUILT INTO IC113

S. Reg Port	Pin No.	Port Data Name	SA VE	Bac kup	Function	Circuit Terminal name
Q1	4	PD__RDMUT			RD mute 0: ON 1: OFF	RD MUTE
Q2	5	PD__SQA0			BAND A squelch level adjustment (bit 0) 0: There is resistance 1: No resistance	
Q3	6	PD__SQA1			BAND A squelch level adjustment (bit 1) 0: There is resistance 1: No resistance	
Q4	7	PD__SQA2			BAND A squelch level adjustment (bit 2) 0: There is resistance 1: No resistance	
Q5	14	PD__SQA3			BAND A squelch level adjustment (bit,3) 0: There is resistance 1: No resistance	
Q6	13	PD__SQA4			BAND A squelch level adjustment (bit 4) 0: There is resistance 1: No resistance	
Q7	12	PD__SQB0			BAND B squelch level adjustment (bit 0) 0: There is resistance 1: No resistance	
Q8	11	PD__SQB1			BAND B squelch level adjustment (bit 1) 0: There is resistance 1: No resistance	

# TM-742 A/742 E/942 A

## CIRCUIT DESCRIPTION

### Shift register B 4094

S. Reg Port	Pin No.	Port Data Name	SA VE	Bac kup	Function	Circuit Terminal name
Q1	4	PD__SQB2			Band B squelch level adjustment (bit 2) 0: There is resistance 1: No resistance	
Q2	5	PD__SQB3			BAND B squelch level adjustment (bit 3) 0: There is resistance 1: No resistance	
Q3	6	PD__SQB4			BAND B squelch level adjustment (bit 4) 0: There is resistance 1: No resistance	
Q4	7	PD__SQC0			BAND C squelch level adjustment (bit 0) 0: There is resistance 1: No resistance	
Q5	14	PD__SQC1			BAND C squelch level adjustment (bit 1) 0: There is resistance 1: No resistance	
Q6	13	PD__SQC2			BAND C squelch level adjustment (bit 2) 0: There is resistance 1: No resistance	
Q7	12	PD__SQC3			BAND C squelch level adjustment (bit 3) 0: There is resistance 1: No resistance	
Q8	11	PD__SQC4			BAND C squelch level adjustment (bit 4) 0: There is resistance 1: No resistance	

All bits are stuck at "H" (H'IF) when MONI ON.

Data coming from the panel are inverted when they enter the shift register.

### CONTROL UNIT (X53-346X-XX)

#### SHIFT REGISTER C 4094: BUILT INTO IC114

S. Reg Port	Pin No.	Port Data Name	SA VE	Bac kup	Function	Circuit Terminal name
Q1	4	PD__			For dimmer level adjustment (Bit 0) Refer to the table below for the logic.	
Q2	5	PD__			For dimmer level adjustment (Bit 1) Refer to the table below for the logic.	
Q3	6	PD__			For dimmer level adjustment (Bit 2) Refer to the table below for the logic.	
Q4	7	PD__			Open port, the bit is stuck at "1"	
Q5	14	PD__			↑	
Q6	13	PD__			↑	
Q7	12	PD__			↑	
Q8	11	PD__			↑	

Data coming from the panel are inverted when they enter the shift register.

#### Port logic versus dimmer level correspondence lit


Dimmer level	Q3 (bit 2)	Q2 (bit 1)	Q1 (bit 0)
d1	0	1	0
d2	0	1	1
d3	1	0	0
d4	1	0	1
d5	1	1	0
d6	1	1	1

# TM-742 A/742 E/942 A

## CIRCUIT DESCRIPTION

### I/O PORT SPECIFICATION LIST

CONTROL UNIT (X53-346X-XX): IC1 (HD6433388A04F)

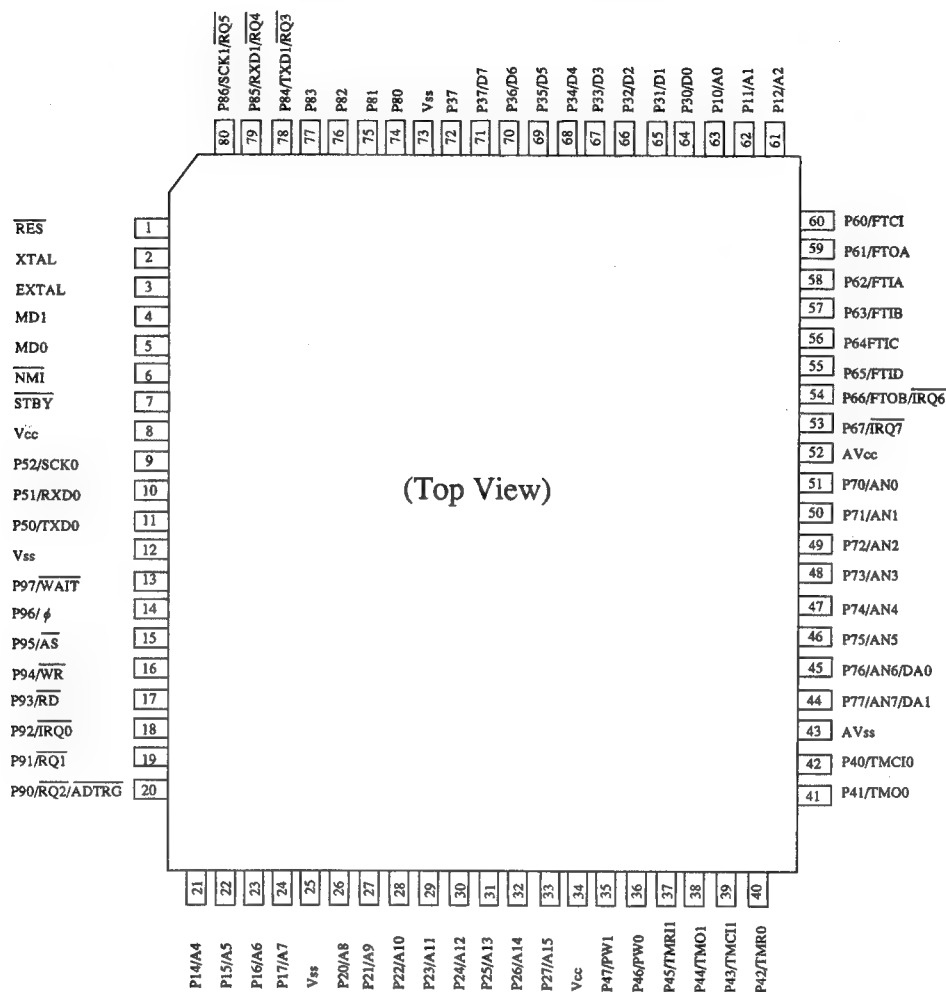

HD6433388A04F I/O PORT LIST: IC1

μCOM Port	Port Name	I/O	Pull up	Back up	Control	Circuit Terminal name
RES	P__RES	I			Reset terminal      0: Reset state      1: Ordinary state	
MD1	P__MD1	I			Operation mode (Mode 2) setting. Set to 1	
MD0	P__MD0	I			Operation mode (Mode 2) setting. Set to 0	
STBY		I			Set to 1	
P10 A0	P__A0	O		I	External RAM, I/O Expander Address	
P11 A1	P__A1	O		I	↑	
P12 A2	P__A2	O		I	↑	

# TM-742 A/742 E/942 A

## CIRCUIT DESCRIPTION

### HD6433388A04FI/O PORT LIST

$\mu$ COM Port	Port Name	I/O	Pull up	Back up	Contents	Circuit Terminal name
P13 A3	P__A3	O		I	External RAM Address	
P14 A4	P__A4	O		I	↑	
P15 A5	P__A5	O		I	↑	
P16 A6	P__A6	O		I	↑	
P17 A7	P__A7	O		I	↑	
P20 A8	P__A8	O		I	↑	
P21 A9	P__A9	O		I	↑	
P22 A10	P__A10	O		I	↑	
P23 A11	P__A11	O		I	↑	
P24 A12	P__A12	O		I	↑	
P25 A13	P__RAMCE2	O		I	External RAM CE2	CE2
P26 A14	P__RAMCE11	O		I	External RAM CE1 Input composing AND with P__RAMCE12	CE1
P27 A15	P__RAMCE12	O		I	External RAM CE1 Input composing AND with P__RAMCE11	↑
P30 D0	P__DAT0	I/O		I	External RAM, I/O Expander data	
P31 D1	P__DAT1	I/O		I	↑	
P32 D2	P__DAT2	I/O		I	↑	
P33 D3	P__DAT3	I/O		I	↑	

# TM-742 A/742 E/942 A

## CIRCUIT DESCRIPTION

### HD6433388A04FI/O PORT LIST

$\mu$ COM Port	Port Name	I/O	Pull up	Back up	Content	Circuit Terminal name
P34 D4	P__DAT4	I/O		I	External RAM, I/O Expander data	
P35 D5	P__DAT5	I/O		I	↑	
P36 D6	P__DAT6	I/O		I	↑	
P37 D7	P__DAT7	I/O		I	↑	
P40 TMC10	P__CKCS	O		I	Clock chip select S3520CF CS 0: Selected state 1: High impedance	
P41 TMO0	P__CKSOUT	I		I	Clock data input S3520CF SOUT	
P42 TMR10	P__CKWR	O		I	Clock write select S3520CF WR 0: Write 1: Read	
P43 TMC11	P__CKSIN	O		I	Clock data output/CTCSS Unit Data S3520CF SIN	
P44 TMO1	P__BEEP	O		I	"Beep" sound output terminal (Effect sound) Stuck at the "L" level when there is no output of the "Beep" sound.	BZ
P45 TMR10	P__PSW	O		I	Power switch. 0: Power ON 1: Power OFF	PSW
P46 PW0	P__TONE	O		I	Sub-tone	
P47 PW1	P__CKSCK	O		I	Clock synchronism signal output (S3520CF SCK)/Serial→ Parallel conversion (HD74HC165F)/CTCSS Unit Clock	
P50 TXD0	P__SO	O	●		Panel microprocessor SI	
P51 RXD0	P__SI	I	●		Panel microprocessor SO	
P52 SCK0	P__Q165	I			Parallel→Serial conversion (HD74HC165F) input Destination, repeater function provided/not-provided, FAN SW, etc.	
P60 FTC1	P__DTDA0	I/O		I	DTMF Data (D4/Q1)	
P61 FTOA	P__DTDA1	I/O		I	DTMF Data (D3/Q2)	

# TM-742 A/742 E/942 A

## CIRCUIT DESCRIPTION

### HD6433388A04F I/O PORT LIST

$\mu$ COM Port	Port Name	I/O	Pull up	Back up	Content	Circuit Terminal name
P62 FTIA	P__DTDA2	I/O		I	DTMF Data (D2/Q3)	
P63 FTIB	P__DTDA3	I/O		I	DTMF Data (D1/Q4)	
P64 FTIC	P__STD	I		I	DTMF detection (LC7385 StD) 0: No signal 1: Signal detected	DV
P65 FTID	P__DTSEL	O		I	DTSS unit switching 0: Detection output 1: MIC	DTSEL
P66 FTOB IRQ6	P__DTCE	O		I	DTMF tone generator TC35219 TOE 0: No output a: Tone output	CE
P67 IRQ7	P__DTOE	O		I	DTMF receiver LC7385 TOE 0: High impedance 1: Enable	EN
P70 AN0	P__DOWN	O	•	I	Mic. DOWN (Port shared with RXD1) MR, PF	
P71 AN1	P__UP	I	•	I	Mic. UP (Port shared with SCK1) CALL, VFO	
P72 AN2	P__ALTA	I		I	BAND Unit A ALT input	
P73 AN3	P__ALTB	I		I	BAND Unit B ALT input	
P74 AN4	P__ALTC	I		I	BAND Unit C ALT input	
P75 AN5	P__SMA	I		I	BAND Unit A S meter input	
P76 AN6	P__SMB	I		I	BAND Unit B S meter input	
P77 AN7	P__SMC	I		I	BAND Unit C S meter input	

# TM-742 A/742 E/942 A

## CIRCUIT DESCRIPTION

### HD6433388A04F I/O PORT LIST

$\mu$ COM Port	Port Name	I/O	Pull up	Back up	Content	Circuit Terminal name
P80	P__ET	O I	●	I	CTCSS Unit Enable connection check 0: CONNECT 1: NO CONNECT	ET
P81	P__CTCSS	I		I	CTCSS DETECT 0: Tone coincidence 1: No tone coincidence	SD0
P82	P__MMUTE	O		I	Mic MUTE 0: MUTE OFF 0: MUTE ON	
P83	P__KBRD	I	▲	I	CONTROLLER CHECK 1 NEW KENWOOD BUS (RD)	KBRD
P84 TXD1 IRQ3	P__KBSO (P__PTT)	I/O	●	I	NEW KENWOOD BUS (SO) 0 Mic. PTT 1	KBSO
P85 RXD1 IRQ4	P__KBSI	I	●	I	NEW KENWOOD BUS (SI) 1 Shared with Mic. DOWN terminal (AN0)	KBSI
P86 SCK1 IRQ5	P__KBCK	I/O	●	I	NEW KENWOOD BUS (Clock) 1 Shared with Mic. UP terminal (AN1)	KBCK
P90 ADTRG IRQ2	P__RPTON	O		I	Operation of REPEATER 0: ON function 1: OFF	
P91 IRQ1	P__TPOUT	I		I	Clock reference signal input S-3520 TPout	
P92 IRQ0	P__VF	I		I	Power check 0: During backup 1: During operation	
P93 RD	P__RD	O		I	External RAM, I/O Expander read control signal 0: External read 1: Inhibit	
P94 WR	P__WR	O		I	External RAM, I/O Expander write control signal 0: External read 1: Inhibit	

- △: Pull-up only when checked by software. (Care must be taken, because P\_\_ET is stuck at "H" during check).  
 ○: Pull-up only when stuck at "H", during input with software.  
 ●: Pull-up with hardware.  
 ▲: Pull-down with hardware.



## CIRCUIT DESCRIPTION

### I/O EXPANDER PORT SPECIFICATION LIST

#### CONTROL UNIT (X53-346X-XX)

#### CXD1095Q I/O PORT LIST IC101

Port	I/O	Backup	Content	Circuit terminal name
PA0	O		Operation unit switching of CTCSS *1	CTC1
PA1			Operation unit switching of CTCSS *1	CTC2
PA2			Detection output connection unit switching *3	RD1
PA3			Detection output connection unit switching *3	RD2
PA4	O		Operation unit switching of DTSS *2	DTS1
PA5			Operation unit switching of DTSS *2	DTS2
PA6			FAN ON/OFF 0: OFF 1: ON	FANSW
PA7			Power switch other than 5C 0: OFF 1: ON	PWS2
PB0	O		Volume, squelch HIC Data	VOLSQDA
PB1			Volume, squelch HIC Clock	VOLSQCK
PB2			Squelch Enable 0: No change 1: Data fetched in latch	SQES
PB3			Electronic volume 2 Enable. Data latch at (1→0)	VOLCSA
PB4	O		Electronic volume 1 Enable. Data latch at leading edge (1→0)	VOLCSB
PB5			BEEP MUTE BAND A 0: MUTE OFF 1: MUTE ON	MUTEA
PB6			BEEP MUTE BAND C 0: MUTE OFF 1: MUTE ON	MUTEC
PB7			BEEP MUTE BAND B 0: MUTE OFF 1: MUTE ON	MUTEB
PC0	I		BAND Unit A busy input 0: BUSY 1: CLOSE	SCA
PC1			BNAD Unit B Busy input 0: BUSY 1: CLOSE	SCB
PC2			BNAD Unit C Busy input 0: BUSY 1: CLOSE	SCC
PC4	I/O		BAND Unit A shift Register Enable	ESA
PC5			BAND Unit A PLL/Shift Register Data *1	DTA
PC6			BAND Unit A PLL/Shift Register Clock*1	CKA
PC7			BAND Unit A PLL Enable *1	EPA
PD0	I/O		BAND Unit B Shift Register Enable	ESB
PD1			BAND Unit B PLL/Shift Register Data *2	DTB
PD2			BAND Unit B PLL/Shift Register Clock*2	CKB
PD3			BAND Unit B PLL Enable *2	EPB
PD4	I/O		BAND Unit C Shift Register Enable	ESC
PD5			BAND Unit C PLL/Shift Register Data *3	DTC
PD6			BAND Unit C PLL/Shift Register Clock*3	CKC
PD7			BAND Unit C PLL Enable *3	EPC

# TM-742A/742E/942A

## CIRCUIT DESCRIPTION

### CXD1095Q I/O PORT LIST

Port	I/O	Backup	Content	Circuit terminal name
PE0	O		Shift Register (HD74HC165F) S/L terminal 0: Latch asynchronous with clock 1: Latch at loading edge of clock	LOAD165
PE1	O		AF MUTE BAND A 0: MUTE OFF 1: MUTE ON	
PE2	O		AF MUTE BAND B 0: MUTE OFF 1: MUTE ON	
PE3	O		AF MUTE BAND C 0: MUTE OFF 1: MUTE ON	

\*1, \*2, \*3 Types of band units

BAND Unit	EP X	CK X	DT X	Unit No.	Number after conversion
No unit	0	0	0	0	0
28 MHz BAND	0	0	1	1	1
50 MHz BAND	0	1	1	3	2
144 MHz BAND	1	1	0	6	3
220 MHz BAND	0	1	0	2	4
430 MHz BAND	1	0	1	5	5
1200 MHz BAND	1	0	0	4	6

NOTE: X is A, B or C

The number after conversion is used on the program

\*1, \*2, \*3

CTC2	CTC1	CTCSS operation unit
DTS2	DTS1	DTSS operation unit
RD2	RD1	Detected output connection unit
0	0	A
0	1	B
1	X	C

## CIRCUIT DESCRIPTION

### TERMINAL LIST OF CLOCK IC (S-3520CF)

### CONTROL UNIT (X53-346X-XX)

### SERIAL TIME CLOCK (S-3520CF): IC6

Terminal No.	Name	Function	H8/337 connection terminal name
4	SCK	Synchronous signal input terminal of serial I/O 8 clocks/cycle	P47
5	Sin	Serial address/data input terminal Entry of address of counter or address/data of register/RAM.	P43
9	Sout	Serial address/data output terminal.	P41
6	WR	Write selection terminal. WR = "L": Write WR = "H": Read	P42
11	CS	Chip select terminal CS = "L": Selected state CS = "H": Sout gets at high impedance state	P40
10	PDW	System power supply leading edge check signal. Connected to power down detection circuit Stuck at "H" when PDW is not used Access disable irrespective of CS when fixed PSW = "L". (Sout, TPout get at high impedance state).	—
8	TPout	Reference signal output terminal, 1 Hz/1024Hz switching output.	P91

### Control Unit (X53-346X-XX): IC6 (S-3520CF)

#### ADDRESS CORRESPONDENCE LIST

Address (A3 to A0)	Clock mode (MODE 0)
0000	1-second column counter
0001	10-second column counter
0010	1-minute column counter
0011	10-minute column counter
0100	1-hour column counter
0101	10-hour column counter
0110	Day (of the week) counter
0111	1-day column counter
1000	10-day column counter
1001	1-month column counter
1010	10-month column counter
1011	1-year column counter
1100	10-year column counter
1101	Control register 1
1110	Control register 2
1111	Mode setting register

The contents of the counter and the register can be read and rectified by handling the 4-bit address and data as a set. The addresses are allocated as shown in the table below.

### REGISTER CONTROL

#### • MODE SETTING REGISTER

Switches the clock mode and the SRAM mode, and resets the system.

#### MODE SETTING REGISTER (MODE, 1111)

D3	D2	D1	D0
SYSR	TEST	MS1	MS0

0 fixed Clock mode selected  
"00" entered

SYSR is used to clear the counter and the register. The system is reset when it is stuck at "1", and gets at the ordinary mode when it is stuck at "0".

MS0 and MS1 are used to switch the mode. Since the clock mode is used this time, "0""0" is entered in these registers

#### CONTROL REGISTER 1 (CNT1, 1101)

D3	D2	D1	D0
TPS	30ADJ	CNTR	24/12

# TM-742 A/742 E/942 A

## CIRCUIT DESCRIPTION

TPS is used to select the reference signal output waveform, 1 Hz is outputted when it is "1", and 1024Hz is outputted when it is "0". Since 1Hz output is selected this time, it is stuck at "1".

30ADJ is used to carry out  $\pm 30$ -second adjustment, and  $\pm 30$ -second adjustment is carried out when it is stuck at "1". The operation gets at the ordinary mode when it is stuck at "0".

CNTR is used to reset the counter. The operation gets in the reset mode when it is stuck at "1", and after that the content of the specified counter is reset. The operation gets at the ordinary mode when it is stuck at "0".

24/12 is used to switch the display mode. The 24-hour display mode is selected when it is stuck at "1", and the 12-hour display mode is selected when it is stuck at "0".

This time it is stuck at "1", because the 24-hour display mode is selected.

### • CONTROL REGISTER 2

This is the flat used to detect the state when the operation is in the clock mode.

#### CONTROL REGISTER 2 (CNT2, 1110)

D3	D2	D1	D0
STA	DET	0	0

STA is used to check the end-around carry of the time and the calendar. It is stuck at "1" when end-around carry is in progress, and at "0" when there is no end-around carry.

DET is used to check the power ON clear detection. It is stuck at "1" when power ON clear is detected, and at "0" in the ordinary mode.

### LIST OF TERMINALS OF THE PARALLEL → SERIAL CONVERTER IC (PARALLEL IN, SERIAL OUT) CONTROL UNIT (X53-346X-XX)

#### 8-bit Shift Register (HD74HC165F): IC7

Terminal No.	Name	Function	I/O Expander terminal name
1	S/L	Data shift/load selection terminal S/L = "L": Data entered in the 8 inputs (A to H) are stored in the various registers, asynchronously with the clock. S/L = "H": Successive shift operations are carried out at the leading edge of the various flip-flops.	PB5
2	CLOCK	Data shift synchronization signal input terminal	PB1
14	D (P_B3)	Parallel input terminal (bit 3). Destination data (bit 3) 0: Destination bit "0" 1: Destination bit "1"	
13	C (P_B2)	Parallel input terminal (bit 2). Destination data (bit 2) 0: Destination bit "0" 1: Destination bit "1"	
12	B (P_B1)	Parallel input terminal (bit 1). Destination data (bit 1) 0: Destination bit "0" 1: Destination bit "1"	
11	A (P_B0)	Parallel input terminal (bit 0). Destination data (bit 0) 0: Destination bit "0" 1: Destination bit "1"	
9	QH	Serial data output terminal	PC3
10	SI	Serial data input terminal	
6	H (P_RPT)	Parallel input terminal (bit 7). Existence of repeater function 0: No repeater function 1: Repeater function	
5	G (P_FANDL I)	Parallel input terminal (bit 6). FAN delay time setting (bit 1) *1 The time is set in combination with terminal No.4.	

# TM-742 A/742 E/942 A

## CIRCUIT DESCRIPTION


### 8-bit Shift Register (HD74HC165F): IC7

Terminal No.	Name	Function	I/O Expander terminal name
4	F (P_FANDL0)	Parallel input terminal (bit 5). FAN delay time setting (bit 0) *1 The time is set in combination with terminal No.5.	
3	E (P_MDFY)	Parallel input terminal (bit 4). Transmission remodeling data (bit 4) 0: Remodeling 1: No remodeling	

\*1 FAN Delay Time setting input

FAN control	P_FANDL 1	P_FANDL 0
Permanently ON when POWER is ON	0	0
ON during transmission	0	1
ON during transmission + ON during 1 minute after end of transmission	1	0
ON during transmission + ON during 2 minutes after end of transmission	1	1

#### • TIMING CHART

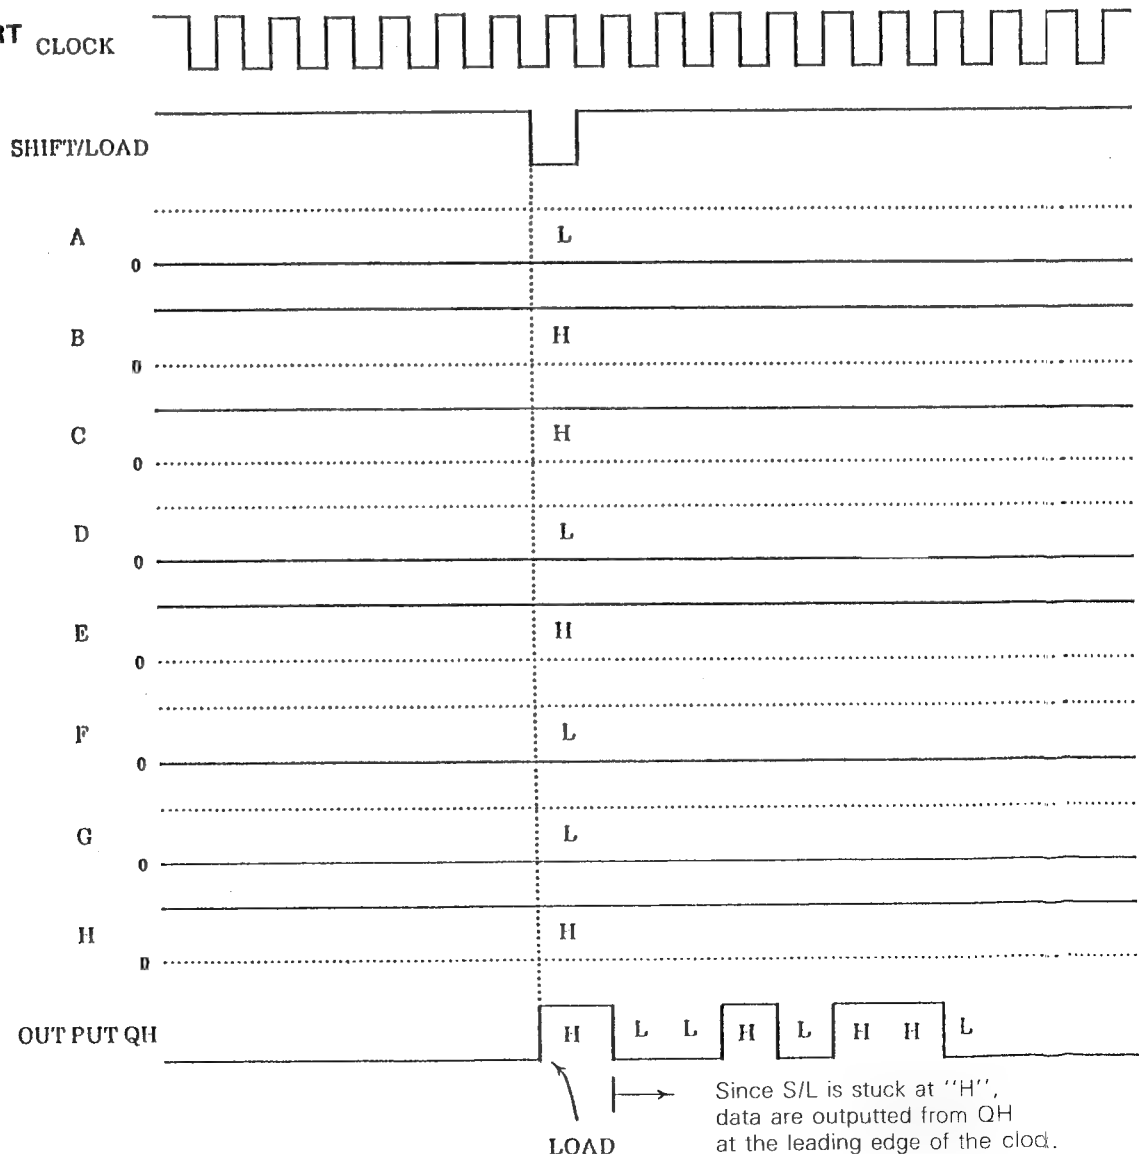


# TM-742 A/742 E/942 A

## CIRCUIT DESCRIPTION

I/O PORT SPECIFICATION LIST

DISPLAY UNIT (X54-3130-11): IC1 (HD404719A26H)

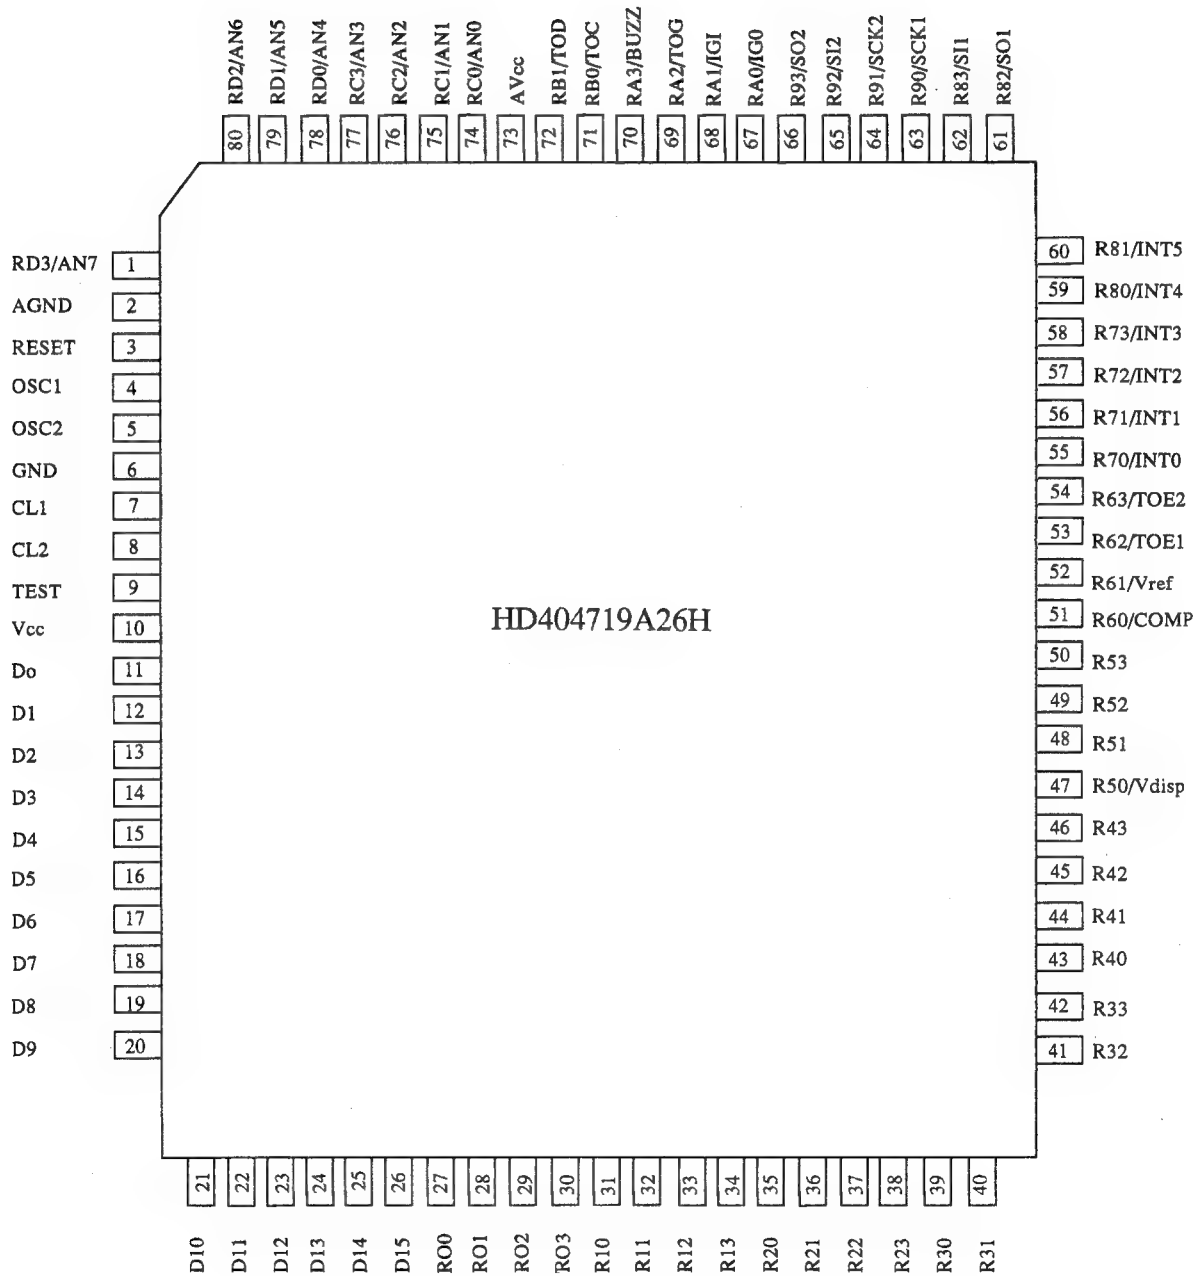

# TM-742 A/742 E/942 A

## CIRCUIT DESCRIPTION

**HD404719A26H I/O PORT LIST: IC1**

PIN NO.	$\mu$ COM Port	Port name	I/O		Pull Up	Content
			PS ON	PS OFF		
1	RD3/AN7		I	I		GND (DONT USE)
2	AGND					GND
3	RESET		I	I	$\bigcirc$ 5 M	RESET
4	OSC <sub>1</sub>		I	I		4 MHz Xtal ①
5	OSC <sub>2</sub>		O	O		4 MHz Xtal ②
6	GND					GND
7	CL <sub>1</sub>		I	I		NC (V <sub>cc</sub> )
8	CL <sub>2</sub>		O	O		NC (OPEN)
9	*TEST		I	I		5 V (5M)
10	V <sub>cc</sub>					5 V (5M)
11	D <sub>0</sub>	PD <sub>0</sub> PSW	I	I		PSW L: ON
12	D <sub>1</sub>	PD <sub>0</sub> VFO	I	I		VFO
13	D <sub>2</sub>	PD <sub>0</sub> MR	I	I		MR
14	D <sub>3</sub>	PD <sub>0</sub> CALL	I	I		CALL
15	D <sub>4</sub>	PD <sub>0</sub> F	I	I		F
16	D <sub>5</sub>	PD <sub>0</sub> BELL	I	I		BELL
17	D <sub>6</sub>	PD <sub>0</sub> TONE	I	I		TONE
18	D <sub>7</sub>	PD <sub>0</sub> REV	I	I		REV
19	D <sub>8</sub>	PD <sub>0</sub> DTSS	I	I		DTSS
20	D <sub>9</sub>	PD <sub>0</sub> LOW	I	I		LOW
21	D <sub>10</sub>	PD <sub>0</sub> MUTE	I	I		MUTE
22	D <sub>11</sub>	PD <sub>0</sub> LINK	I	I		RC
23	D <sub>12</sub>	PD <sub>0</sub> MHZ	I	I		MHz
24	D <sub>13</sub>	PD <sub>0</sub> CSA	I	I		C SEL A
25	D <sub>14</sub>	PD <sub>0</sub> CSB	I	I		C SEL B
26	D <sub>15</sub>	PD <sub>0</sub> CSC	I	I		C SEL C
27	RO <sub>0</sub>	PD <sub>0</sub> BSA	I	I		B SEL A
28	RO <sub>1</sub>	PD <sub>0</sub> BSB	I	I		B SEL B
29	RO <sub>2</sub>	PD <sub>0</sub> BSC	I	I		B SEL C

# TM-742 A/742 E/942 A

## CIRCUIT DESCRIPTION

### HD404719A26H I/O PORT LIST: IC1

PIN NO.	$\mu$ COM Port	Port name	I/O		Pull Up	Content
			PS ON	PS OFF		
30	R03/AN7		I	I		NC (Vcc)
31	RI0		O	O(L)		CS LED A GRN ① *I
32	RI1		O	O(L)		CS LED A GRN ② *I
33	RI2		O	O(L)		CS LED A RED ① *I
34	RI3		O	O(L)		CS LED A RED ② *I
35	R20		O	O(L)		CS LED B GRN ① *I
36	R21		O	O(L)		CS LED B GRN ② *I
37	R22		O	O(L)		CS LED B RED ① *I
38	R23		O	O(L)		CS LED B RED ② *I
39	R30		O	O(L)		CS LED C GRN ① *I
40	R31		O	O(L)		CS LED C GRN ② *I
41	R32		O	O(L)		CS LED C RED ① *I
42	R33		O	O(L)		CS LED C RED ② *I
43	R40		O	O(L)		Function LED L: ON H: OFF
44	R41		O	O(L)		NC (OPEN)
45	R42		—	O(L)		NC (Vcc)
46	R43		—	O(L)		NC (Vcc)
47	R50/Vdisp		I	I		NC (GND)
48	R51		I	I		NC (GND)
49	R52		I	I		NC (GND)
50	R53		I	I		NC (GND)
51	R60/COMP		O	I		DISPLAY CK
52	R61/Vref		O	I		DISPALY DT
53	R62/TOE1		O	I		NC (OPEN)
54	R63/TOE2		O	I		NC (OPEN)
55	R70/*INT0		I	I		SI INT (↘ Interruption)
56	R71/*INT1		I	I	PULL DOWN	PS (↗ Interruption)
57	R72/*INT2		I	I		ENCODERDT



# TM-742 A/742 E/942 A

## CIRCUIT DESCRIPTION

**HD404719A26H I/O PORT LIST**

PIN NO.	$\mu$ COM Port	Port name	I/O		Pull Up	Content
			PS ON	PS OFF		
58	R73/*INT <sub>3</sub>		I	I		ENCODERCK (↖ ↘ Interruption)
59	R80/*INT <sub>4</sub>		I	I		NC (GND)
60	R81/*INT <sub>5</sub>		I	I		NC (GND)
61	R82/SO <sub>1</sub>		O	O(H)		SO
62	R83/SI <sub>1</sub>		I	I		SI
63	R90/*SCK <sub>1</sub>		I	I		SCK
64	R91/*SCK <sub>2</sub>		I	I		NC (GND)
65	R92/SI <sub>2</sub>		I	I		NC (GND)
66	R93/SO <sub>2</sub>		I	I		NC (GND)
67	RA0/ICT <sub>0</sub>		O	O(H)		CLK OUT
68	RA1/ICT <sub>1</sub>		I	I		NC (GND)
69	RA2/TOG		I	I		NC (GND)
70	RA3/BUZZ		I	I		NC (GND)
71	RB0/TOC		I	I		NC (GND)
72	RB1/TOB		I	I		NC (GND)
73	AV <sub>cc</sub>					5 V (5 C)
74	RC0/AN0		I	I		VOL A
75	RC1/AN1		I	I		VOL B
76	RC2/AN2		I	I		VOL C
77	RC3/AN3		I	I		SQL A
78	RD0/AN4		I	I		SQL B
79	RD1/AN5		I	I		SQL C
80	RD2/AN6		I	I		B VOLTAGE

○: Pull-up with the hardware

\*: LOW active

\*1: DIMMER control of the various LED of CSEL is carried out means of 2 ports. The brightness is shown below.

Port	OFF	Dark	Bright
①	H	L	L
②	H	H	L

# TM-742 A/742 E/942 A

## CIRCUIT DESCRIPTION

LCD DRIVER (MSM5265) LIST  
DISPLAY UNIT (X54-3130-11): IC201 No. 1

IC Pin No.	IC Pin Name	LCD SEG.		LCD Term. No.
		COM1	COM2	
				COM1
				COM2
30	S80	Ⓐ INPHON	Ⓐ REMOTO	1
29	S79	Ⓐ ON	Ⓐ TIMER	2
28	S78	Ⓐ OFF	Ⓐ ALRM	3
27	S77	Ⓐ TOT	Ⓐ ABC	4
26	S76	Ⓐ MUTE	Ⓐ APO	5
				6
25	S75	Ⓐ S7	Ⓐ S5	7
24	S74	Ⓐ ON AIR	Ⓐ BUSY	8
23	S73	Ⓐ L	Ⓐ SI	9
22	S72	Ⓐ M	Ⓐ S2	10
21	S71	Ⓐ 1-5-9	Ⓐ S3	11
20	S70	Ⓐ S6	Ⓐ S4	12
19	S69		Ⓐ BELL	13
18	S68	Ⓐ <	Ⓐ ALT	14
17	S67		Ⓐ IGbc	15
16	S66	Ⓐ L-	Ⓐ R-	16
15	S65	Ⓐ 100Ma	Ⓐ 100Mf	17
14	S64	Ⓐ 100Md	Ⓐ 100Me	18
13	S63	Ⓐ 100Mc		19
12	S62	Ⓐ 100Mb	Ⓐ 100Mg	20
11	S61	Ⓐ CONT	Ⓐ PTT	21
10	S60	Ⓐ 10Ma	Ⓐ 10Mf	22
9	S59	Ⓐ 10Md	Ⓐ 10Me	23
8	S58	Ⓐ 10Mc		24
7	S57	Ⓐ 10Mb	Ⓐ 10 Mg	25
6	S56	Ⓐ >	Ⓐ +	26
5	S55	Ⓐ T	Ⓐ C CSS	27

No. 2

IC Pin No.	IC Pin Name	LCD SEG.		LCD Term. No.
		COM1	COM2	
4	S54	Ⓐ IMa	Ⓐ IMf	28
3	S53	Ⓐ IMd	Ⓐ IMe	29
2	S52	Ⓐ IMc	Ⓐ IMdp	30
1	S51	Ⓐ IMb	Ⓐ IMg	31
100	S50	Ⓐ DTSS	Ⓐ REV	32
99	S49	Ⓐ 100Ka	Ⓐ 100Kf	33
98	S48	Ⓐ 100Kd	Ⓐ 100Ke	34
97	S47	Ⓐ 100Kc		35
96	S46	Ⓐ CLKdp	Ⓐ 100Kdp	36
95	S45	Ⓐ 100Kb	Ⓐ 100Kg	37
94	S44	Ⓐ Burst1	Ⓐ Burst2	38
93	S43	Ⓐ 10Ka	Ⓐ 10Kf	39
92	S42	Ⓐ 10Kd	Ⓐ 10Ke	40
91	S41	Ⓐ 10Kc	Ⓐ 10Kdp	41
90	S40	Ⓐ 10Kb	Ⓐ 10Kg	42
89	S39	Ⓐ ☆	Ⓐ F	43
88	S38	Ⓐ 1Ka	Ⓐ 1Kf	44
87	S37	Ⓐ 1Kd	Ⓐ 1Ke	45
86	S36	Ⓐ 1Kc	Ⓐ 05 K	46
85	S35	Ⓐ 1Kb	Ⓐ 1Kg	47
84	S34	Ⓐ +U	Ⓐ CO	48
83	S33	Ⓐ MRHa	Ⓐ MRHf	49
82	S32	Ⓐ MRHd	Ⓐ MRHe	50
81	S31	Ⓐ MRHc	Ⓐ LOCK	51
80	S30	Ⓐ MRHb	Ⓐ MRHg	52
79	S29	Ⓐ MRLa	Ⓐ MRLf	53
78	S28	Ⓐ MRLd	Ⓐ MRLe	54
77	S27	Ⓐ MRLc		55
76	S26	Ⓐ MRLb	Ⓐ MRLg	56
				57

# TM-742 A/742 E/942 A

## CIRCUIT DESCRIPTION

**No. 3**

IC Pin No.	IC Pin Name	LCD SEG.		LCD Term.No.
		COM1	COM2	
75	S25	Ⓑ S7	Ⓑ S5	58
74	S24	Ⓑ ONAIR	Ⓑ BUSY	59
73	S23	Ⓑ L	Ⓑ SI	60
72	S22	Ⓑ M	Ⓑ S2	61
71	S21	Ⓑ 1-5-9	Ⓑ S3	62
70	S20	Ⓑ S6	Ⓑ S4	63
69	S19		Ⓑ BELL	64
68	S18	Ⓑ <	Ⓑ ALT	65
67	S17	Ⓑ IGa	Ⓑ IGf	66
66	S16	Ⓑ IGd	Ⓑ IGe	67
65	S15	Ⓑ IGc		68
64	S14	Ⓑ IGb	Ⓑ IGg	69
63	S13	Ⓑ L-	Ⓑ R-	70
62	S12	Ⓑ 100Ma	Ⓑ 100Mf	71
61	S11	Ⓑ 100Md	Ⓑ 100Me	72
60	S10	Ⓑ 100Mc		73
59	S9	Ⓑ 100Mb	Ⓑ 100Mg	74
58	S8	Ⓑ CONT	Ⓑ PTT	75
57	S7	Ⓑ 10Ma	Ⓑ 10Mf	76
56	S6	Ⓑ 10Md	Ⓑ 10Me	77
55	S5	Ⓑ 10Mc		78
54	S4	Ⓑ 10Mb	Ⓑ 10Mg	79
53	S3	Ⓑ >	Ⓑ +	80
52	S2	Ⓑ T	Ⓑ C CSs	81
51	S1	Ⓑ IMa	Ⓑ IMf	82
48	COM-A			
49	COM-B			

**DISPLAY UNIT (X54-3130-11): IC202 No. 1**

IC Pin No.	IC Pin Name	LCD SEG.		LCD Term.No.
		COM1	COM2	
				COM1
				COM2
30	S80	Ⓑ IMd	Ⓑ IMe	83
29	S79	Ⓑ IMc	Ⓑ IMdp	84
28	S78	Ⓑ IMb	Ⓑ IMg	85
27	S77	Ⓑ DTSS	Ⓑ REV	86
26	S76	Ⓑ 100Ka	Ⓑ 100Kf	87
25	S75	Ⓑ 100Kd	Ⓑ 100Ke	88
24	S74	Ⓑ 100Kc	Ⓑ 100Kdp	89
23	S73	Ⓑ CLKdp		90
22	S72	Ⓑ 100Kb	Ⓑ 100Kg	91
21	S71	Ⓑ Burst1	Ⓑ Burst2	92
20	S70	Ⓑ 10Ka	Ⓑ 10Kf	93
19	S69	Ⓑ 10Kd	Ⓑ 10Ke	94
18	S68	Ⓑ 10Kc	Ⓑ 10Kdp	95
17	S67	Ⓑ 10Kb	Ⓑ 10Kg	96
16	S66	Ⓑ ☆	Ⓑ F	97
15	S65	Ⓑ 1Ka	Ⓑ 1Kf	98
14	S64	Ⓑ 1Kd	Ⓑ 1Ke	99
13	S63	Ⓑ IKc	Ⓑ 05K	100
12	S62	Ⓑ 1Kb	Ⓑ 1Kg	101
11	S61	Ⓑ +U	Ⓑ CO	102
10	S60	Ⓑ MRHa	Ⓑ MRHf	103
9	S59	Ⓑ MRHd	Ⓑ MRHe	104
8	S58	Ⓑ MRHc	Ⓑ LOCK	105
7	S57	Ⓑ MRHb	Ⓑ MRHg	106
6	S56	Ⓑ MRLa	Ⓑ MRLf	107
5	S55	Ⓑ MRLd	Ⓑ MRLe	108

# TM-742 A/742 E/942 A

## CIRCUIT DESCRIPTION

DISPLAY UNIT (X54-3130-11): IC202 No. 2

IC Pin No.	IC Pin Name	LCD SEG.		LCD Term. No.
		COM1	COM2	
4	S54	ⓑ MRLc		109
3	S53	ⓑ MRLb	ⓑ MRLg	110
				111
2	S52	ⓒ S7	ⓒ S5	112
1	S51	ⓒ ONAIR	ⓒ BUSY	113
100	S50	ⓒ L	ⓒ S1	114
99	S49	ⓒ M	ⓒ S2	115
98	S48	ⓒ 1-5-9	ⓒ S3	116
97	S47	ⓒ S6	ⓒ S4	117
96	S46		ⓒ BELL	118
95	S45	ⓒ <	ⓒ ALT	119
94	S44		ⓒ 1Gbc	120
93	S43	ⓒ L-	ⓒ R-	121
92	S42	ⓒ 100Ma	ⓒ 100Mf	122
91	S41	ⓒ 100Md	ⓒ 100Me	123
90	S40	ⓒ 100Mc		124
89	S39	ⓒ 100Mb	ⓒ 100Mg	125
88	S38	ⓒ CONT	ⓒ PTT	126
87	S37	ⓒ 10Ma	ⓒ 10Mf	127
86	S36	ⓒ 10Md	ⓒ 10Me	128
85	S35	ⓒ 10Mc		129
84	S34	ⓒ 10Mb	ⓒ 10Mg	130
83	S33	ⓒ >	ⓒ +	131
82	S32	ⓒ T	ⓒ C CSS	132
81	S31	ⓒ 1Ma	ⓒ 1Mf	133
80	S30	ⓒ 1Md	ⓒ 1Me	134
79	S29	ⓒ 1Mc	ⓒ 1Mdp	135
78	S28	ⓒ 1Mb	ⓒ 1Mg	136
77	S27	ⓒ DTS	ⓒ REV	137
76	S26	ⓒ 100Ka	ⓒ 100Kf	138

No. 3

IC Pin No.	IC Pin Name	LCD SEG.		LCD Term. No.
		COM1	COM2	
75	S25	ⓒ 100Kb	ⓒ 100Ke	139
74	S24	ⓒ 100Kc	ⓒ 100Kdp	140
73	S23	ⓒ CLKdp		141
72	S22	ⓒ 100Kb	ⓒ 100Kg	142
71	S21	ⓒ Burst1	ⓒ Burst2	143
70	S20	ⓒ 10Ka	ⓒ 10Kf	144
69	S19	ⓒ 10Kd	ⓒ 10Ke	145
68	S18	ⓒ 10Kc	ⓒ 10Kdp	146
67	S17	ⓒ 10Kb	ⓒ 10Kg	147
66	S16	ⓒ ☆	ⓒ F	148
65	S15	ⓒ 1Ka	ⓒ 1Kf	149
64	S14	ⓒ 1Kd	ⓒ 1Ke	150
63	S13	ⓒ 1Kc	ⓒ 05K	151
62	S12	ⓒ 1Kb	ⓒ 1Kg	152
61	S11	ⓒ +U	ⓒ CO	153
60	S10	ⓒ MRHa	ⓒ MRHf	154
59	S9	ⓒ MRHd	ⓒ MRHe	155
58	S8	ⓒ MRHc	ⓒ LOCK	156
57	S7	ⓒ MRHb	ⓒ MRHg	157
56	S6	ⓒ MRLa	ⓒ MRLf	158
55	S5	ⓒ MRLd	ⓒ MRLe	159
54	S4	ⓒ MRLc		160
53	S3	ⓒ MRLb	ⓒ MRLg	161
52	S2			
51	S1			
48	COM-A			
49	COM-B			

## CIRCUIT DESCRIPTION

### • TONE OUTPUT

The TONE output is obtained by outputting, from CPU, the pulse corresponding to the preset tone, and by filtering it. (Figure 41)

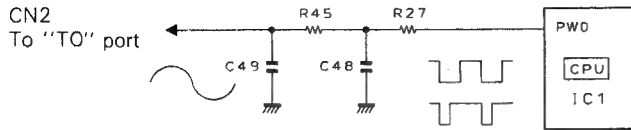


Fig. 41

### • INPUT/OUTPUT OF CTCSS (OPTION TSU-7)

Data to the CTCSS unit is outputted by P80, P47 and P43. Moreover, since P80 has also the function of checking the connection it becomes an input when the power is turned ON, and after checking the connection it becomes an output. CTCSS does not turn ON when there is no connection. Figure 42 shows the data transmission format, and Figure 44 shows the data configuration. The "L" level, obtained when the tone is detected from the CTCSS unit and its coincidence is confirmed, is entered in P81 of the microprocessor, and then the squelch is opened.

Each CTCSS unit is able to cope with 3 bands. This operation is executed by switching the low frequency signal outputted by the band unit. (Figure 43).




Fig. 42 CTCSS Data Transfer Format


LIST OF PORTS OF IC11: LC7385M

Pin No.	Name	I/O	Function description
1	IN <sup>+</sup>	I	Non-inverted input of the input amplifier
2	IN <sup>-</sup>	I	Inverted input of the input amplifier
3	GS	O	Output of the output amplifier
4	V <sub>REF</sub>	O	Reference voltage output of V <sub>DD</sub> /2
5	B/H	I	Selects the output format of Q1 to Q4. Binary (2 of 8) code when stuck at "H". Hexadecimal code when stuck at "L".
6	PD	I	Operation switched to power down mode when stuck at "H".
7	OSC1	I	An oscillator circuit is composed by connecting a 3 569545MHz quartz oscillator between these terminals.
8	OSC2	O	
9	V <sub>SS</sub>		Power supply terminal, normally 0V
10	TOE	I	Controls the 3 state output of Q1 to Q4. Enabled when stuck at "H". High impedance when stuck at "L".
11	Q1	O	3 state received data output
12	Q2		
13	Q3		
14	Q4		
15	SiD	O	Stuck at "H" when the connection time of the effective tone pair exceeds the preset time preset by the add-on CR.
16	ES1	O	Stuck at "H" when the effective tone pair is detected.
17	Si/UT	I/O	The guard time is preset by connecting CR.
18	V <sub>DD</sub>		Power supply terminal, Normally 5V.



IC108, 109 (BU4053 BF) Fig. 43

Tone frequency selection data of CTCSS FX365



Example 88.5 Hz (DTMF unit)

### • INPUT/OUTPUT OF DTMF

Data to DTMF is outputted by P66, 67 and P60 to P63 of the microprocessor.

P60 to P63 are the data in the case of the encoder, and tones corresponding to each data are outputted from the TONE terminal) of IC10 (TCD35219F) while P66 is stuck at "H".

As for the decoder, the detected signals corresponding to each band are switched at IC108, 109, in the same way as in CTCSS, and after that it passes through the analog switch IC8 and is entered in the DTMF decoder IC11 (LC7385M). When an effective tone is detected, the terminal STD is stuck at "H", and P67 of the microprocessor is enabled. As a result, data are entered in P60 to P63, and the coincidence with the preset DTSS codes is checked by the microcomputer.

On the other hand, the input from the DTMF microphone is read and controlled by switching the input of IC11 by means of Q7 and the microprocessor. The ports of IC11 are shown in the following table.

### • PLL data output

The PLL data is passed through I/O expander IC101 (CXD 1095Q) from the microcomputer and output to each band unit with EP, CK, and DT signals and three serial data items.

A PLL IC (M56760FP) is used in common with the 144 and 430 TX/RX units. Figure 45 shows the data configuration. Figure 46 and 47 shows the PLL data transfer format.


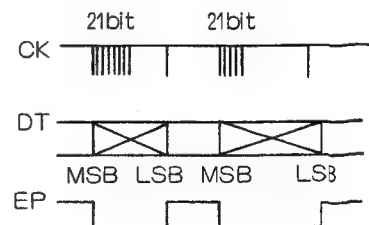


Fig. 45 PLL Data Configuration

# TM-742 A/742 E/942 A

## CIRCUIT DESCRIPTION

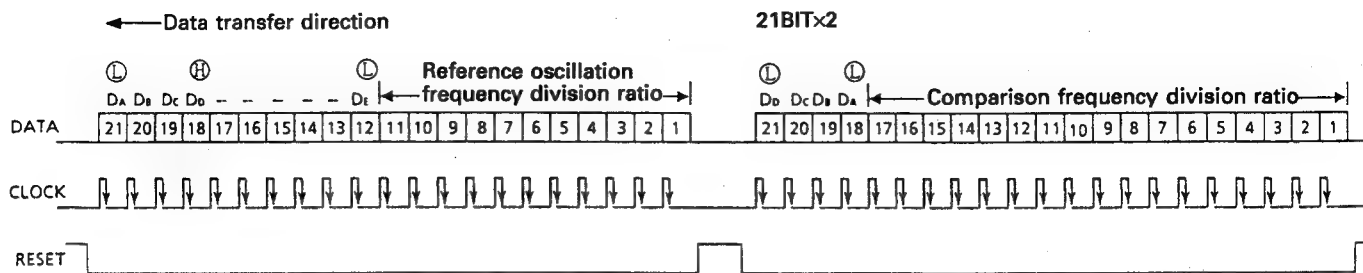

$$f_{REF} = 12800 + (8 \times \text{Reference oscillation frequency division ratio})$$

Reference oscillation frequency division ratio =  $16000 / f_{REF}$  (kHz)

5 kHz ..... P = 320  
6.25 kHz ..... P = 256

Reference oscillation frequency division ratio

1 2 3 4 5 6 7 8 9 10 11  
0 0 0 0 0 0 1 0 1 0 0 (320)  
0 0 0 0 0 0 0 0 1 0 0 (256)

17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1  
0 0 0 0 0 0 0 0 1 0 1 0 0 0 0 0 0 01 40 5 kHz  
0 0 0 0 0 0 0 0 1 0 0 0 0 0 0 0 0 0 01 00 5.25 kHz

### Special bit function

Bit	Name	H	L
D <sub>A</sub>	Data latch selection	Reference	Comparison
D <sub>B</sub>	SW2	H: OFF	L: ON
D <sub>C</sub>	SW1	H: OFF	L: ON
D <sub>D</sub>	POWER switch	OFF	ON
D <sub>E</sub>	Test	Test	Normal

### PLL data-to-bit relationship

ADD	BIT			
	0	1	2	3
1BH	1	2	3	4
1CH	5	6	7	8
1DH	9	10	11	12
1BH	13	14	15	16
1FH	17	-	-	-

Fig. 46 M56760 PLL DATA

1F	1E	1D	1C	1B	1A
-	6	10	14	18	1
-	7	11	15	19	2
-	8	12	16	20	3
5	9	13	17	21	4

1F	1E	1D	1C	1B	1A
-	x	D <sub>E</sub>	2 <sup>7</sup>	2 <sup>3</sup>	D <sub>D</sub>
-	x	2 <sup>10</sup>	2 <sup>6</sup>	2 <sup>2</sup>	D <sub>C</sub>
-	x	2 <sup>9</sup>	2 <sup>5</sup>	2 <sup>1</sup>	D <sub>B</sub>
x	x	2 <sup>8</sup>	2 <sup>4</sup>	2 <sup>0</sup>	D <sub>A</sub>

For comparison frequency

Data	State
D <sub>E</sub>	Normal
L	Normal
H	Test

Data	PLL
D <sub>E</sub>	POWER switch
L	ON
H	OFF

1F	1E	1D	1C	1B	1A
-	2 <sup>15</sup>	2 <sup>11</sup>	2 <sup>7</sup>	2 <sup>3</sup>	D <sub>D</sub>
-	2 <sup>14</sup>	2 <sup>10</sup>	2 <sup>6</sup>	2 <sup>2</sup>	D <sub>C</sub>
-	2 <sup>13</sup>	2 <sup>9</sup>	2 <sup>5</sup>	2 <sup>1</sup>	D <sub>B</sub>
2 <sup>16</sup>	2 <sup>12</sup>	2 <sup>8</sup>	2 <sup>4</sup>	2 <sup>0</sup>	D <sub>A</sub>

For frequency division ratio setting

Data		Output port	
D <sub>H</sub>	D <sub>C</sub>	SW2	SW1
L	L	ON	ON
H	L	OFF	ON
L	H	ON	OFF
H	H	OFF	OFF

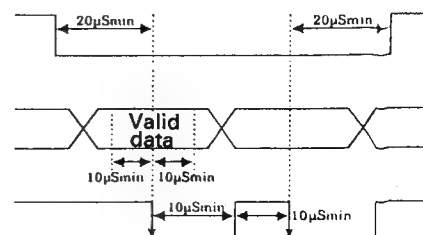
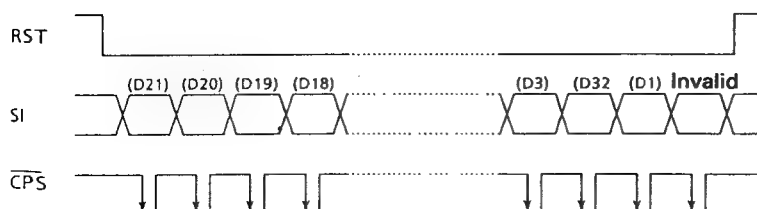


Fig. 47 M56760 PLL DATA OUTPUT

# TM-742 A/742 E/942 A

## CIRCUIT DESCRIPTION

The PLL and reference frequency-division ratio data input to the 1200 TX/RX unit are output from P21 (CK), P22 (DT), and P23 (EP1) of the CPU. The reference frequency-division ratio data (R) is output only when the power is switched on and when 10 and 12.5 kHz reference frequencies are changed.

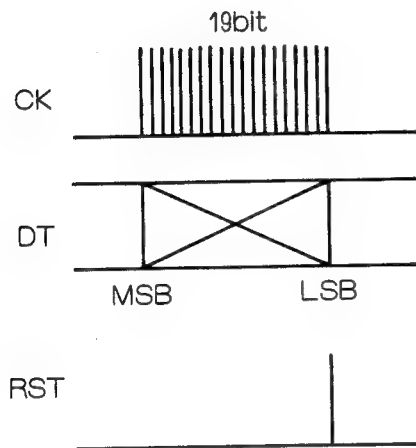


Fig. 48 PLL Frequency-Division Ratio Data Transfer Format

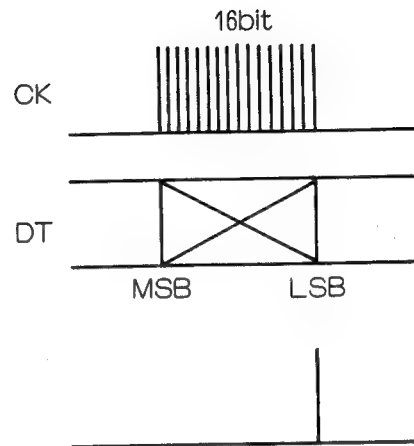


Fig. 49 Reference Frequency-Division Ratio Data Transfer Format

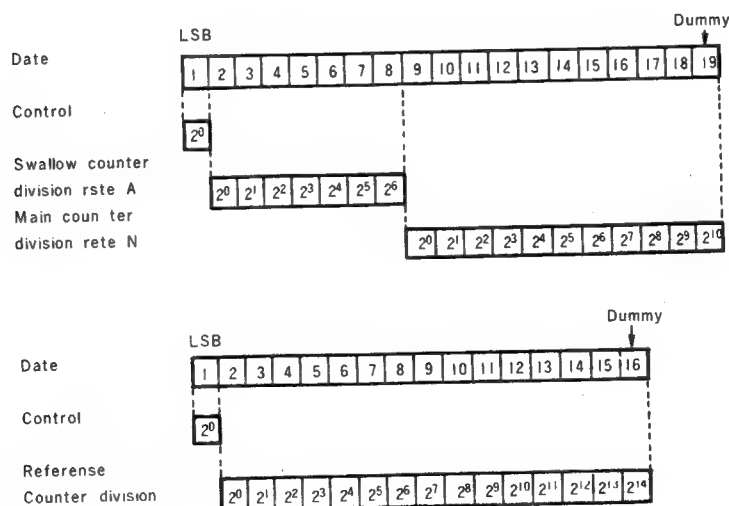


Fig. 50 Data Configuration

# TM-742 A/742 E/942 A

## CIRCUIT DESCRIPTION

### AF SIGNAL SYSTEM

#### • OUTLINE

Signals coming from the detected signal RA of each band unit pass through the electronic potentiometer, are added at the mute circuit and buzzer circuit, and after passing through the speaker switching circuit they are outputted to the power amplifier and to the speakers.

Each band has an independent AF signal, and any arbitrary combination can be outputted through the speaker, depending on the position where the speaker jack is plugged.

#### • VOLUME/BUZZER CIRCUIT

The angles of the potentiometers of the various bands, that are located on the panel unit, are transformed to 5 bit data through A/D conversion executed by the microprocessor of the panel unit, and are sent to the microprocessor of the control unit. These data are outputted by the I/O expander: IC101 to IC112(HIC) as serial data.

The buzzer sound heard when the key is pressed is outputted from the IC(P44) of the control unit, MIXed with the DTMF monitor output, and is outputted to IC112.

IC112 carries out the LEVEL/MUTE processing of the audio signal in conformity with the received data, and after that the signal is outputted to the speaker changeover switch: IC106. (Figure 51).

The volume level is set for the speaker output and buzzer sound ("beep" sound) of each band, by using the 2 electronic potentiometers (MB87032) built into IC112.

The data have 28 bit composition, with 20 bits used to set the level. (The remaining 8 bits are used as commands and other applications).

The data are fetched at the trailing edge of the clock. (Figure 52).

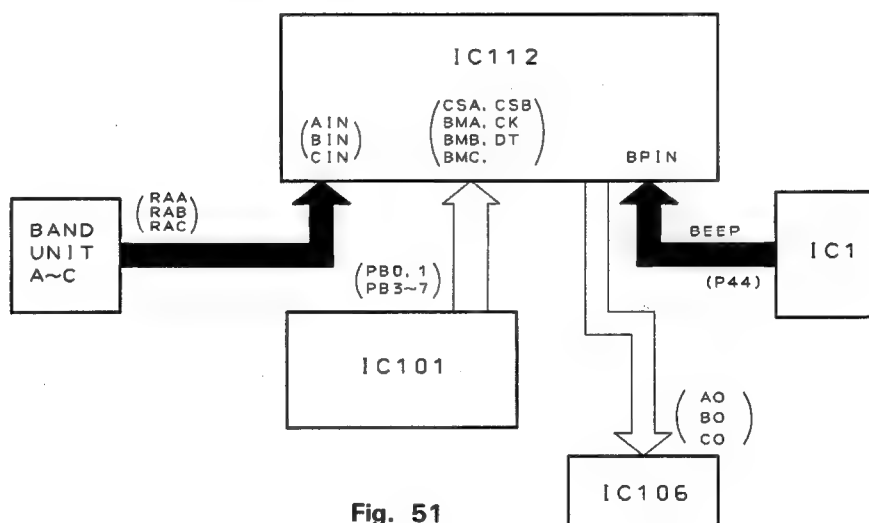


Fig. 51

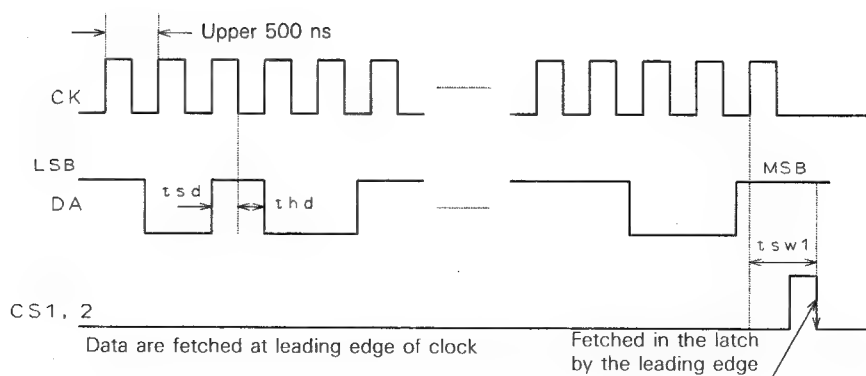


Fig. 52



# TM-742 A/742 E/942 A

## CIRCUIT DESCRIPTION

### • SPEAKER SWITCHING CIRCUIT

Four speaker jacks are provided in total, one in each band unit (rear) and one in the control unit (side).

As for the functions of the various terminals, the speaker jack of the band unit outputs the AF signal of the band in question when the speaker is connected.

The speaker jack of the control unit outputs the signal obtained by mixing the remaining AF signals. This signal is outputted by the internal speaker when there is no speaker connected to the speaker jack, Figure 53 shows the main circuit.

When there is nothing connected to the speaker jack, the signal is entered in the adder of IC103. The level of the adder does not change, irrespective of the number of signals (1 to 3) that are added.

For example, when one wants to mix the signals of speakers A and C of band B and to output the obtained result from the remaining speaker, it is possible to execute this operation by connecting with the jack of band B and the jack of the control unit.

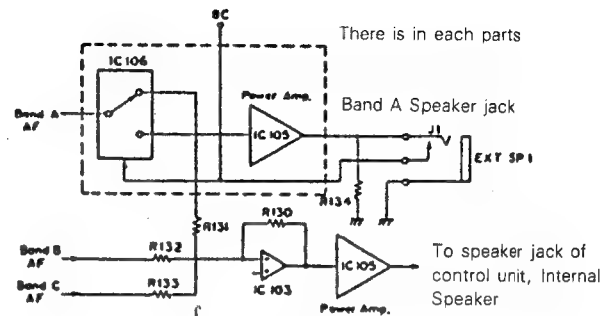


Fig. 53

### • SQUELCH CIRCUIT

Squelch can be preset at each band by means of the squelch potentiometer located in the panel unit. The squelch potentiometer signal is converted to 5 bit data through A/D conversion at the microprocessor of the panel unit.

Data are sent from the panel unit to the microprocessor of the control unit, and after data conversion they are sent as serial data from IC101 of the control unit to IC113 (HIC). (Refer to the SHIFT REGISTER section for the logic). D/A conversion is carried out at IC113 through the combination of the shift register and the analog switch, and the control voltage of IC110 is generated by the RDSQ terminal to carry out the control of the RD line. (Figure 54).

The setting of the squelch level turns the analog switch ON/OFF by means of the 5 bit data of the various bands (Refer to the LIST OF PORTS of the shift registers A and B).

Since a resistance is connected between the two terminals of the analog switch, the resistance value is changed by the combination of the ON/OFF states of the switches. The voltage level of the SQ output can be controlled as a result. (Figure 55)

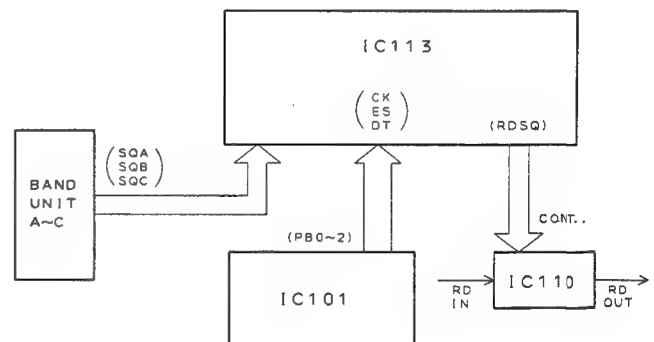


Fig. 54

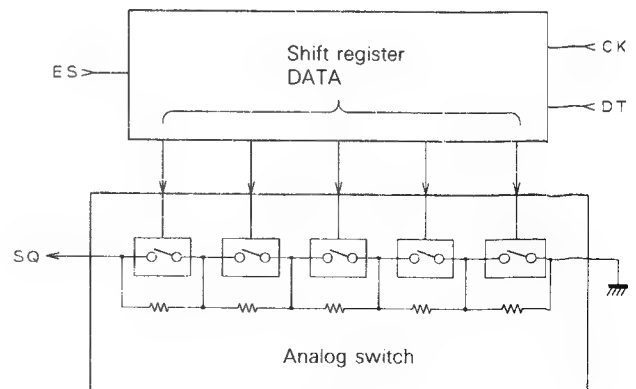


Fig. 55

# TM-742 A/742 E/942 A

## CIRCUIT DESCRIPTION

### Connector Connecting the Band Unit and Control Unit

#### ● Outline

The pin assignments of the connector that connects the control unit and band unit are common in three

bands. The band unit is also used to check which band unit is connected.

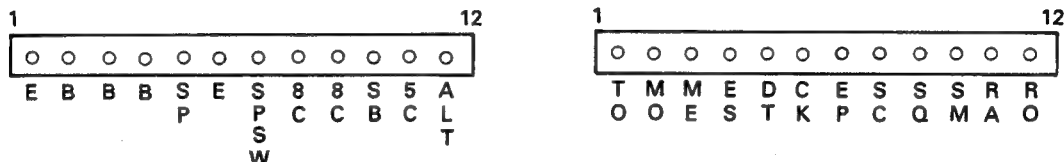


Fig. 56 Connector Connecting the Band Unit and Control Unit

Pin No.	Name	Function	Pin No.	Name	Function
1	E	GND	1	TO	67.0 to 250.3 Hz subtone output
2	B	13.8 V input	2	MO	Audio signal from microphone (including DTMF)
3	B		3	ME	Microphone ground
4	B		4	ES	Shift-register enable output
5	SP	AF signal is output when speaker jack is connected.	5	CK	Shift-register PLL clock
6	E	GND	6	DT	Shift-register PLL data
7	SPSW	Speaker jack connection and detection. "H" during connection.	7	EP	PLL enable
8	8C	8 V is output during the power-on sequence.	8	SC	"L" when squelch input is busy.
9	8C		9	SQ	50 k ohms when squelch D/A output is tight.
10	SB	13.8 V is output during the power-on sequence.	10	SM	Signal-strength meter voltage input
11	SC	5 V is output during the power-on sequence.	11	RA	Detection input (squelch circuit)
12	ALT	ALT voltage input	12	RD	Detection input (no squelch circuit)

Table 20 Pin functions (as viewed from the control unit)

#### ● Band retrieval

Each band is retrieved through the EP, CK, and DT pins. Data is input for retrieval when the power is switched on and when the memory is cleared. Data is then output again.

The control unit is pulled down as shown in Figure 57. Therefore, the DT, CK, and EP pins are set low when no band unit is connected. Pins set high as listed in Table 21 are pulled up when any band unit is connected. The type of connected band unit is then judged.

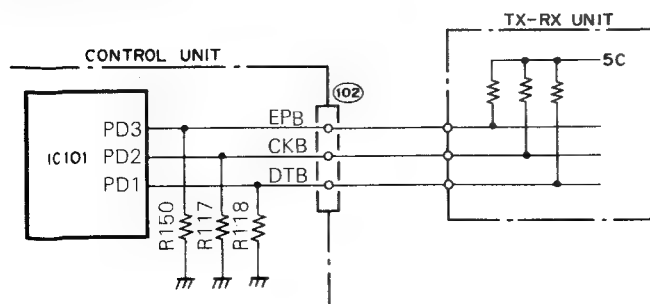


Fig. 57 Retrieval System

BAND Unit	DT	CK	EP
No Unit	L	L	L
28	H	L	L
50	H	H	L
144	L	H	H
430	H	L	H
1200	L	L	H




Table 21 Band Retrieval

# TM-742 A/742 E/942 A

## DESCRIPTION OF COMPONENTS

### CONTROL UNIT (X53-346X-XX)

No. 1

Device number	Use, function	Operation, condition, interchangeability
IC1	Microprocessor	Refer to circuit description
IC2	SRAM memory	
IC3	6VAVR	3 terminal regulator 
IC4	Address decoder	For chip selector (I/O expander)
IC5	Address decoder	For chip selector (SRAM)
IC6	Serial time clock	Refer to circuit description
IC7	Parallel → Serial converter IC	Refer to circuit description
IC8	Analog switch	For DTHF receiver
IC9	Low frequency amplifier-adder	Mic. amplifier DTMF modulation system adder
IC10	DTMF encoder	Refer to the circuit description
IC11	DTMF decoder	Refer to the circuit description
IC12	Reset IC	
IC13, 14	Serial data inverter buffer	For serial data 
IC15	Analog switch	For switching during backup, (RD, WR)
IC16	Analog switch	For switching during backup (CK)
IC101	I/O expander	Refer to the circuit description
IC102	8V AVR	3 terminal regulator 
IC103	Adder	For internal speaker. For level compensation
IC104, 105	Low frequency amplification	① Input (IC104-Band B, IC105-Common) ⑥ Output (IC104-Band B, IC105-Common) ⑦ 13.8V    ④, ⑩, ⑫, GND ⑧ Output (IC104-Band C, IC105-Band A) ⑬ Input (IC104-Band C, IC105-Band A)

# TM-742 A/742 E/942 A

## DESCRIPTION OF COMPONENTS

### CONTROL UNIT (X53-346X-XX)

No. 2

Device number	Use, function	Operation, condition, interchangeability
IC106	Analog switch for speaker switching	④ Band C AF input                      ⑭ Band A AF input ⑮ Band B AF input ② Band B internal SP output,      ⑤ Band C external SP output ⑫ Band A internal SP output ① Band B external SP output,      ③ Band C external SP output ⑬ Band A external SP output ⑪ Band A switching input          ⑩ Band B switching input ⑨ Band C switching input ⑨ to ⑪ Internal SP when stuck at "L"
IC108, 109	Analog switch	For CTCSS, DTSS, RD switching. (Refer to the circuit description)
IC110	Analog switch	For RD switching
IC112	HIC for electronic potentiometer	Refer to the circuit description
IC113	HIC for SQ	Refer to the circuit description
IC114	HIC for dimmer	Refer to the circuit description
Q1	Low frequency amplification	Mic. amplifier
Q2	Buffer amplifier	For mic. RD
Q3	For mic. line muting	Mic. muting during ON (During DTMF signal transmission)
Q4	5C switch	Switch for 5C line
Q5	Switch	For RESET
Q6, 9	Switch	Power detection circuit, for backup
Q7	Switch	For and dual and single tone switching of the DTMF signal
Q8	Mute switch	
Q10	Buffer amplifier	For DTMF
Q11	Switch	For controlling IC15-16 during backup
Q101, 102	SB system power switch	Q101, 102 are ON when power is ON, Q101, 102 are OFF when power is OFF
Q103, 104	Mute switch	Q103 instantaneously ON when POWER ON, Q104 instantaneously ON when POWER OFF.
Q105	Fan motor switch	Fan operates when switch is ON, fan does not operate when switch is OFF
Q106	Reset switch	For I/O expander resetting

# TM-742 A/742 E/942 A

## DESCRIPTION OF COMPONENTS


### CONTROL UNIT (X53-346X-XX)

No. 3

Device number	Use, function	Operation, condition, interchangeability
IC107, 108, 109	Mute switch	Q107 for band C, Q108 for band A, Q109 for band B
D1	Back flow prevention, lithium battery switching	Lithium battery OFF when power supply is connected.
D2	Voltage compensation	
D3	Back flow prevention	
D4	Surge protection	
D5	Reset detection	
D6	Back flow prevention	

### DISPLAY UNIT (X54-3130-11)

No. 1

Device number	Use, function	Operation, condition, interchangeability
IC1	Microprocessor	Refer to circuit description
IC2	5V AVR, reset	
IC3, 4, 5, 6, 203, 206	Serial data inverter buffer	
IC201, 202	LCD driver	
IC204	Flip-flop	Enable generation circuit
IC205	5V AVR	For LCD driver, flip-flop, inverter
Q1	5V power switch	ON when Q3 is ON
Q2	5V power switch	ON when Q4 is ON
Q3	5V power switch	Turned ON by port DO of microcomputr when PS ON
Q4	5V power switch	ON when Q1 is ON
Q5	Reset switch	
Q101	LED switch for function	ON during function
D1	Back-flow prevention	
D2	Back-flow prevention	Prevention of back-flow when common terminal is connected by mistake with CN3.
D3, 4	LED for illumination	Green
D101,102,103 104, 105	LED for function	Red
D107,108,109, 110 111,112, 114	LED for illumination	Yellow

# TM-742 A/742 E/942 A

## DESCRIPTION OF COMPONENTS



28TX-RX unit (X57-3790-01): UT-28S(M)

No. 1

Component	Use/Function	Operation/Condition/Compatibility
IC1	Shift register	See Circuit Description.
IC2	VCO, PLL	
IC3	Low-frequency amplifier, limiter	Microphone amplifier
IC4	28-MHz band transmission Drive	Operation during transmission 28 - 29.695 MHz ① Input ⑭ Output
IC5	APC	
IC6	Second local oscillator, mixer IF amplifier, detector Low-frequency amplifier Noise detector Squelch switch	① First IF input 8.83 MHz ③ Second local oscillator input 9.285 MHz ⑨ Squelch output, busy signal, 0 V while busy ⑩ Noise detection voltage output (DC) ⑪ Signal-strength meter output ⑫ Detection output ⑭ RD output ⑮ AF OUT
IC7	9V AVR	
IC8	Out-of-band reception Mixer, RF amplifier	① HET input 2 IF output ③ 8 V (8 V outside band; 0 V within band) ⑤ RF output ⑥ 8 V (8 V within band; 0 V outside band) ⑧ RF input
Q1	High-frequency amplifier	Operation during reception, 28-MHz band
Q2	First mixer	Operation during reception
Q3	First IF amplifier	Operation during reception 8.83 MHz
Q4	ATT switch	ON when ATT is ON
Q5	First mixer selection switch	OFF during out-of-band reception

## DESCRIPTION OF COMPONENTS

No. 2

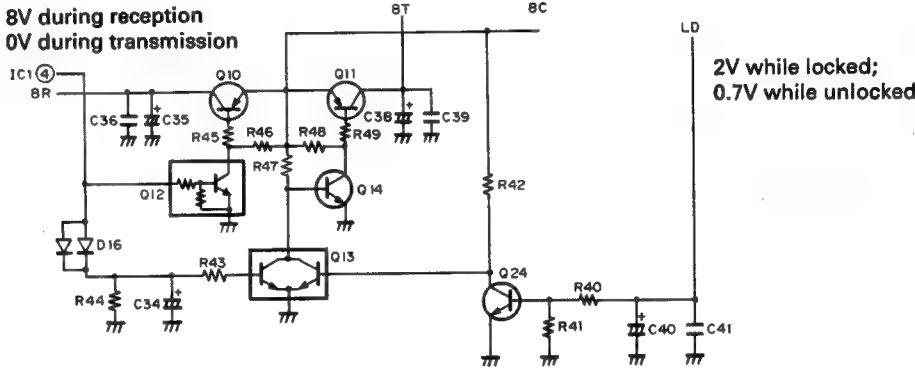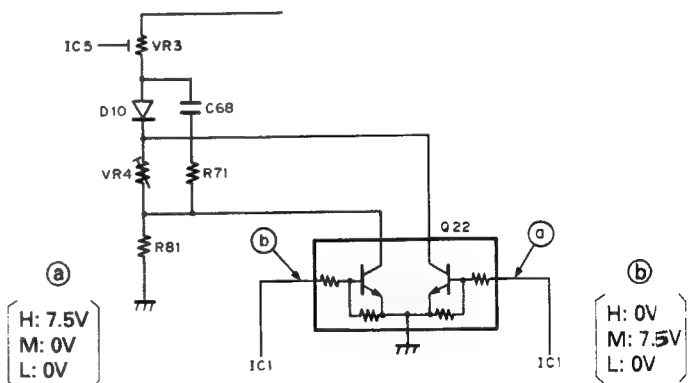Component	Use/Function	Operation/Condition/Compatibility
Q6~7	In-band/out-of-band power switch	Q6 OFF, Q7 ON: In-band reception; Q6 ON, Q7 OFF: Out-of-band reception
Q8	Second local oscillator buffer	Operation during reception 9.285 MHz
Q9	Squelch hysteresis switch	ON while busy
Q10~Q14 Q24	Transmit/receive power switch	 <p>8V during reception 0V during transmission</p> <p>2V while locked; 0.7V while unlocked</p> <p>Q10, Q12, Q13 OFF, Q11, Q14, Q24 ON: During transmission. Q10, Q12, Q13, Q24 ON, Q11, Q14 OFF: During reception</p>
Q15~17	Inverter	
Q18	Modulation system mute	ON during reception
Q19	CV line buffer	
Q20	HET output amplifier	28-29.695 MHz: During transmission; 36.83-38.525 MHz: During reception
Q21	VCO 8V ripple filter	
Q22	Middle (not for 10 W), LOW Power switch	 <p>H: 7.5V M: 0V L: 0V</p> <p>H: 0V M: 7.5V L: 0V</p>
Q23	APC control	Operation during transmission
Q25~Q26	AM/FM selection switch	Q25 and Q26 OFF: During FM reception Q25 and Q26 ON: During AM reception

# TM-742 A/742 E/942 A

## DESCRIPTION OF COMPONENTS

No. 3

Component	Use/Function	Operation/Condition/Compatibility
Q27	Transmission band selection switch	ON: Narrow OFF: Wide
D1 ~ D2	ATT selection switch	D1 OFF and D2 ON: When ATT ON D1 ON and D2 OFF: When ATT OFF
D3 ~ D6	Varicap tuner	
D7	HET selection switch	
D8	Reverse-flow prevention	
D9	HET selection switch	
D10	Temperature compensation	APC
D11, D12	Antenna transmit/receive switch	ON: Transmit; OFF: Receive
D13, D14	Power detection	APC
D15	Reverse-power connection prevention	
D16	Reverse-flow prevention	
D17	Temperature compensation	



## DESCRIPTION OF COMPONENTS

50 TX-RX Unit (X57-3800-01):UT-50S(M)



No. 1

Component	Use/Function	Operation/Condition/Compatibility
IC1	Shift register	See Circuit Description.
IC2	VCO, PLL	
IC3	Low-frequency amplifier, limiter	Microphone amplifier
IC4	50 MHz band transmission Drive	Operation during transmission 50 - 53.995 MHz ① Input ② Output
IC5	APC	
IC6	Second local oscillator, mixer IF amplifier, detector Low-frequency amplifier Noise detector Squelch switch	① First IF input 10.595 MHz ③ Second local oscillator input 11.05 MHz ⑨ Squelch output, busy signal, 0 V while busy ⑩ Noise detection voltage output (DC) ⑪ Signal-strength meter output ⑫ Detection output ⑭ RD output ⑮ AF OUT
IC7	9V AVR	
IC8	Out-of-band reception	① HET input 2 IF output ③ 8 V (8 V outside band; 0 V within band)
	Mixer, RF amplifier	⑤ RF output ⑥ 8 V (8 V within band; 0 V outside band) ⑧ RF input
Q1	High-frequency amplifier	Operation during reception, 50 MHz band
Q2	First mixer	Operation during reception
Q3	First IF amplifier	Operation during reception 10.595 MHz
Q4	ATT switch	ON when ATT is ON
Q5	First mixer selection switch	OFF during out-of-band reception

# TM-742 A/742 E/942 A

## DESCRIPTION OF COMPONENTS

No. 2

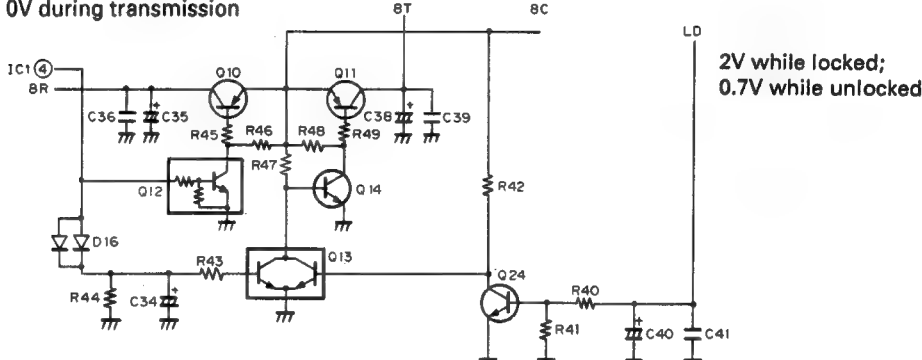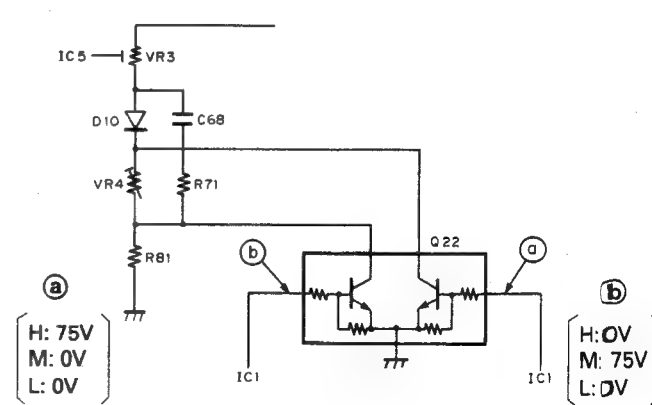Component	Use/Function	Operation/Condition/Compatibility
Q6~7	In-band/out-of-band power switch	Q6 OFF, Q7 ON: In-band reception; Q6 ON, Q7 OFF: Out-of-band reception
Q8	Second local oscillator buffer	Operation during reception 11.05 MHz
Q9	Squelch hysteresis switch	ON while busy
Q10~Q14 Q24	Transmit/receive power switch  8V during reception: 0V during transmission    Q10, Q12, Q13 OFF, Q11, Q14, Q24 ON: During transmission Q10, Q12, Q13, Q24 ON, Q11, Q14 OFF: During reception	
Q15~17	Inverter	
Q18	Modulation system mute	ON during reception
Q19	CV line buffer	
Q20	HET output amplifier	50 - 53.995 MHz: During transmission; 60.595 - 64.590 MHz: During reception
Q21	VCO 8V ripple filter	
Q22	Middle (not for 10 W), LOW Power switch	
Q23	APC control	Operation during transmission
Q25~Q26	AM/FM selection switch	Q25 and Q26 OFF: During FM reception Q25 and Q26 ON: During AM reception

## DESCRIPTION OF COMPONENTS

No. 3



Component	Use/Function	Operation/Condition/Compatibility
D1 ~D2	ATT selection switch	D1 OFF and D2 ON: When ATT ON D1 ON and D2 OFF: When ATT OFF
D3~D6	Varicap tuner	
D7	HET selection switch	
D8	Reverse-flow prevention	
D9	HET selection switch	
D10	Temperature compensation	
D11, D12	Antenna transmit/receive switch	APC
D13, D14	Power detection	ON: Transmit; OFF: Receive
D15	Reverse-power connection prevention	APC
D16	Reverse-flow prevention	
D17	Temperature compensation	

# TM-742 A/742 E/942 A

## DESCRIPTION OF COMPONENTS



144TX-RX Unit (X57-3580-XX)

No. 1

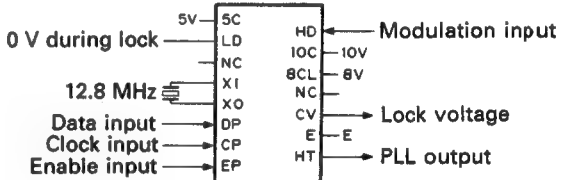Reference No.	Function	Description
IC1	Shift register	See the circuit description.
IC2	10V AVR	
IC5	Second local oscillation, mixer, IF amplification, detection, low-frequency amplification, noise amplification, noise detection, and squelch switching	① 10.7 MHz first IF input ③, ④ 10.245 MHz second local oscillation ⑨ 0 V when scan control and busy signals are busy. ⑩ Noise detection voltage output (DC) ⑪ Signal-strength meter output ⑫ Detection output ⑭ RD output ⑮ AF output
IC7	Low-frequency amplification and limiter	Microphone amplifier
IC8	144 MHz band transmission driver	Operation during transmission. 144 to 148 MHz band ⑭ Input ① Output
IC9	APC	
IC10	Power module	
IC11	VCO.PLL	
Q1	High-frequency amplification	Operation during reception. 144 MHz band
Q2	First mixer	Operation during reception
Q3	First IF amplification	Operation during reception. 10.7 MHz

## DESCRIPTION OF COMPONENTS

No. 2

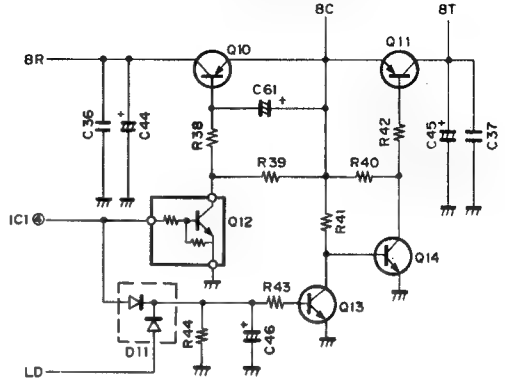
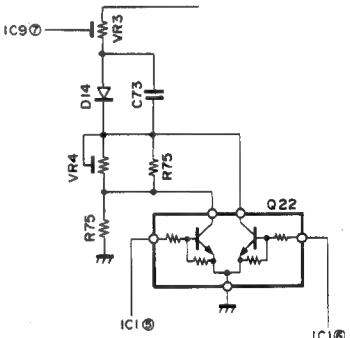
Reference No.	Function	Description
Q10 ~ Q14	Transmission and reception power selection	 <p>(0 V during lock)</p> <p>( Q10, Q12, and Q13 are set "OFF" during transmission. Q11 and Q14 are set "ON" during transmission. Q10, Q12, and Q13 are set "ON" during reception. Q11 and Q14 are set "OFF" during reception. )</p>
Q15, Q16, Q17	Inverter	
Q18	Modulation muting	ON during reception
Q19	CV line buffer	144 MHz band
Q20	PLL output amplification	
Q21	PLL 8 V ripple filter	
Q22	Middle/low POWER switch	 <p>Middle and low POWER switches are set ON when high.</p>
Q23	APC control	Operation during transmission
Q24	Squelch hysteresis switch	OFF when busy
D1 ~ D7	Varicap diode tuning	
D11	Antireverse current	
D12	Antireverse current	
D13	PLL output switch	
D14	Temperature compensation	APC
D15, D16	Antenna transmission and reception selection	ON during transmission. OFF during reception.
D17, D18	Power detection	APC
D19	Power reverse connection protection	

# TM-742 A/742 E/942 A

## DESCRIPTION OF COMPONENTS



### 220 TX-RX Unit (X57-3810-10): UT-220S(K)

No. 1

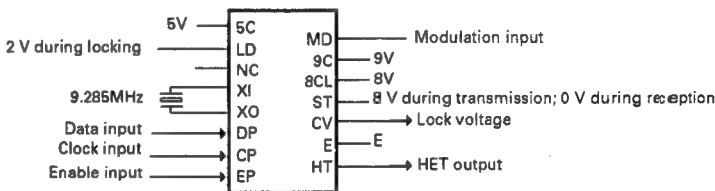Component	Use/Function	Operation/Condition/Compatibility
IC1	Shift register	See Circuit Description.
IC2	9V AVR	
IC5	Second local oscillator, mixer IF amplifier, detector Low-frequency amplifier Noise detector Squelch switch	① First IF input 30.825 MHz ③ ④ Second local oscillator 30.37 MHz ⑨ Squelch output, busy signal, 0 V while busy ⑩ Noise detection voltage output (DC) ⑪ Signal-strength meter output ⑭ RD output ⑮ AF OUT
IC7	Low-frequency amplifier, limiter	Microphone amplifier
IC8	220-MHz band transmission Drive	Operation during transmission 220 - 224.995 MHz ① Input ② Output
IC9	APC	
IC10	Power module	
IC11	VCO, PLL	
Q1	High-frequency amplifier	Operation during reception, 220 MHz band
Q2	First mixer	Operation during reception
Q3	First IF amplifier	Operation during reception 30.825 MHz

## DESCRIPTION OF COMPONENTS

No. 2

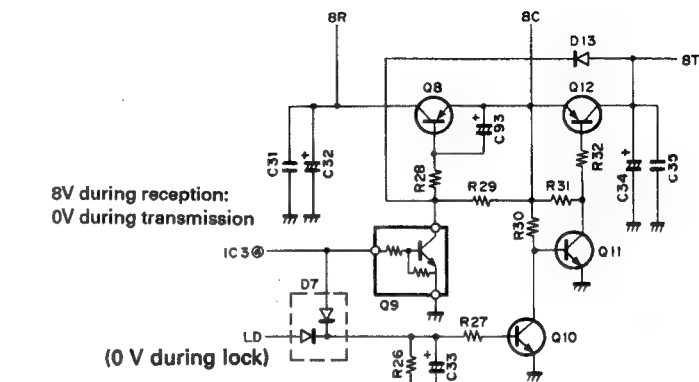
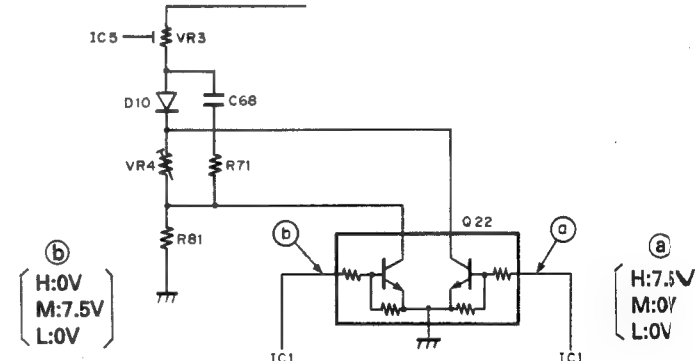
Component	Use/Function	Operation/Condition/Compatibility
Q10~Q14	Transmit/receive power switch	 <p>8V during reception: 0V during transmission</p> <p>(0 V during lock)</p> <p>Q10, Q12, Q13 OFF, Q11, Q14 ON: During transmission Q10, Q12, Q13, ON, Q11, Q14 OFF: During reception</p>
Q15~Q17	Inverter	
Q18	Modulation system mute	ON during reception
Q19	CV line buffer	
Q20	HET output amplifier	220 - 224.995 MHz: During transmission: 189.175 - 194.17 MHz: During reception
Q21	VCO 8V ripple filter	 <p>H:0V M:7.5V L:0V</p> <p>H:7.5V M:0V L:0V</p>
Q22	Middle/low power switch	
Q23	APC control	Operation during transmission
Q24	Squelch hysteresis switch	ON while busy
D3, 5, 7, 20	Varicap tuner	
D11, 12	Reverse-flow prevention	
D13	HET selection switch	
D14	Temperature compensation	APC
D15, 16	Antenna transmit/receive switch	ON: Transmit; OFF: Receive
D17, 18	Power detection	
D19	Reverse-power connection prevention	

# TM-742 A/742 E/942 A

## DESCRIPTION OF COMPONENTS

430 TX-RX Unit (X57-3590-XX)


No. 1

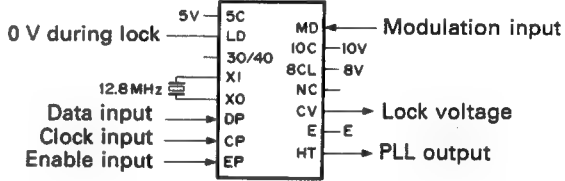
Reference No.	Function	Description
IC1	Second local oscillation, mixer, IF amplification, detection, low-frequency amplification, noise amplification, noise detection, and squelch switching	① 21.6 MHz first IF input ③, ④ 21.145 MHz second local oscillation ⑨ 0 V when scan control and busy signals are busy. ⑩ Noise detection voltage output (DC) ⑪ Signal-strength meter output ⑭ RD output ⑮ AF output ⑫ Detection output
IC2	Low-frequency amplification and limiter	Microphone amplifier
IC3	Shift register	See the circuit description.
IC4	10V AVR	
IC5	APC	
IC6	430 MHz band transmission driver	① Output ⑮ Input
IC7	Power module	
IC10	VCO.PLL	
Q1, Q2	High-frequency amplification	Operation during reception
Q3	First mixer	Operation during reception
Q5	First IF amplification	Operation during reception. 21.6 MHz



## DESCRIPTION OF COMPONENTS

No. 2

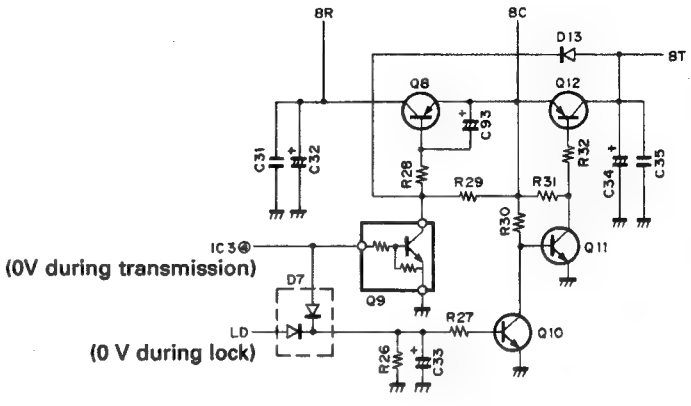Reference No.	Function	Description
Q8~Q12	Transmission/reception power selection	 <p>(0V during transmission)</p> <p>(0 V during lock)</p> <p>Q8, Q9, and Q10 are set "OFF" during transmission. Q11 and Q12 are set "ON" during transmission. Q8, Q9, and Q10 are set "ON" during reception. Q11 and Q12 are set "OFF" during reception.</p>
Q13, Q14, Q15	Inverter	
Q16	Modulation muting	ON during reception
Q17	PLL B V ripple filter	
Q18	PLL output amplification	
Q19	Middle/low POWER switch	Middle and low POWER switches are ON when high.
Q20	APC control	Operation during transmission
Q21	Squelch hysteresis switch	OFF when busy
D1	Antenna switch	OFF during reception
D4	PLL output switch	
D5	Temperature compensation	APC
D6, D7	Antireverse current	
D8, D9	Antenna transmission/reception selection	ON during transmission
D10,D11	Power detection	APC
D12	Power reverse connection protection	
D13	Antireverse current	8T pulse rise is faster during transmission and reception.
D14	IF level limiter	



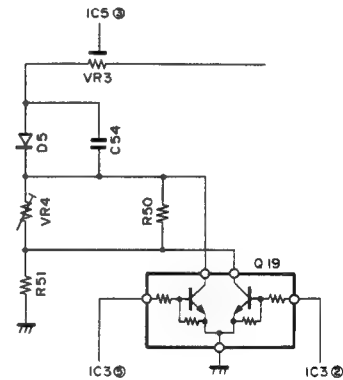


# TM-742 A/742 E/942 A

## DESCRIPTION OF COMPONENTS


1200TX-RX Unit (X57-3600-11): TM-942A, UT-1200 (M)

No. 1

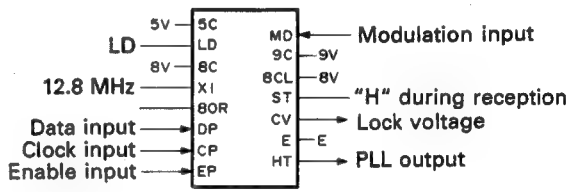Reference No.	Function	Description
IC2	Second local oscillation, mixer, IF amplification, detection, low-frequency amplification, noise amplification, noise detection, and squelch switching	① 59.7 MHz first IF input ③ ④ 59.245 MHz second local oscillation ⑨ 0 V when scan control and busy signals are busy. ⑩ Noise detection voltage output (DC) ⑪ Signal-strength meter output    ⑫ Detection output ⑭ RD output                      ⑮ AF output
IC3	ALT	② 8 V    ③ "H" during ALT    ⑩ Detection input (DC)
IC4	Low-frequency amplification and limiter	Microphone amplifier
IC5	Shift register	See the circuit description.
IC6	9V AVR	
IC7	Predrive	⑩ Input    ① Output
IC8	Drive	① Output    ⑧ Input
IC9	APC	
IC10	Power module	
IC11	VCO.PLL	
IC12	5V AVR	Three-terminal regulator 
Q1, Q2	High-frequency amplification	Operation during reception
Q3	First mixer	Operation during reception
Q6	Receiving PLL output amplification	Operation during reception
Q7	First IF amplification	Operation during reception. 59.7 MHz

## DESCRIPTION OF COMPONENTS

No. 2

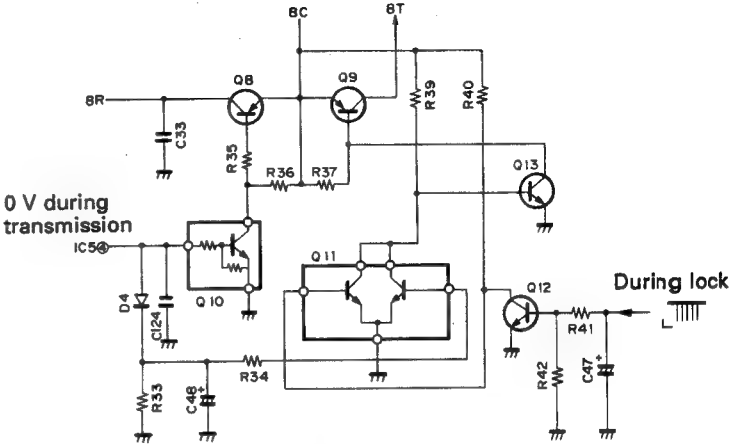Reference No.	Function	Description
Q8 ~ Q13	Transmission/reception power selection	 <p>Q8, Q10, and Q11 (b) are set "OFF" during transmission. Q9, Q12, and Q13 are set "ON" during transmission. Q8, Q10, Q11 (b), and Q12 are set "ON" during reception. Q9, Q11 (a), and Q13 are set "OFF" during reception.</p>
Q15, Q16, Q17	Inverter	
Q18	Modulation muting	ON during reception
Q19, Q20	8T voltage selection	OFF when low
Q21	PLL output amplification	
Q22	Transmitting PLL output amplification	Operation during transmission
Q23	8 V ripple filter	
Q24	APC control	Operation during transmission
Q25	Lower-power switch	ON when high
Q26	Squelch hysteresis switch	OFF when busy
Q28	Q1 POWER switch	ON during transmission
D3	IF level limiter	
D4, D17	Antireverse current	
D5, D15	Constant voltage circuit	
D6	Temperature compensation	APC
D7	Temperature compensation	Drive
D8	Overvoltage prevention	
D9	Power detection	APC
D10 ~ D13	Antenna switch	ON during transmission
D14	Power reverse connection protection	

# TM-742 A/742 E/942 A


## SEMICONDUCTOR DATA

### Power Transistor 2SC3240(28 TX-RX Unit)

#### ● Electrical characteristics

Item	Conditions	Maximum value
VCBO		50V
VEBO		5V
VCEO	$R_{BE} = \infty$	20V
IC		25A
Pc	$T_c = 25^\circ\text{C}$	270W
Tj		+175°C
Tstg		-55 ~ +175°C
Ta	$25 \pm 3^\circ\text{C}$	

#### ● External view




- ① Collector
- ② Base
- ③ Emitter
- ④ Emitter
- ⑤ Flange (Emitter)

### Power Transistor MRF492 (50 TX-RX Unit)

#### ● Electrical characteristics

Item	Conditions	Maximum value
VCBO		36V
VEBO		4.0V
VCEO		18V
IC		20A
Pd	$T_c = 25^\circ\text{C}$	250W
Tstg		-65 ~ +150°C

#### ● External view




- ① Emitter
- ② Base
- ③ Emitter
- ④ Collector


## SEMICONDUCTOR DATA

### Power module S-AV17 (144 TX-RX UNIT)

#### ● Equivalent circuit diagram

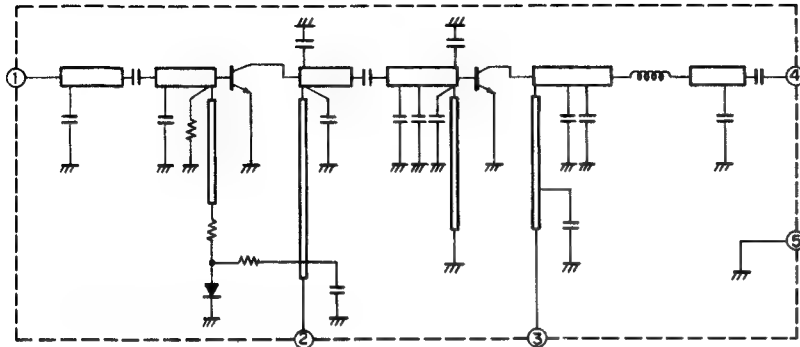

#### ● External view

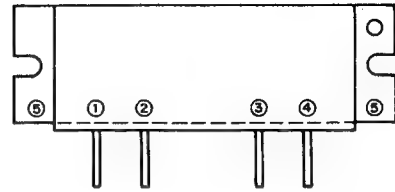


- ① Input terminal
- ② First power supply terminal
- ③ End power supply terminal
- ④ Output terminal
- ⑤ Fin (earth)

#### ● Electrical characteristics


Item	Symbol	Tc (°C)	Conditions	Standard value			Unit
				Minimum	Standard	Maximum	
Frequency	f			144		148	MHz
Output power	Po	25	Vcc = 12.5V, Pin = 400mW, Zg = Zl = 50Ω			65	W
Combined efficiency	ηT	25	Same as above	45			%
Harmonics	HRM	25	Same as above		-30	-25	dB

### Power module M57774 (220 TX-RX UNIT)

#### ● Equivalent circuit diagram

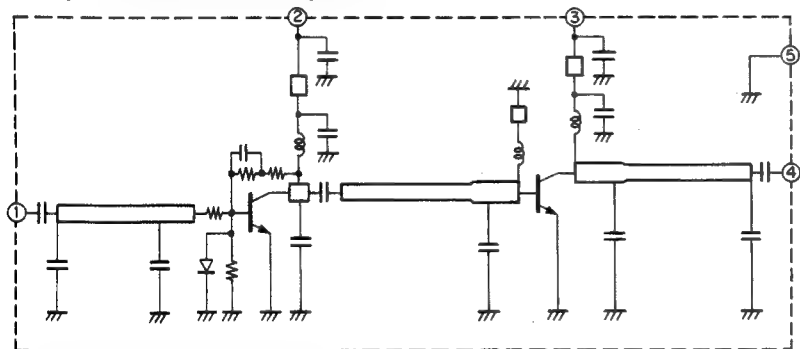

#### ● External view

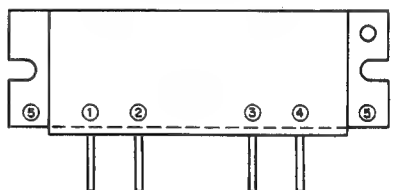

- ① Input terminal
- ② First power supply terminal
- ③ End power supply terminal
- ④ Output terminal
- ⑤ Fin (earth)

#### ● Electrical characteristics


Item	Symbol	Tc (°C)	Conditions	Standard value			Unit
				Minimum	Standard	Maximum	
Frequency	f			220		225	MHz
Output power	Po	25	Vcc = 12.5V, Pin = 0.3W, Zg = Zl = 50Ω	30	33	40	W
Combined efficiency	ηT	25	Same as above	43	48		%
Secondary spurious strength		25	Same as above			-30	dB
Tertiary spurious strength		25	Same as above			-35	dB

# TM-742 A/742 E/942 A


## SEMICONDUCTOR DATA

### Power module M57788M(430 TX-RX UNIT)

#### ● Equivalent circuit diagram

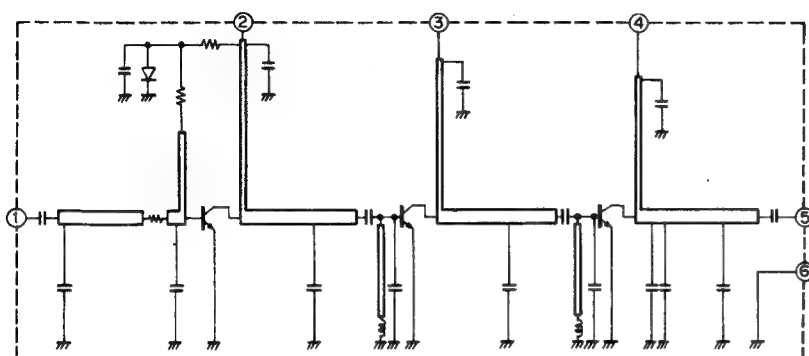

#### ● External view

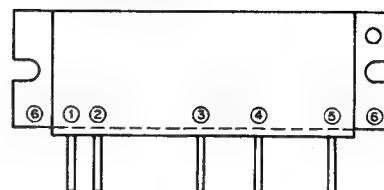


- ① Input terminal
- ② First power supply terminal
- ③ Driver power supply terminal
- ④ End power supply terminal
- ⑤ Output terminal
- ⑥ Fin (earth)

#### ● Electrical characteristics


Item	Symbol	Tc (°C)	Conditions	Standard value			Unit
				Minimum	Standard	Maximum	
Frequency	f			430		450	MHz
Output power	Po	25	Vcc = 12.5V, Pin = 400mW, Zg = Zl = 50Ω	40	45		W
Combined efficiency	ηT	25	Same as above	40	45		%
Secondary spurious strength		25	Same as above			-30	dB
Tertiary spurious strength		25	Same as above			-30	dB

### Power module M67711 (1200 TX-RX UNIT)

#### ● Equivalent circuit diagram

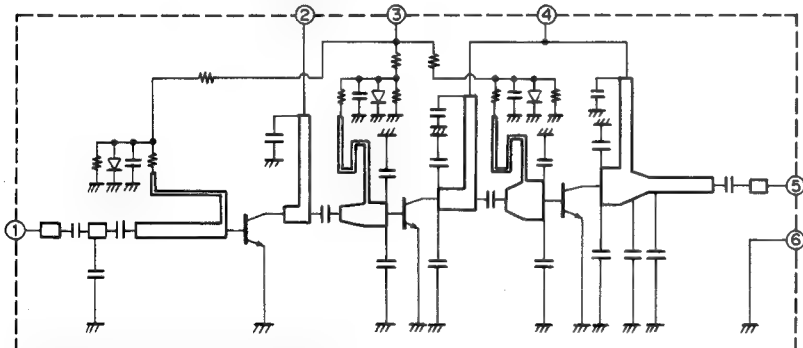

#### ● External view

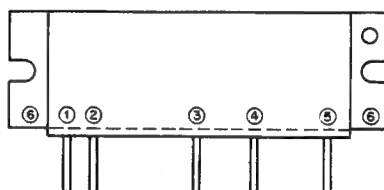

- ① Input terminal
- ② First power supply terminal
- ③ Driver power supply terminal
- ④ End power supply terminal
- ⑤ Output terminal
- ⑥ Fin (earth)

#### ● Electrical characteristics

Item	Symbol	Tc (°C)	Conditions	Standard value			Unit
				Minimum	Standard	Maximum	
Frequency	f			1.24		1.3	GHz
Output power	Po	25	Vcc = 12.5 V, Vbb = 10 V Pin = 1 W, Zg = Zl = 50Ω	16	17		W
Combined efficiency	ηT	25	Same as above	30	35		%
Secondary spurious strength		25	Same as above			-45	dB

## PARTS LIST

### CAPACITORS

CC 45 TH 1H 220 J  
1 2 3 4 5 6

- 1 = Type ..... ceramic, electrolytic, etc.
- 2 = Shape ..... round, square, etc.
- 3 = Temp. coefficient
- 4 = Voltage rating
- 5 = Value
- 6 = Tolerance

#### • Temperature Coefficient

1st Word	C	L	P	R	S	T	U
Color*	Black	Red	Orange	Yellow	Green	Blue	Violet
ppm/°C	0	-80	-150	-220	-330	-470	-750

CC45



#### • Capacitor value

- 0 1 0 = 1pF
- 1 0 0 = 10pF
- 1 0 1 = 100pF
- 1 0 2 = 1000pF = 0.001μF

1 0 3 = 0.01μF

2 2 0 = 22pF  
1st number | Multiplier  
2nd number

2nd Word	G	H	J	K	L
ppm/°C	± 30	± 60	± 120	± 250	± 500

Example CC45TH = -470 ± 60 ppm/°C

#### • Tolerance

Code	C	D	G	J	K	M	X	Z	P	No code
(%)	± 0.25	± 0.5	± 2	± 5	± 10	± 20	+ 40 - 20	+ 80 - 20	+ 100 - 0	10μF-10~+50 4.7μF-10~+75

Code	B	C	D	F	G
(pF)	± 0.1	± 0.25	± 0.5	± 1	± 2

Less than 10 pF

#### • Rating voltage

2nd word 1st word	A	B	C	D	E	F	G	H	J	K	V
0	1.0	1.25	1.6	2.0	2.5	3.15	4.0	5.0	6.3	8.0	-
1	10	12.5	16	20	25	31.5	40	50	63	80	35
2	100	125	160	200	250	315	400	500	630	800	-
3	1000	1250	1600	2000	2500	3150	4000	5000	6300	8000	-

#### • Chip capacitors

(EX) CC 73 F SL 1H 000 J  
1 2 3 4 5 6 7  
(Chip) (CH,RH,UJ,SL)  
(EX) CK 73 F F 1H 000 Z  
1 2 3 4 5 6 7  
(Chip) (B,F)

### RESISTORS

#### • Chip resistor (Carbon)

(EX) R 073 E B 2B 000 J  
1 2 3 4 5 6 7  
(Chip) (B,F)

#### • Carbon resistor (Normal type)

R 073 E B 2B 000 J  
1 2 3 4 5 6 7

- 1 = Type ..... ceramic, electrolytic, etc.
- 2 = Shape ..... round, square, etc.
- 3 = Dimension
- 4 = Temp. coefficient
- 5 = Voltage rating
- 6 = Value
- 7 = Tolerance.

#### Dimension


Dimension code	L	W	T
Empty	5.6 ± 0.5	5.0 ± 0.5	Less than 2.0
E	3.2 ± 0.2	1.6 ± 0.2	Less than 1.25
F	2.0 ± 0.3	1.25 ± 0.2	Less than 1.25

#### Dimension

Dimension code	L	W	T	Wattage
E	3.2 ± 0.2	1.6 ± 0.2	0.57	2B
F	2.0 ± 0.3	1.25 ± 0.2	0.45	2A

#### Rating wattage

Cord	Wattage	Cord	Wattage	Cord	Wattage
2A	1/10W	2E	1/4W	3A	1W
2B	1/8W	2H	1/2W	3D	2W
2C	1/6W				



# TM-742 A/742 E/942 A

## PARTS LIST

× New Parts

Parts without Parts No. are not supplied.

Les articles non mentionnés dans le Parts No. ne sont pas fournis.

Teile ohne Parts No. werden nicht geliefert.

TM-742

Ref. No.	Address	New Parts	Parts No.	Description	Destination	Remarks
参照番号	位置	新	部品番号	部品名 / 規格	仕向	備考
TM-742						
1	1A	*	A01-2068-03	METALLIC CABINET(UPPER)		
2	3A	*	A01-2069-03	METALLIC CABINET(BOTTOM)		
3	2F	*	A13-1601-02	FREM		
4	2E	*	A62-0206-02	PANEL (BODY)		
5	3C	*	A62-0219-03	PANEL ASSY (LOWER)		
6	2C	*	A62-0221-03	PANEL ASSY (742A)	KPMM2	
6	2C	*	A62-0222-03	PANEL ASSY (742E)	EE2E3	
7	2D	*	A82-0012-02	BACK PANEL (UPPER)		
8	3D	*	A82-0013-02	BACK PANEL (LOWER)		
10	2D	*	B03-0577-04	DRESSING PLATE		
14	2D	*	B41-0696-04	CAUTION LABEL		
15	1A, 1B		B42-2455-04	LABEL(M4x8 MAX)		
16	1B		B42-3343-04	LABEL(S/NO)		
-			B42-3394-04	LABEL(FCC)	KP	
18	1B		B42-3484-04	LABEL(SP, ANT)	KP	
18	1B		B42-3485-04	LABEL(SP, ANT)	EE2E3	
18	1B		B42-3485-04	LABEL(SP, ANT)	MM2	
19	2D	*	B42-3554-04	LABEL(M2.6x5 MAX)		
20	3J		B44-2163-04	UPC CODE LABEL(ITEM CARTON)		
-			B44-2165-04	UPC CODE LABEL(OUTER CARTON)		
22	1J		B46-0410-30	WARRANTY CARD	K	
22	1J		B46-0419-00	WARRANTY CARD	EE2E3	
22	1J		B46-0422-00	WARRANTY CARD	P	
23	1I, 1J	*	B59-0466-00	SUB-INSTRUCTION MANUAL		
24	1J	*	B62-0287-10	INSTRUCTION MANUAL		
25	1J	*	B62-0288-00	INSTRUCTION MANUAL	MM2E3	
25	1J	*	B62-0289-00	INSTRUCTION MANUAL	EE2	
30	1I	*	B62-0345-00	INSTRUCTION MANUAL(FRANCE)	PMM2E3	
27	1B	*	B72-0504-04	MODEL NAME PLATE(TM-742A)	KP	
27	1B	*	B72-0505-04	MODEL NAME PLATE(TM-742A)	MM2	
27	1B	*	B72-0506-04	MODEL NAME PLATE(TM-742E)	EE2E3	
28	1E	*	D32-0417-04	STOPPER		
29	1A, 2B		E23-0676-04	TERMINAL		
-			E30-3006-08	CURL CORD		
31	2I		E30-3034-05	DC CORD (ACSY)		
32	2A, 2D	*	E30-3135-15	CONNECTING WIRE(COMMON-PANEL)		
33	2E		E37-0006-05	CONNECTING WIRE(SPEAKER)		
34	2F	*	E37-0325-05	FLAT CABLE(16P)		
35	2F	*	E37-0326-05	CONNECTING WIRE(FAN)		
36	3E	*	F01-0992-03	HEAT SINK(COMMON AVR, SP)		
37	3E	*	F01-0993-04	HEAT SINK		
38	1B		F07-1203-13	COVER(FAN)		
39	3D	*	F07-1232-04	COVER(PANEL..UPPER)		
40	1D, 2E		F07-1345-04	COVER(PANEL..LOWER)		
-		*	F15-0679-04	SHADE PLATE(8 KEYS)		
42	2I		F51-0017-05	FUSE(15A·ACSY)		
-			F51-0018-05	FUSE(20A·DC CORD)		
44	1E		G01-0833-04	COMPRESSION SPRING		
-			G02-0505-05	LEAF SPRING (VOL KNOB)		
50	2E		G02-0716-04	FLAT SPRING(SPEAKER)		
51	1B		G10-0663-04	NON-WOVEN FABRIC(100X85)		

A: TM-742 K, P, M, M2, E, E2, E3

B: TM-942 K, P, M



## PARTS LIST

\* New Parts

Parts without Parts No. are not supplied.

Les articles non mentionnés dans le Parts No. ne sont pas fournis.

Teile ohne Parts No. werden nicht geliefert.

TM-742

Ref. No. 参照番号	Address 位置	New Parts 新	Parts No. 部品番号	Description 部品名 / 規格	Desti- nation 仕向	Re- marks 備考
52	1A, 3A		G10-0686-04	NON-WOVEN FABRIC(130X5)		
53	1E, 2F		G10-0700-04	NON-WOVEN FABRIC(60X10)		
54	1B		G10-0709-04	NON-WOVEN FABRIC(145X5)		
-		*	G10-0724-04	NON-WOVEN FABRIC(CASE)		
56	1D	*	G11-0680-03	SHEET(PANEL...UPPER)		
57	3D	*	G11-0681-13	SHEET(PANEL...LOWER)		
-		*	G11-0688-04	SHEET(CPU...50X25)		
-		*	G11-0690-14	SHEET(30X30...ENCODER)		
59	3B, 2E		G53-0508-04	NON-WOVEN FABRIC(30X10)		
60	3I	*	H10-2696-12	POLYSTYRENE FORMED FIXTURE		
61	1I	*	H11-0856-24	PACKING FIXTURE	PMM2	
61	1I	*	H11-0856-24	PACKING FIXTURE	EE2E3	
47	1I	*	H11-0857-24	PACKING FIXTURE	PMM2	
47	1I	*	H11-0857-24	PACKING FIXTURE	EE2E3	
48	1J	*	H13-0861-04	PACKING FIXTURE	K	
62	3I	*	H13-0897-04	PROTECTION BOARD(150X30)		
-		*	H13-0901-04	PROTECTION BOARD(260X325)	PMM2	
-		*	H13-0901-04	PROTECTION BOARD(260X325)	EE2E3	
63	2I		H25-0029-04	PROTECTION BAG	KP	
64	2I		H25-0079-04	PROTECTION BAG(200X200)		
65	2J		H25-0723-04	PROTECTION BAG(230X400)		
49	1I		H25-0750-04	PROTECTION BAG(170X270)	PMM2	
49	1I		H25-0750-04	PROTECTION BAG(170X270)	EE2E3	
66	3J	*	H52-0370-04	ITEM CARTON BOX(TM-742A, 440M)	KP	
66	3J	*	H52-0371-04	ITEM CARTON BOX(TM-742A, 430M)	MM2	
66	3J	*	H52-0372-04	ITEM CARTON BOX(TM-742E)	EE2E3	
-		*	H62-0323-04	OUTER CARTON BOX(TM-742A)	KPMM2	
-		*	H62-0324-04	OUTER CARTON BOX(TM-742E)	EE2E3	
67	2I		J20-0319-24	MIC HOOK(ACSY)	KP	
68	1B		J21-4308-14	MOUNTING HARDWARE(FAN)		
69	1B, 3B		J21-4352-03	MOUNTING HARDWARE		
70	1E	*	J21-4404-04	MOUNTING HARDWARE(RELEASE)		
71	2D	*	J21-4405-04	MOUNTING HARDWARE(PANEL)		
72	2J		J29-0454-03	WIRING BOARD (ACSY)		
73	1B		J42-0452-05	BUSHING		
86	3C	*	K29-4805-04	KNOB ENCODER		
87	3C	*	K29-4806-04	KNOB(BUTTON) MHZ		
89	3C	*	K29-4808-04	KNOB SQL		
90	3C	*	K29-4840-04	KNOB ASSY VOL		
-			L15-0310-25	LOW-FREQUENCY CHOKE COIL		
A	2A, 2B		N09-2084-05	SCREW (PLUS TERMINAL)		
C	2B, 3B		N30-3030-46	PAN HEAD MACHINE SCREW(UNIT)		
E	2A, 2B		N32-2606-46	FLAT HEAD MACHINE SCREW(TX-RX)		
F	1A, 1B		N33-2606-45	OVAL HEAD MACHINE SCREW(CASE)		
G	1B		N33-2614-45	OVAL HEAD MACHINE SCREW(FAN)		
H	1E		N35-2605-45	BINDING HEAD SCREW (PANEL)		
I	2I		N46-3010-46	PAN HEAD TAP SCREW (MIC HOOK)	KP	
J	2D, 3D		N80-2006-45	PAN HEAD TAPTITE SCREW(PANEL)		
K	1D		N80-2008-45	PAN HEAD TAPTITE SCREW(PANEL)		
L	2A, 2D	*	N80-2605-45	PAN HEAD TAPTITE SCREW(PANEL)		
M	1A, 1B		N86-2606-45	SCREW (CASE)		
N	2F, 3F		N87-2606-46	BRAZIER HEAD TAPTITE SCREW		
O	3E		N87-2608-46	BRAZIER HEAD TAPTITE SCREW		

A: TM-742 K, P, M, M2, E, E2, E3

B: TM-942 K, P, M

# TM-742 A/742 E/942 A

## PARTS LIST

× New Parts

Parts without Parts No. are not supplied.

Les articles non mentionnés dans le Parts No. ne sont pas fournis.

Teile ohne Parts No. werden nicht geliefert.

TM-742  
TM-942

Ref. No. 参照番号	Address 位置	New Parts 新	Parts No. 部品番号	Description 部品名 / 規格	Desti- nation 仕 向	Re- marks 備考
P	3I		N89-2005-46 N99-0331-05	PAN HEAD TAP SCREW (RELEASE) SCREW SET(ACSY)		
SP1	2E		T07-0286-05	SPEAKER		
FAN	1B		T42-0310-25	FAN MOTOR		
MIC	1I		T91-0396-05	MICROPHONE	MM2	
MIC	1I		T91-0397-05	MICROPHONE (DTMF)	KP	
MIC	1I		T91-0398-05	MICROPHONE	EE2E3	
92	2I		W01-0414-04	SPANNER(ACSY)		
93	3F	*	X53-3460-11	CONTROL UNIT	KP	
93	3F	*	X53-3460-21	CONTROL UNIT	M	
93	3F	*	X53-3460-22	CONTROL UNIT	M2	
93	3F	*	X53-3462-71	CONTROL UNIT	EE3	
93	3F	*	X53-3462-72	CONTROL UNIT	E2	
94	1D	*	X54-3130-11	DISPLAY UNIT		
95	2B		X57-3580-12	TX-RX UNIT(144M 50W)		
96	2B	*	X57-3590-12	TX-RX UNIT(440M 35W)	KP	
96	2B	*	X57-3590-22	TX-RX UNIT(430M 35W)	MM2	
96	2B		X57-3592-72	TX-RX UNIT(430M 35W)	EE2E3	
-			490-0160-05	SHEET (FRONT GLASS)		
-			490-0010-05	SHEET (FPC)		
TM-942						
1	1A	*	A01-2068-03	METALLIC CABINET(UPPER)		
2	3A	*	A01-2069-03	METALLIC CABINET(BOTTOM)		
3	2F	*	A13-1601-02	FRAME		
6	2C	*	A62-0197-03	PANEL ASSY (UPPER)		
4	2E	*	A62-0206-02	PANEL (BODY)		
5	3C	*	A62-0219-03	PANEL ASSY (LOWER)		
7	2D	*	A82-0012-02	BACK PANEL (UPPER)		
8	3D	*	A82-0013-02	BACK PANEL (LOWER)		
10	2D	*	B03-0577-04	DRESSING PLATE		
14	2D	*	B41-0696-04	CAUTION LABEL		
15	1A, 1B		B42-2455-04	LABEL (M4x8 MAX)		
16	1B		B42-3343-04	LABEL (S/NO)		
-			B42-3394-14	LABEL (FCC)	KP	
18	1B		B42-3412-04	LABEL (SP.ANT)	M	
18	1B		B42-3440-04	LABEL (SP.ANT)	KP	
19	2D	*	B42-3554-04	LABEL (M2.6x5 MAX)		
20	3J		B44-2163-04	UPC CODE LABEL(ITEM CARTON)		
-			B44-2165-04	UPC CODE LABEL(OUTER CARTON)		
22	1J		B46-0410-30	WARRANTY CARD	K	
22	1J		B46-0422-00	WARRANTY CARD	P	
23	1I, 1J	*	B59-0466-00	SUB INSTRUCTION MANUAL		
24	1I, 1J	*	B62-0287-10	INSTRUCTION MANUAL		
25	1I	*	B62-0288-00	INSTRUCTION MANUAL	M	
30	1I	*	B62-0345-00	INSTRUCTION MANUAL(FRANCE)	MP	
27	1B	*	B72-0476-04	MODEL NAME PLATE (942A)	KP	
27	1B	*	B72-0477-04	MODEL NAME PLATE (942A)	M	
28	1E	*	D32-0417-04	STOPPER		
29	1A, 2B		E23-0657-04	TERMINAL		
-			E30-3006-08	CURL CODE		
31	2I		E30-3034-05	DC CODE (ACSY)		
32	2A, 2D	*	E30-3135-15	CONNECTING WIRE(PANEL)		

A: TM-742 K, P, M, M2, E, E2, E3  
B: TM-942 K, P, M

# TM-742 A/742 E/942 A

## PARTS LIST

× New Parts

Parts without Parts No. are not supplied.

Les articles non mentionnés dans le Parts No. ne sont pas fournis.

Telle ohne Parts No. werden nicht geliefert.

TM-942

Ref. No. 参照番号	Address 位置	New Parts 新	Parts No. 部品番号	Description 部品名 / 規格	Desti- nation 仕 向	Re- marks 備考
33	2F		E37-0006-05	CONNECTING WIRE(SPEAKER)		
34	2F	*	E37-0325-05	FLAT CABLE (16P)		
35	2F	*	E37-0326-05	CONNECTING WIRE (FAN)		
36	3E	*	F01-0992-03	HEAT SINK (AVR,SP)		
37	3E	*	F01-0993-04	HEAT SINK		
38	1B		F07-1203-13	COVER (FAN)		
39	3D	*	F07-1232-04	COVER (PANEL..LOWER)		
40	1D, 2E		F07-1345-04	COVER (PANEL..UPPER)		
42	2I		F51-0017-05	FUSE (15A..ACSY)		
-			F51-0018-05	FUSE (20A..DC CODE)		
44	1E		G01-0833-04	COMPRESSION SPRING		
-			G02-0505-05	LEAF SPRING (VOL KNOB)		
50	2E		G02-0716-04	FRAT SPRING (SPEAKER)		
51	1B		G10-0663-04	NON-WOVEN FABRRIC(100X85)		
52	1A, 3A		G10-0686-04	NON-WOVEN FABRRIC(130X5)		
53	1E, 2F		G10-0700-04	NON-WOVEN FABRRIC(60X10)		
56	1D	*	G11-0680-03	SHEET (PANEL..UPPER)		
57	3D	*	G11-0681-13	SHEET (PANEL..LOWER)		
-		*	G11-0688-04	SHEET (50x25..CPU)		
-		*	G11-0690-14	SHEET (30X20..ENCODER)		
59	3B, 2E		G53-0508-04	NON-WOVEN FABRIC(30X10)		
60	3I	*	H10-2696-12	POLYSTYRENE FOAMED FIXTURE		
61	1I	*	H11-0856-24	PACKING FIXTURE		PM
47	1I	*	H11-0857-24	PACKING FIXTURE		PM
-		*	H13-0861-04	PROTECTION BOARD		K
-		*	H13-0901-04	PROTECTION BOARD		PM
62	3I	*	H13-0897-04	PROTECTION BOARD(150X30)		
63	2I		H25-0029-04	BAG		KP
64	2I		H25-0079-04	BAG (200X200)		
65	3J		H25-0723-04	BAG (230X400)		
-			H25-0750-04	BAG (170X270)		PM
66	3J	*	H52-0334-04	ITEM CARTON BOX(942A)		KP
66	3J	*	H52-0335-04	ITEM CARTON BOX(942A)		M
-		*	H62-0291-04	OUTER CARTON BOX		
67	2I		J20-0319-24	MIC FOOK (ACSY)		KP
68	1B		J21-4308-14	MOUNTING HARDWARE(FAN)		
70	1E	*	J21-4404-04	MOUNTING HARDWARE(RELEASE)		
71	2D	*	J21-4405-04	MOUNTING HARDWARE(PANEL)		
72	2J		J29-0454-03	WIRING BOARD(ACSY)		
73	3B		J69-0325-05	Ø RING (NUT)		
86	3C	*	K29-4805-04	KNOB (ENCODER)		
87	3C	*	K29-4806-04	KNOB (MHz)		
89	3C	*	K29-4808-04	KNOB (SQL)		
90	3C	*	K29-4840-04	KNOB ASSY (VOL)		
-			L15-0310-25	LOW-FREQUENCY CHOKE COIL		
A	2A, 2B		N09-2084-05	SCREW (PULS TERMINAL)		
B	3B		N10-2030-46	HEXAGON NUT(BAND UNIT)		
D	2B		N30-3040-46	PAN HEAD MACHIN SCREW		
E	2A, 2B		N32-2606-46	FLAT HEAD MACHIN SCREW		
F	1A, 1B		N33-2606-45	ØVAL HEAD MACHIN SCREW		
G	1B		N33-2614-45	ØVAL HEAD MACHIN SCREW		

A: TM-742 K, P, M, M2, E, E2, E3

B: TM-942 K, P, M

# TM-742 A/742 E/942 A

## PARTS LIST

× New Parts

Parts without Parts No. are not supplied.

Les articles non mentionnés dans le Parts No. ne sont pas fournis.

Teile ohne Parts No. werden nicht geliefert.

TM-942

CONTROL UNIT (X53-3460-XX)

Ref. No. 参照番号	Address 位 置	New Parts 新	Parts No. 部 品 番 号	Description 部 品 名 / 規 格	Desti- nation 仕 向	Re- marks 備考
H I J K L	1E 2I 2D, 3D 1D 2A, 2D	*	N35-2605-45 N46-3010-46 N80-2006-45 N80-2008-45 N80-2605-45	BINDING HEAD MACHINE SCREW PAN HEAD TAPPING SCREW PAN HEAD TAPTITE SCREW(PANEL) PAN HEAD TAPTITE SCREW(PANEL) PAN HEAD TAPTITE SCREW(PANEL)	KP	
M N O	1A, 1B 3E, 2F 3E		N86-2606-45 N87-2606-46 N87-2608-46 N89-2005-46 N99-0331-05	SCREW (CASE) BRAZIER HEAD TAPTITE SCREW BRAZIER HEAD TAPTITE SCREW PAN HEAD TAPTITE SCREW(RELEASE SCREW SET (ACSY)	)	
P	3I					
SP1 FAN MIC MIC	2E 1B 1I 1I	*	T07-0268-05 T42-0310-25 T91-0396-05 T91-0397-05	LOUDSPEAKER(FULLRANGE) FAN MOTOR MICROPHONE MICROPHONE	M KP	
92	2I		W01-0414-04	SPANNER (ACSY)		
93 93 94 95 96	3F 3F 1D, 3D 2B 2B	* * *	X53-3460-11 X53-3460-21 X54-3130-11 X57-3580-11 X57-3590-13	CONTROL CIRCUIT UNIT CONTROL CIRCUIT UNIT DISPLAY UNIT TX-RX UNIT (144MHZ 50W) TX-RX UNIT (440MHZ 35W)	KP M  KP	
96 97	2B 2B		X57-3590-23 X57-3600-11	TX-RX UNIT (430MHZ 35W) TX-RX UNIT (1200MHZ 10W)	M	
CONTROL UNIT (X53-3460-XX)						
C1 C5 C6 C7 C8	-4		CK73FB1H102K CK73FB1E104K CK73FF1C105Z CK73FB1E223K CK73FB1H102K	CHIP C 1000PF K CHIP C 0.10UF K CHIP C 1.0UF Z CHIP C 0.022UF K CHIP C 1000PF K		
C9 C10 C11 C12 C13			CK73FB1E104K CK73FB1H102K CK73FB1E104K CK73FB1H102K CK73FF1C105Z	CHIP C 0.10UF K CHIP C 1000PF K CHIP C 0.10UF K CHIP C 1000PF K CHIP C 1.0UF Z		
C14 C15 C16 C18 C19	, 17		CK73FB1E104K C92-0507-05 CC73FSL1H101J CK73FB1H472K CC73FCH1H120J	CHIP C 0.10UF K CHIP TAN 4.7UF 6.3WV CHIP C 100PF J CHIP C 4700PF K CHIP C 12PF J		
C20 C21 C23 C24 C25	, 22		CK73FB1H123K CC73FCH1H220J CK73FB1H182K CC73FCH1H151J CC73FSL1H101J	CHIP C 0.012UF K CHIP C 22PF J CHIP C 1800PF K CHIP C 150PF J CHIP C 100PF J		
C26 C27 C28 C29 C31	, 30		CK73FB1H102K CK73FF1C105Z CK73FB1E223K CK73FF1C105Z CB04EW1A221M	CHIP C 1000PF K CHIP C 1.0UF Z CHIP C 0.022UF K CHIP C 1.0UF Z ELECTRO 220UF 10WV		
C32 C35 C36 C37 C38	-34		CK73FB1H102K CK73FB1E104K CC73FCH1H121J CC73FCH1H390J CC73FCH1H330J	CHIP C 1000PF K CHIP C 0.10UF K CHIP C 120PF J CHIP C 39PF J CHIP C 33PF J		

A: TM-742 K, P, M, M2, E, E2, E3

B: TM-942 K, P, M

## PARTS LIST

× New Parts

Parts without Parts No. are not supplied.

Les articles non mentionnés dans le Parts No. ne sont pas fournis.

Teile ohne Parts No. werden nicht geliefert.

### CONTROL UNIT (X53-3460-XX)

Ref. No. 参照番号	Address 位置	New Parts 新	Parts No. 部品番号	Description 部品名 / 規格	Desti- nation 仕向	Re- marks 備考
C39 -41			CK73FB1E103K	CHIP C 0.01UF K		
C42			CK73FB1H102K	CHIP C 1000PF K		
C43			CK73FB1E104K	CHIP C 0.10UF K		
C44			CK73FB1E103K	CHIP C 0.01UF K		
C45			CK73FB1H332K	CHIP C 3300PF K		
C46			CC73PSL1H101J	CHIP C 100PF J		
C47			CK73FB1E103K	CHIP C 0.01UF K		
C48			CK73FB1E223K	CHIP C 0.022UF K		
C49			CK73FB1E103K	CHIP C 0.01UF K		
C50 -52			CK73FB1H102K	CHIP C 1000PF K		
C53			CK73FB1E104K	CHIP C 0.10UF K		
C101			CK73FF1C105Z	CHIP C 1.0UF Z		
C102,103			CK73FB1H102K	CHIP C 1000PF K		
C104			CE04EW1C470M	ELECTRO 47UF 16WV		
C105			CK73FB1H102K	CHIP C 1000PF K		
C106			CE04EW1A470M	ELECTRO 47UF 10WV		
C107,108			CK73FB1E123K	CHIP C 0.012UF K		
C109			C92-0507-05	CHIP TAN 4.7UF 6.3WV		
C110			CK73FB1H682K	CHIP C 6800PF K		
C111			CK73FF1C105Z	CHIP C 1.0UF Z		
C112			CK73FB1H102K	CHIP C 1000PF K		
C113			CK73FB1E103K	CHIP C 0.01UF K		
C114			CK73FB1H102K	CHIP C 1000PF K		
C115-117			CK73FB1E104K	CHIP C 0.10UF K		
C118			CK73FF1C105Z	CHIP C 1.0UF Z		
C119			CK73FB1H102K	CHIP C 1000PF K		
C120			CC73PSL1H101J	CHIP C 100PF J		
C121			CK73FB1H102K	CHIP C 1000PF K		
C122			CK73FB1E123K	CHIP C 0.012UF K		
C123			CK73FB1E104K	CHIP C 0.10UF K		
C124,125			CE04EW1A470M	ELECTRO 47UF 10WV		
C126			CE04EW1A471M	ELECTRO 470UF 10WV		
C127,128			CE04EW1A470M	ELECTRO 47UF 10WV		
C129			CE04EW1C101M	ELECTRO 100UF 16WV		
C130-133			CE04EW1A470M	ELECTRO 47UF 10WV		
C134			CE04EW1C101M	ELECTRO 100UF 16WV		
C135-137			CE04EW1A471M	ELECTRO 470UF 10WV		
C138			CE04EW1C470M	ELECTRO 47UF 16WV		
C139			CK73FF1C105Z	CHIP C 1.0UF Z		
C140,141			CK73FB1H102K	CHIP C 1000PF K		
C142			CK73FB1E223K	CHIP C 0.022UF K		
C143-145			CK73FB1E104K	CHIP C 0.10UF K		
C146,147			CK73FF1C105Z	CHIP C 1.0UF Z		
C148			C90-2167-05	ELECTROLYTIC CAPACITOR(LEAD)		
C149			CE04EW1A101M	ELECTRO 100UF 10WV		
C151-153			CC73PSL1H101J	CHIP C 100PF J		
C154			CE04EW1A471M	ELECTRO 470UF 10WV		
IC101			CXD1095Q			
CN1			E40-5425-05	PIN CONNECTOR FOR INSIDE		
CN2			E40-5224-05	PIN CONNECTOR FOR INSIDE		
CN3			E40-3246-05	PIN CONNECTOR FOR INSIDE		
CN4			E40-3248-05	PIN CONNECTOR FOR INSIDE		
CN5			E40-5343-05	PIN CONNECTOR FOR INSIDE		
CN101-106			E40-5452-05	PIN CONNECTOR FOR INSIDE		

A: TM-742 K, P, M, M2, E, E2, E3  
B: TM-942 K, P, M

# TM-742 A/742 E/942 A

## PARTS LIST

× New Parts

Parts without Parts No. are not supplied.

Les articles non mentionnés dans le Parts No. ne sont pas fournis.

Teile ohne Parts No. werden nicht geliefert.

CONTROL UNIT (X53-3460-XX)

Ref. No. 参照番号	Address 位置	New Parts 新	Parts No. 部品番号	Description 部品名 / 規格	Desti- nation 仕向	Re- marks 備考
CN107 CN108 CN109 J1 J2			E40-5224-05 E40-5408-05 E40-3299-05 E11-0448-05 E08-0876-05	PIN CONNECTOR FOR INSIDE PIN CONNECTOR FOR INSIDE PIN CONNECTOR FOR INSIDE PHONE JACK RECTANGULAR RECEPTACLE		
W101		*	E37-0329-05	CONNECTING WIRE		
F101		*	F53-0095-05	FUSE(1.2A)		
		*	G11-0691-04 G13-1396-04	AUXILIARY PART FORMED PLATE		
			J30-0563-05	SPACER		
IC102 L1 X1 X2 X3		*	L7808CV L92-0131-05 L77-1516-05 L77-1441-05 L78-0301-05	RESONATOR CORE CRYSTAL RESONATOR CRYSTAL RESONATOR RESONATOR(3.5795MHZ)		
X4			L78-0089-05	RESONATOR(480KHZ)		
CP1 ,2 CP3 ,4 R1 -3 R4 -6 R7		*	R90-0729-05 R90-0727-05 RK73FB2A102J RK73FB2A473J RK73FB2A102J	MULTIPLE COMPONENTS (C.R.L.) MULTIPLE COMPONENTS (C.R.L.) CHIP R 1.0K J 1/10W CHIP R 47K J 1/10W CHIP R 1.0K J 1/10W		
R8			RK73FB2A472J	CHIP R 4.7K J 1/10W		
R9			RK73FB2A102J	CHIP R 1.0K J 1/10W		
R10			RK73FB2A154J	CHIP R 150K J 1/10W		
R11			RK73FB2A223J	CHIP R 22K J 1/10W		
R12			RK73FB2A102J	CHIP R 1.0K J 1/10W		
R13			RK73FB2A332J	CHIP R 3.3K J 1/10W		KPMM2
R13			RK73FB2A561J	CHIP R 560 J 1/10W		EE2E3
R14			RK73FB2A392J	CHIP R 3.9K J 1/10W		KPMM2
R14			RK73FB2A822J	CHIP R 8.2K J 1/10W		EE2E3
R15			RK73FB2A183J	CHIP R 18K J 1/10W		
R16			RK73FB2A104J	CHIP R 100K J 1/10W		
R17			RK73FB2A182J	CHIP R 1.8K J 1/10W		
R18			RK73FB2A221J	CHIP R 220 J 1/10W		
R19			RK73FB2A123J	CHIP R 12K J 1/10W		
R20			RK73FB2A823J	CHIP R 82K J 1/10W		
R21			RK73FB2A224J	CHIP R 220K J 1/10W		
R22			RK73FB2A184J	CHIP R 180K J 1/10W		
R23			RK73FB2A105J	CHIP R 1.0M J 1/10W		
R24			RK73FB2A472J	CHIP R 4.7K J 1/10W		
R25			RK73FB2A103J	CHIP R 10K J 1/10W		
R26			RK73FB2A473J	CHIP R 47K J 1/10W		
R27			RK73FB2A472J	CHIP R 4.7K J 1/10W		
R28			RK73FB2A103J	CHIP R 10K J 1/10W		
R29 ,30 R31			RK73FB2A474J RK73FB2A563J	CHIP R 470K J 1/10W CHIP R 56K J 1/10W		
R32			RK73FB2A474J	CHIP R 470K J 1/10W		
R33			RK73FB2A472J	CHIP R 4.7K J 1/10W		
R34			RK73FB2A334J	CHIP R 330K J 1/10W		
R35			RK73FB2A684J	CHIP R 680K J 1/10W		
R36			RK73FB2A473J	CHIP R 47K J 1/10W		

A: TM-742 K, P, M, M2, E, E2, E3

B: TM-942 K, P, M

# TM-742 A/742 E/942 A

## PARTS LIST

× New Parts

Parts without Parts No. are not supplied.

Les articles non mentionnés dans le Parts No. ne sont pas fournis.

Teile ohne Parts No. werden nicht geliefert.

CONTROL UNIT (X53-3460-XX)

Ref. No. 参照番号	Address 位置	New Parts 新	Parts No. 部品番号	Description 部品名 / 規格	Desti- nation 仕 向	Re- marks 備考
R37			RK73FB2A334J	CHIP R 330K J 1/10W		
R38			R92-0670-05	CHIP R 0 ΩHM		
R39			RK73FB2A101J	CHIP R 100 J 1/10W		
R40			RK73FB2A103J	CHIP R 10K J 1/10W		
R41			RK73FB2A152J	CHIP R 1.5K J 1/10W		
R42			RK73FB2A102J	CHIP R 1.0K J 1/10W		
R43			RK73FB2A394J	CHIP R 390K J 1/10W		
R44			RK73FB2A473J	CHIP R 47K J 1/10W		
R45			RK73FB2A472J	CHIP R 4.7K J 1/10W		
R46			R92-1291-05	FIXED RESISTOR		
R47			RK73FB2A153J	CHIP R 15K J 1/10W		
R48			RK73FB2A333J	CHIP R 33K J 1/10W		
R49			RK73FB2A223J	CHIP R 22K J 1/10W		
R50			RK73FB2A474J	CHIP R 470K J 1/10W		
R51 -53			RK73FB2A473J	CHIP R 47K J 1/10W		
R54 -57			R92-0670-05	CHIP R 0 ΩHM		
R58			RK73FB2A472J	CHIP R 4.7K J 1/10W		
R59			RK73FB2A103J	CHIP R 10K J 1/10W		
R60			RK73FB2A473J	CHIP R 47K J 1/10W	M2E2	
R61			RK73FB2A473J	CHIP R 47K J 1/10W	MM2	
R62			RK73FB2A473J	CHIP R 47K J 1/10W	EE2E3	
R64			RK73FB2A473J	CHIP R 47K J 1/10W	KPMM2	
R64			RK73FB2A473J	CHIP R 47K J 1/10W	EE3	
R65 ,66			RK73FB2A473J	CHIP R 47K J 1/10W		
R67			RK73FB2A473J	CHIP R 47K J 1/10W	KPMM2	
R67			RK73FB2A473J	CHIP R 47K J 1/10W	E2	
R68			RK73FB2A474J	CHIP R 470K J 1/10W		
R69			RK73FB2A121J	CHIP R 120 J 1/10W		
R70 ,71			RK73FB2A474J	CHIP R 470K J 1/10W		
R72			RK73FB2A682J	CHIP R 6.8K J 1/10W		
R73			RK73FB2A473J	CHIP R 47K J 1/10W	KPMEE2	
R74			RK73FB2A473J	CHIP R 47K J 1/10W	KP	
R74			RK73FB2A473J	CHIP R 47K J 1/10W	EE2E3	
R75			RK73FB2A473J	CHIP R 47K J 1/10W	KPMM2	
R76			RK73FB2A473J	CHIP R 47K J 1/10W		
R77			RK73FB2A473J	CHIP R 47K J 1/10W	E2	
R80			RK73FB2A473J	CHIP R 47K J 1/10W	EE3	
R81 ,82			RK73FB2A121J	CHIP R 120 J 1/10W		
R83			RK73FB2A102J	CHIP R 1K J 1/10W		
R101			RK73FB2A563J	CHIP R 56K J 1/10W		
R102-104			RK73FB2A223J	CHIP R 22K J 1/10W		
R105			RK73FB2A101J	CHIP R 100 J 1/10W		
R106,107			RK73FB2A332J	CHIP R 3.3K J 1/10W	EE2E3	
R108			RK73FB2A474J	CHIP R 470K J 1/10W		
R109			RK73FB2A183J	CHIP R 18K J 1/10W		
R110			RK73FB2A472J	CHIP R 4.7K J 1/10W		
R111			R92-0685-05	CHIP R 22 J 1/2W		
R112-114			RK73FB2A102J	CHIP R 1.0K J 1/10W		
R115			RK73FB2A183J	CHIP R 18K J 1/10W		
R116			RK73FB2A472J	CHIP R 4.7K J 1/10W		
R117,118			RK73FB2A183J	CHIP R 18K J 1/10W		
R119			RK73FB2A472J	CHIP R 4.7K J 1/10W		
R120			RK73FB2A103J	CHIP R 10K J 1/10W		
R121			R92-1215-05	CHIP R 470 J 1/2W		
R122-124			RK73FB2A103J	CHIP R 10K J 1/10W		

A: TM-742 K, P, M, M2, E, E2, E3

B: TM-942 K, P, M

# TM-742 A/742 E/942 A

## PARTS LIST

× New Parts

Parts without Parts No. are not supplied.

Les articles non mentionnés dans le Parts No. ne sont pas fournis.

Teile ohne Parts No. werden nicht geliefert.

### CONTROL UNIT (X53-3460-XX)

Ref. No. 参照番号	Address 位置	New Parts 新	Parts No. 部品番号	Description 部品名 / 規格	Desti- nation 仕向	Re- marks 備考
R125-129 R130-133 R134 R135 R136, 137			RK73FB2A104J RK73FB2A183J RK73FB2A4R7J RK73FB2A473J RK73FB2A101J	CHIP R 100K J 1/10W CHIP R 18K J 1/10W CHIP R 4.7 J 1/10W CHIP R 47K J 1/10W CHIP R 100 J 1/10W		
R138, 139 R140, 141 R142 R143-145 R146			RK73FB2A473J RK73FB2A101J RK73FB2A473J RK73FB2A4R7J RK73FB2A474J	CHIP R 47K J 1/10W CHIP R 100 J 1/10W CHIP R 47K J 1/10W CHIP R 4.7 J 1/10W CHIP R 470K J 1/10W		
R147, 148 R149 R150 R151			RK73FB2A183J RK73FB2A332J RK73FB2A474J RK73FB2A472J	CHIP R 18K J 1/10W CHIP R 3.3K J 1/10W CHIP R 470K J 1/10W CHIP R 4.7K J 1/10W	EE2E3	
D1 D2 -4 D5 D6 D101-103		*	DAN202U MA112 DTZ9.1(A) MA112 DA204U	DIODE DIODE DIODE DIODE DIODE		
IC1 IC2 IC3 IC4 IC5		*	HD6433388A04F LC3564PML-12 TA78L06F TC74HC133AF TC74HC00AF	IC(CPU) IC(8192 X8 RAM) IC IC IC(2-INPUT NAND GATE)		
IC6 IC7 IC8 IC9 IC10		*	S-3520CF HD74HC165FP BU4066BF NJM4558E TC35219F	IC IC IC(ANALOG SWITCH X4) IC(OP AMP) IC		
IC11 IC12 IC13, 14 IC15 IC16		*	LC7385M PST7030MT TC4S11F TC4W66F TC4S66F	IC(DTMF DECODER) IC IC(2 INPUT NAND GATE) IC IC(BILATERAL SWITCH)		
IC103 IC104, 105 IC106 IC108, 109 IC110			NJM4558E LA4446 BU4053BF BU4053BF TC4S66F	IC(OP AMP) IC(AF POWER AMP) IC(ANALOG MULTIPLEXER) IC(ANALOG MULTIPLEXER) IC(BILATERAL SWITCH)		
IC112 IC113 IC114 Q1 Q2		*	KCC06 KCX04 KCC07 2SC3722K(S) 2SC4116(Y)	IC IC IC TRANSISTOR TRANSISTOR		
Q3 Q4 Q5 ,6 Q7 Q8		*	DTC114EU 2SB815(6, 7) 2SC4116(Y) DTC114EU 2SD1757K	DIGITAL TRANSISTOR TRANSISTOR TRANSISTOR DIGITAL TRANSISTOR TRANSISTOR		
Q9 ,10 Q11 Q101 Q102 Q103			2SC4116(Y) DTA144EU 2SC4116(Y) 2SA1641(S, T) DTC144EK	TRANSISTOR DIGITAL TRANSISTOR TRANSISTOR TRANSISTOR DIGITAL TRANSISTOR		

A: TM-742 K, P, M, M2, E, E2, E3

B: TM-942 K, P, M



## PARTS LIST

× New Parts

Parts without Parts No. are not supplied.

Les articles non mentionnés dans le Parts No. ne sont pas fournis.

Telle ohne Parts No. werden nicht geliefert.

CONTROL UNIT (X53-3460-XX)

DISPLAY UNIT (X54-3130-XX)

Ref. No. 参照番号	Address 位置	New Parts 新	Parts No. 部品番号	Description 部品名 / 規格	Desti- nation 仕向	Re- marks 備考
Q104 Q105 Q106 Q107-109 BA1			DTA144EK DTD143EK 2SC4116(Y) 2SD1757K W09-0573-05	DIGITAL TRANSISTOR DIGITAL TRANSISTOR TRANSISTOR TRANSISTOR LITHIUM BATTERY		
<b>DISPLAY UNIT (X54-3130-XX)</b>						
151 152	2D 1C	*	B11-1070-04 B11-1071-04	FILTER(LCD) FILTER(LCD)		
C1 C2 C3 C4 C5			CK73GB1H102K C92-0004-05 CK73GB1H102K C92-0045-05 CK73GB1H102K	CHIP C 1000PF K ELECTRO 1.0UF 16WV CHIP C 1000PF K ELECTRO 22UF 6.3WV CHIP C 1000PF K		
C6 ,7 C8 ,9 C10 -18 C19 ,20 C21 ,22			CC73GSL1H101J CC73GCH1H330J CK73GB1H102K CK73GB1H472K CK73GB1H102K	CHIP C 100PF J CHIP C 33PF J CHIP C 1000PF K CHIP C 4700PF K CHIP C 1000PF K		
C23 C101-103 C201 C202,203 C204,205			CK73GB1E103K CK73GB1H102K CK73GB1H102K CC73GSL1H101J CK73GB1E103K	CHIP C 0.010UF K CHIP C 1000PF K CHIP C 1000PF K CHIP C 100PF J CHIP C 0.010UF K		
C206-207 C208 C209			CK73GB1H102K C92-0047-05 CK73GB1E103K	CHIP C 1000PF K ELECTRO 47UF 6.3WV CHIP C 0.010UF K		
		*	E29-1112-14	CONNECTOR&TERMINAL		
		*	E37-0309-05			
CN1 CN2 CN3		*	E40-3262-05 E40-5587-05 E40-3262-05	PIN CONNECTOR FOR INSIDE PIN CONNECTOR FOR INSIDE PIN CONNECTOR FOR INSIDE		
CN101 CN201		*	E40-5587-05 E40-3262-05	PIN CONNECTOR FOR INSIDE PIN CONNECTOR FOR INSIDE		
153	1C	*	G11-0688-04	AUXILIARY PART		
154 155	2C 1C	*	J21-4409-03 J30-0563-05	MOUNTING HARDWARE(LCD) SPACER		
X1		*	L77-1504-05	CRYSTAL RESONATOR(4MHZ)		
Q	3C,3D		N14-0552-05	NUT (ENC,VOL)		
CP1 -5 R1 R2 R3 R4			R90-0720-05 RK73FB2A102J RK73GB1J681J RK73GB1J102J RK73GB1J681J	MULTI COMP 100K CHIP R 1.0K J 1/10W CHIP R 680 J 1/16W CHIP R 1.0K J 1/16W CHIP R 680 J 1/16W		
R5 R6 R7 R8 R9			RK73GB1J102J RK73GB1J681J RK73GB1J102J RK73GB1J681J RK73GB1J102J	CHIP R 1.0K J 1/16W CHIP R 680 J 1/16W CHIP R 1.0K J 1/16W CHIP R 680 J 1/16W CHIP R 1.0K J 1/16W		
R10 R11			RK73GB1J681J RK73GB1J102J	CHIP R 680 J 1/16W CHIP R 1.0K J 1/16W		

A: TM-742 K, P, M, M2, E, E2, E3

B: TM-942 K, P, M

# TM-742 A/742 E/942 A

## PARTS LIST

× New Parts

Parts without Parts No. are not supplied.

Les articles non mentionnés dans le Parts No. ne sont pas fournis.

Teile ohne Parts No. werden nicht geliefert.

DISPLAY UNIT (X54-3130-XX)  
144M TX-RX UNIT (X57-3580-XX)

Ref. No. 参照番号	Address 位置	New Parts 新	Parts No. 部品番号	Description 部品名 / 規格	Desti- nation 仕向	Re- marks 備考
R12			RK73GB1J681J	CHIP R 680 J 1/16W		
R13			RK73GB1J102J	CHIP R 1.0K J 1/16W		
R14 ,15			RK73GB1J103J	CHIP R 10K J 1/16W		
R16			RK73FB2A222J	CHIP R 2.2K J 1/10W		
R17			RK73GB1J331J	CHIP R 330 J 1/16W		
R18			RK73GB1J473J	CHIP R 47K J 1/16W		
R19			RK73GB1J470J	CHIP R 47 J 1/16W		
R20			RK73GB1J100J	CHIP R 10 J 1/16W		
R21			RK73GB1J105J	CHIP R 1.0M J 1/16W		
R101			RK73FB2A561J	CHIP R 560 J 1/10W		
R102			RK73FB2A102J	CHIP R 1.0K J 1/10W		
R103			RK73GB1J473J	CHIP R 47K J 1/16W		
R104			RK73FB2A272J	CHIP R 2.7K J 1/10W		
R105			RK73FB2A182J	CHIP R 1.8K J 1/10W		
R106			RK73FB2A272J	CHIP R 2.7K J 1/10W		
R201-203		*	RK73GB1J3R3J	CHIP R 3.3 J 1/16W		
R204,205			RK73GB1J100J	CHIP R 10 J 1/16W		
R206			RK73GB1J105J	CHIP R 1.0M J 1/16W		
R207			RK73GB1J104J	CHIP R 100K J 1/16W		
R208,209			RK73GB1J222J	CHIP R 2.2K J 1/16W		
R210			RK73GB1J223J	CHIP R 22K J 1/16W		
R211,212			RK73GB1J100J	CHIP R 10 J 1/16W		
VR1 -3		*	R23-9409-05	POTENTIOMETER		
S101-112			S70-0408-05	TACT SWITCH		
S113-115			S70-0409-15	TACT SWITCH		
D1		*	B38-0379-05	DISPLAY ASSY		
D2		*	MA112			
D3 ,4		*	MA720			
D101-105		*	B30-2025-05	LED		
		*	B30-2048-05	LED		
D107-112		*	B30-2053-05	LED		
D114		*	B30-2053-05	LED		
IC1		*	HD404719A26H	IC(CPU)		
IC2		*	L78LR05B-FA	IC		
IC3 -6		*	TC4S11F	IC(2 INPUT NAND GATE)		
IC201,202			MSM5265GS-V1K	IC(LCD DRIVER)		
IC203			TC4S11F	IC(2 INPUT NAND GATE)		
IC204		*	TC74HC73AF	IC		
IC205			NJM78L05UA	IC(VOLTAGE REGULATOR/ +5V)		
IC206			TC4S11F	IC(2 INPUT NAND GATE)		
PL1 -6			B30-0865-15	LAMP,LED		
Q1		*	2SA1745(6,7)			
Q2			2SB1119(S)			
Q3			DTC114EU	DIGITAL TRANSISTOR		
Q4 ,5			DTC144EU	DIGITAL TRANSISTOR		
Q101			DTC114EU	DIGITAL TRANSISTOR		
S1		*	W02-1744-05	FRONT END UNIT,ELECTRIC UNIT		
144M TX-RX UNIT (X57-3580-XX) -11: K -12: P, M						
200	2G		A10-1316-11	CHASSIS		
201	3G		B42-2437-04	LABEL(S/N0)		
C5			CC73FCH1H040C	CHIP C 4PF C		

A: TM-742 K, P, M, M2, E, E2, E3  
B: TM-942 K, P, M

## PARTS LIST

\* New Parts

Parts without Parts No. are not supplied.

Les articles non mentionnés dans le Parts No. ne sont pas fournis.

Telle ohne Parts No. werden nicht geliefert.

144M TX-RX UNIT (X57-3580-XX)

Ref. No. 参照番号	Address 位置	New Parts 新	Parts No. 部品番号	Description 部品名 / 規格	Desti- nation 仕 向	Re- marks 備考
C6			CK73FB1H102K	CHIP C 1000PF K		
C7 -9			CK73FB1H102K	CHIP C 1000PF K		
C10			CK73FB1E103K	CHIP C 0.01UF K		
C11			CC73FCH1H0R5C	CHIP C 0.5PF C		
C12			CC73FCH1H151J	CHIP C 150PF J		
C13			CC73FCH1H030C	CHIP C 3PF C		
C14			CC73FCH1H0R5C	CHIP C 0.5PF C		
C15			CC73FCH1H150J	CHIP C 15PF J		
C16			CC73FCH1H020C	CHIP C 2.0PF C		
C18			CK73FB1H102K	CHIP C 1000PF K		
C19			CC73FCH1H060D	CHIP C 6PF D		
C20			CK73FB1H102K	CHIP C 1000PF K		
C21			CC73FCH1H050C	CHIP C 5PF C		
C22			CK73FB1E103K	CHIP C 0.01UF K		
C23			CK73FB1H102K	CHIP C 1000PF K		
C24			CK73FB1E103K	CHIP C 0.01UF K		
C25			CC45SL2H020C	CERAMIC 2PF C		
C26			CK73FB1H102K	CHIP C 1000PF K		
C29			CK73FB1E103K	CHIP C 0.01UF K		
C30			CC73FCH1H390J	CHIP C 39PF J		
C31			CC73FCH1H101J	CHIP C 100PF J		
C32			CK73FB1H102K	CHIP C 1000PF K		
C33			CK73FB1E104K	CHIP C 0.10UF K		
C34 ,35			CK73EF1C105Z	CHIP C 1.0UF Z		
C36 ,37			CK73FB1E103K	CHIP C 0.01UF K		
C39			CC73FCH1H010C	CHIP C 1PF C		
C44 ,45			CE04NW1C470M	ELECTRO 47UF 16WV		
C46			C92-0504-05	CHIP TAN 0.68UF 20WV		
C47			CE04NW1C470M	ELECTRO 47UF 16WV		
C48			C92-0003-05	CHIP TAN 0.47UF 25WV		
C49			CE04NW1E100M	ELECTRO 10UF 25WV		
C50			CE04NW1C470M	ELECTRO 47UF 16WV		
C51 ,52			CK73FB1E103K	CHIP C 0.01UF K		
C53 ,54			CK73FB1H102K	CHIP C 1000PF K		
C55			CK73EF1C105Z	CHIP C 1.0UF Z		
C56			CC73FUJ1H150J	CHIP C 15PF J		
C57			CK73FB1H102K	CHIP C 1000PF K		
C58			CC73FUJ1H220J	CHIP C 22PF J		
C59 ,60			CK73FB1H102K	CHIP C 1000PF K		
C61			CE04NW1C470M	ELECTRO 47UF 16WV		
C62			CK73FB1H102K	CHIP C 1000PF K		
C63			CK73FB1E103K	CHIP C 0.01UF K		
C64			CE04NW1E100M	ELECTRO 10UF 25WV		
C65			CE04NW1A330M	ELECTRO 33UF 10WV		
C66			CK73FB1E103K	CHIP C 0.01UF K		
C67			CK73FB1H102K	CHIP C 1000PF K		
C68			CC73FCH1H100D	CHIP C 10PF D		
C69			CC73FCH1H100D	CHIP C 10PF D		
C70			CK73FB1E103K	CHIP C 0.01UF K		
C71 -73			CK73FB1H102K	CHIP C 1000PF K		
C74			CK73FB1H223K	CHIP C 0.022UF K		
C75			CE04NW1C101M	ELECTRO 100UF 16WV		
C76			CK73EF1C105Z	CHIP C 1.0UF Z		
C77 ,78			CK73FB1H102K	CHIP C 1000PF K		
C79			CK73EF1C105Z	CHIP C 1.0UF Z		

A: TM-742 K, P, M, M2, E, E2, E

B: TM-942 K, P, M

# TM-742 A/742 E/942 A

## PARTS LIST

× New Parts

Parts without Parts No. are not supplied.

Les articles non mentionnés dans le Parts No. ne sont pas fournis.

Telle ohne Parts No. werden nicht geliefert.

144M TX-RX UNIT (X57-3580-XX)

Ref. No. 参照番号	Address 位置	New Parts 新	Parts No. 部品番号	Description 部品名 / 規格	Desti- nation 仕向	Re- marks 備考
C80			CC73FCH1H050C	CHIP C 5PF C		
C81			CC45SL2H120J	CERAMIC 12PF J		
C82			CK73FB1H102K	CHIP C 1000PF K		
C83			CK45B2H102K	CERAMIC 1000PF K		
C84			CM73F2H330J	CHIP C 33PF J		
C85			CC73FCH1H220J	CHIP C 22PF J		
C86			CC73FCH1H0R5C	CHIP C 0.5PF C		
C87			CC73FCH1H020C	CHIP C 2.0PF C		
C88			CC45SL2H560J	CERAMIC 56PF J		
C89			CC45SL2H470J	CERAMIC 47PF J		
C90 -92			CK73FB1H102K	CHIP C 1000PF K		
C93			CC73FCH1H0R5C	CHIP C 0.5PF C		
C94			CM73F2H300J	CHIP C 30PF J		
C95			CC73FCH1H020C	CHIP C 2.0PF C		
C96			CK73FB1E103K	CHIP C 0.01UF K		
C98			CK73FB1H102K	CHIP C 1000PF K		
C99			CE04NW1E100M	ELECTR0 10UF 25WV		
C100			CK73FB1H102K	CHIP C 1000PF K		
C101			CE04NW1E100M	ELECTR0 10UF 25WV		
C103			CK73FB1H102K	CHIP C 1000PF K		
C104			CK73FB1E103K	CHIP C 0.01UF K		
C105			CK73FB1H223K	CHIP C 0.022UF K		
C110			CC73FCH1H030C	CHIP C 3PF C		
C111			CK73FB1E103K	CHIP C 0.01UF K		
C112			CE04NW1A221M	ELECTR0 220UF 10WV		
C113			CC73FCH1H100D	CHIP C 10PF D		
C114,115			CC73FSL1H101J	CHIP C 100PF J		
C116			CC73FCH1H080D	CHIP C 8PF D		
C119			CE04NW1E100M	ELECTR0 10UF 25WV		
C120-127			CC73FSL1H101J	CHIP C 100PF J		
C128,129			CK73FB1H102K	CHIP C 1000PF K		
C130			CE04EW1C102M	ELECTR0 1000UF 16WV		
TC1			C05-0345-05	TRIMMING CAP 10PF		
-			E22-0672-04	TERMINAL BOARD(-)		
-			E22-0673-04	TERMINAL BOARD(+)		
203	3H		E30-2145-15	ANT CABLE		
202	1H		E30-3007-05	DC POWER CORD		A
CN1 ,2			E40-5461-05	PIN CONNECTOR		
J1			E11-0442-05	PHONE JACK		B
J2			E23-0619-05	TERMINAL		B
J3			E23-0619-05	TERMINAL		A
-			F05-1531-05	FUSE		
205	2G		F10-1446-04	SHIELDING PLATE		
204	1G		F10-2010-03	SHIELDING COVER		
-			F10-2012-04	SHIELDING CASE(VCO-PLL)		
-			F20-1008-04	INSULATION SHEET(APC)		
208	1H		F51-0017-05	FUSE(15A)		A
209	3G		G02-0600-14	FLAT SPRING(THERMAL SW)		
-			G02-0705-04	FLAT SPRING		
-			G02-0715-04	LEAF SPRING(APC TR)		
-			G02-0718-04	FLAT SPRING(VCO)		
-			G09-0426-05	SPRING(DC CORD)		A
-			G11-0654-04	CUSHION(VCO)		

A: TM-742 K, P, M, M2, E, E2, E3

B: TM-942 K, P, M

# TM-742 A/742 E/942 A

## PARTS LIST

× New Parts

Parts without Parts No. are not supplied.

Les articles non mentionnés dans le Parts No. ne sont pas fournis.

Teile ohne Parts No. werden nicht geliefert.

144M TX-RX UNIT (X57-3580-XX)

Ref. No. 参照番号	Address 位置	New Parts 新	Parts No. 部品番号	Description 部品名 / 規格	Desti- nation 仕 向	Re- marks 備考
211 215 - - -	3G 3G		G11-0655-04 G11-0660-04 G11-0661-04 G13-0841-04 G13-1325-04	CUSHION(CN1,CN2) CUSHION(VCO) INSULATION SHEET(APC TR) FORMED PLATE(XTAL) FORMED PLATE(VCO)		
- 216 214 -	3G 1G		G13-1337-04 G13-1349-04 G53-0508-04  J30-0564-05	CUSHION(VCO) CUSHION(VCO) NON-WOVEN FABRIC  SPACER		
CD1 CF1 L1 -4 L5 L6			L79-1013-05 L72-0372-05 L34-4252-05 L40-1582-19 L34-4251-05	FILTER CERAMIC FILTER(CFWM455F) COIL SMALL FIXED INDUCTOR(0.15UH) COIL(1ST IF)		
L8 L10 L11 L12 L13			L34-1185-05 L40-3382-19 L34-1239-05 L34-0895-05 L34-0742-05	COIL(2.5T) SMALL FIXED INDUCTOR(0.33UH) COIL(10.5T) COIL(6T) COIL(6T)		
L14 L15 -17 L19 L20 X1			L34-0908-05 L34-0499-05 L40-8272-48 L40-1001-19 L77-1405-05	COIL(9.5T) COIL(4.5T) SMALL FIXED INDUCTOR(82NH) SMALL FIXED INDUCTOR(10UH) CRYSTAL RESONATOR(12.8MHZ)		
X2 XF1			L77-1473-05 L71-0228-05	CRYSTAL RESONATOR(10.245MHZ) CRYSTAL FILTER(10.7MHZ)		
W N U			N09-2077-05 N87-2606-46 N88-2606-46	SCREW(MODULE) BRAZIER HEAD TAPTITE SCREW(ANT FLAT HEAD TAPTITE SCREW		
R4 R5 R6 R7 R8			RK73FB2A103J RK73FB2A333J RK73FB2A274J RK73FB2A101J RK73FB2A103J	CHIP R 10K J 1/10W CHIP R 33K J 1/10W CHIP R 270K J 1/10W CHIP R 100 J 1/10W CHIP R 10K J 1/10W		
R9 R10 -12 R13 R14 R15			RK73FB2A101J RK73FB2A103J RK73FB2A473J RK73FB2A104J RK73FB2A683J	CHIP R 100 J 1/10W CHIP R 10K J 1/10W CHIP R 47K J 1/10W CHIP R 100K J 1/10W CHIP R 68K J 1/10W		
R16 R17 R18 R19 R20			RK73FB2A823J R92-0670-05 RK73FB2A470J RK73FB2A102J RK73FB2A152J	CHIP R 82K J 1/10W CHIP R 0 OHM CHIP R 47 J 1/10W CHIP R 1.0K J 1/10W CHIP R 1.5K J 1/10W		
R21 R22 R23 R24 R25			RK73FB2A471J RK73FB2A101J RK73FB2A103J RK73FB2A473J RK73FB2A103J	CHIP R 470 J 1/10W CHIP R 100 J 1/10W CHIP R 10K J 1/10W CHIP R 47K J 1/10W CHIP R 10K J 1/10W		
R30 R31 R33 ,34 R35			R92-0670-05 RK73FB2A394J R92-0670-05 RK73FB2A222J	CHIP R 0 OHM CHIP R 390K J 1/10W CHIP R 0 OHM CHIP R 2.2K J 1/10W		

A: TM-742 K, P, M, M2, E, E2, E3

B: TM-942 K, P, M

# TM-742 A/742 E/942 A

## PARTS LIST

× New Parts

Parts without Parts No. are not supplied.

Les articles non mentionnés dans le Parts No. ne sont pas fournis.

Teile ohne Parts No. werden nicht geliefert.

144M TX-RX UNIT (X57-3580-XX)

Ref. No. 参照番号	Address 位置	New Parts 新	Parts No. 部品番号	Description 部品名 / 規格	Desti- nation 仕向	Re- marks 備考
R36			RK73FB2A101J	CHIP R 100 J 1/10W		
R37			R92-0670-05	CHIP R 0 OHM		
R38			RK73FB2A182J	CHIP R 1.8K J 1/10W		
R39 -41			RK73FB2A103J	CHIP R 10K J 1/10W		
R42			RK73FB2A182J	CHIP R 1.8K J 1/10W		
R43			RK73FB2A223J	CHIP R 22K J 1/10W		
R44			RK73FB2A273J	CHIP R 27K J 1/10W		
R45			RK73FB2A473J	CHIP R 47K J 1/10W		
R46			RK73FB2A472J	CHIP R 4.7K J 1/10W		
R47			R92-0670-05	CHIP R 0 OHM		
R49			RK73FB2A223J	CHIP R 22K J 1/10W		
R50			RK73FB2A124J	CHIP R 120K J 1/10W		
R52 -54			RK73FB2A473J	CHIP R 47K J 1/10W		
R55			RK73FB2A471J	CHIP R 470 J 1/10W		
R56			RK73FB2A104J	CHIP R 100K J 1/10W		
R57			RK73FB2A105J	CHIP R 1.0M J 1/10W		
R58			RK73FB2A473J	CHIP R 47K J 1/10W		
R59			R92-0670-05	CHIP R 0 OHM		
R60			RK73FB2A103J	CHIP R 10K J 1/10W		
R61			RK73FB2A471J	CHIP R 470 J 1/10W		
R62			R92-0670-05	CHIP R 0 OHM		
R63 ,64			RK73FB2A222J	CHIP R 2.2K J 1/10W		
R65 ,66			R92-0670-05	CHIP R 0 OHM		
R67			RK73FB2A122J	CHIP R 1.2K J 1/10W		
R68			RK73FB2A220J	CHIP R 22 J 1/10W		
R69			RK73FB2A470J	CHIP R 47 J 1/10W		
R71			R92-0670-05	CHIP R 0 OHM		
R73			RK73FB2A104J	CHIP R 100K J 1/10W		
R74			R92-0670-05	CHIP R 0 OHM		
R75			RK73FB2A103J	CHIP R 10K J 1/10W		
R76			R92-0670-05	CHIP R 0 OHM		
R78			R92-1213-05	CARBON 100 J 1/2W		
R79 ,80			RK73FB2A223J	CHIP R 22K J 1/10W		
R81			RK73FB2A471J	CHIP R 470 J 1/10W		
R82			R92-0685-05	CHIP R 22 J 1/2W		
R83			R92-0670-05	CHIP R 0 OHM		
R84 -86			R92-0670-05	CHIP R 0 OHM		
R89			RK73FB2A332J	CHIP R 3.3K J 1/10W		
R90			RK73FB2A221J	CHIP R 220 J 1/10W		
R91			RK73FB2A473J	CHIP R 47K J 1/10W		
R92			R92-0679-05	CHIP R 0 OHM		
R93			RK73FB2A104J	CHIP R 100K J 1/10W		
R98 ,99			RK73FB2A103J	CHIP R 10K J 1/10W		
R101			RK73FB2A102J	CHIP R 1.0K J 1/10W		
VR1			R12-6429-05	TRIM POT. 100K		
VR2			R12-6427-05	TRIM POT. 47K		
VR3			R12-6423-05	TRIM POT. 10K		
VR4			R12-6423-05	TRIM POT. 10K		
TS1			S79-0401-05	THERMAL SWITCH(95°C)		
D1			1SV164	DIODE		
D2			1SV166	DIODE		
D3 ,4			1SV164	DIODE		
D5			1SV166	DIODE		
D6			1SV164	DIODE		

A: TM-742 K, P, M, M2, E, E2, E3

B: TM-942 K, P, M

# TM-742 A/742 E/942 A

## PARTS LIST

× New Parts

Parts without Parts No. are not supplied.

Les articles non mentionnés dans le Parts No. ne sont pas fournis.

Teile ohne Parts No. werden nicht geliefert.

144M TX-RX UNIT (X57-3580-XX)

430/440M TX-RX UNIT (X57-3590-XX)

Ref. No. 参照番号	Address 位置	New Parts 新	Parts No. 部品番号	Description 部品名 / 規格	Desti- nation 仕向	Re- marks 備考
D7 D11 D12 D13 D14			1SV166 1SS184 1SS184 DAN235(K) 1SS181	DIODE DIODE DIODE DIODE DIODE		
D15 D16 D17 , 18 D19 IC1			MI407 MI308 1SS226 OSA3A1 BU4094BF	DIODE DIODE DIODE DIODE IC(SHIFT/STORE REGISTER)		
IC1 IC2 IC5 IC6 IC7			XRU4094BF LA5010M KCD04 KCD05 KCA04	IC IC(LOW SATURATION REGULATOR) IC(FM IF) IC(AM IF) IC(MIC AMPLIFIER)		
IC8 IC9 IC10 IC11 Q1			KCB11 KCC04 S-AV17 KCH05 3SK184(S)	IC(DRIVER) IC(APC) IC(POWER MODULE FOR 144MHZ) IC(144MHZ VCO PLL) FET		
Q2 Q3 Q4 Q5 , 6 Q7			3SK131(V12) 2SC2714(Y) DTA114YK DTC123JK DTC143EK	FET TRANSISTOR DIGITAL TRANSISTOR DIGITAL TRANSISTOR DIGITAL TRANSISTOR		
Q10 Q11 Q12 Q13 , 14 Q15 -17			2SA1362(Y) 2SB1119(S) DTC144WK 2SC2712(Y) DTC144EK	TRANSISTOR TRANSISTOR DIGITAL TRANSISTOR TRANSISTOR DIGITAL TRANSISTOR		
Q18 Q19 Q20 Q21 Q22			2SD1757K 2SK208(Y) 2SC2714(Y) 2SC2712(Y) FMG1	TRANSISTOR FET TRANSISTOR TRANSISTOR TRANSISTOR		
Q23 Q24			2SD1902R 2SJ106(GR)	TRANSISTOR FET		
<b>430/440M TX-RX UNIT (X57-3590-XX) -11: K, P -21: M</b>						
200	2G		A10-1316-01	CHASSIS		
201	3G		B42-2437-04	LABEL(S/N0)		
C1 C2 -4 C5 C6 C7			CC73FCH1H030C CK73FB1H102K CC73FCH1H1R5C CC73FCH1H390J CK73FB1H102K	CHIP C 3PF C CHIP C 1000PF K CHIP C 1.5PF C CHIP C 39PF J CHIP C 1000PF K		
C8 C9 C9 C9 C10			CK73FB1H102K CC73FCH1H010C CC73FCH1H010C CC73FCH1H020C CC73FCH1H390J	CHIP C 1000PF K CHIP C 1PF C CHIP C 1PF C CHIP C 2PF C CHIP C 39PF J	MM2 EE2E3 KP	
C11 C12 C13 , 14			CK73FB1H102K CK73FB1H102K CK73FB1H102K	CHIP C 1000PF K CHIP C 1000PF K CHIP C 1000PF K		

A: TM-742 K, P, M, M2, E, E2, E3

B: TM-942 K, P, M

# TM-742 A/742 E/942 A

## PARTS LIST

× New Parts

Parts without Parts No. are not supplied.

Les articles non mentionnés dans le Parts No. ne sont pas fournis.

Teile ohne Parts No. werden nicht geliefert.

430/440M TX-RX UNIT (X57-3590-XX)

Ref. No. 参照番号	Address 位置	New Parts 新	Parts No. 部品番号	Description 部品名 / 規格	Desti- nation 仕 向	Re- marks 備考
C15 C16 ,17 C18 C19 ,20 C21			CC73FCH1H050C CK73FB1H102K CC73FCH1H060D CK73FB1H102K CC73FCH1H560J	CHIP C 5PF C CHIP C 1000PF K CHIP C 6PF D CHIP C 1000PF K CHIP C 56PF J	KP	
C21 C21 C22 C22 C22			CC73FCH1H330J CC73FCH1H330J CC73FCH1H180J CC73FCH1H330J CC73FCH1H330J	CHIP C 33PF J CHIP C 33PF J CHIP C 18PF J CHIP C 33PF J CHIP C 33PF J	MM2 EE2E3 KP MM2 EE2E3	B   B
C23 C24 C25 C26 C27			CK73FB1H102K CE04NW1C470M CK73FB1H102K CK73FF1C105Z C92-0003-05	CHIP C 1000PF K ELECTR0 47UF 16WV CHIP C 1000PF K CHIP C 1.0UF Z CHIP TAN 0.47UF 25WV		
C28 ,29 C30 C31 C32 C33			CK73FF1C105Z CK73FB1H102K CK73FB1H102K CE04NW1C470M C92-0504-05	CHIP C 1.0UF Z CHIP C 1000PF K CHIP C 1000PF K ELECTR0 47UF 16WV CHIP TAN 0.68UF 20WV		
C34 C35 C36 C37 C38			CE04NW1C470M CK73FB1H102K CE04NW1C470M CK73FB1H102K CK73FB1H822K	ELECTR0 47UF 16WV CHIP C 1000PF K ELECTR0 47UF 16WV CHIP C 1000PF K CHIP C 8200PF K		
C39 C40 C41 ,42 C43 C44			CK73FB1H102K CK73FF1C105Z CC73FUJ1H180J CK73FB1H102K CC73FCH1H060D	CHIP C 1000PF K CHIP C 1.0UF Z CHIP C 18PF J CHIP C 1000PF K CHIP C 6PF D		
C45 C46 C47 C48 C49			CK73FB1H102K CC73FCH1H150J CK73FB1H102K CE04NW1C101M CK73FB1H102K	CHIP C 1000PF K CHIP C 15PF J CHIP C 1000PF K ELECTR0 100UF 16WV CHIP C 1000PF K		
C50 C51 ,52 C53 C54 -58 C60			CE04NW1A330M CK73FB1H102K CE04NW1C101M CK73FB1H102K CE04NW1C220M	ELECTR0 33UF 10WV CHIP C 1000PF K ELECTR0 100UF 16WV CHIP C 1000PF K ELECTR0 22UF 16WV		
C62 C64 ,65 C66 C66 C66			CK73FB1H102K CK73FB1H102K CM73F2H050D CM73F2H060D CM73F2H060D	CHIP C 1000PF K CHIP C 1000PF K CHIP C 5.0PF D CHIP C 6.0PF D CHIP C 6.0PF D	KP MM2 EE2E3	B
C67 C68 C69 C70 C71			CC73FCH1H070D CC45SL2H150J CC45SL2H220J CC45SL2H220J CC73FCH1H0R5C	CHIP C 7PF D CERAMIC 15PF J CERAMIC 22PF J CERAMIC 22PF J CHIP C 0.5PF C		
C72 C73 C74 C75 C76			CC73FCH1H020C CC45SL2H080D CC45SL2H100D CC73FCH1H0R5C CC73FCH1H020C	CHIP C 2.0PF C CERAMIC 8.0PF D CERAMIC 10PF D CHIP C 0.5PF C CHIP C 2.0PF C		

A: TM-742 K, P, M, M2, E, E2, E3

B: TM-942 K, P, M



# TM-742 A/742 E/942 A

## PARTS LIST

× New Parts

Parts without Parts No. are not supplied.

Les articles non mentionnés dans le Parts No. ne sont pas fournis.

Teile ohne Parts No. werden nicht geliefert.

430/440M TX-RX UNIT (X57-3590-XX)

Ref. No. 参照番号	Address 位置	New Parts 新	Parts No. 部品番号	Description 部品名 / 規格	Desti- nation 仕 向	Re- marks 備考
C77 C78 -80 C81 C82 -85 C86			CM73F2H060D CK73FB1H102K C90-2092-05 CC73FSL1H101J CK73FB1H102K	CHIP C 6.0PF D CHIP C 1000PF K ELECTRO 10UF 16WV CHIP C 100PF J CHIP C 1000PF K		
C87 C88 C89 -91 C92 C93			CK73FB1H333K CB04NW1A221M CK73FB1H102K CK73FB1H471K CB04NW1C470M	CHIP C 0.033UF K ELECTRO 220UF 10WV CHIP C 1000PF K CHIP C 470PF K ELECTRO 47UF 16WV		
C94 C96 C97 C98 C99			CC73FCH1H030C CK73FB1H102K CK73FB1E104K CC73FCH1H040C CC73FCH1H020C	CHIP C 3PF C CHIP C 1000PF K CHIP C 0.10UF K CHIP C 4PF C CHIP C 2.0PF C		
C100 C100 C100 C102 C103,104			CC73FCH1H060D CC73FCH1H070D CC73FCH1H070D CB04NW1C100M CK73FB1H102K	CHIP C 6PF D CHIP C 7PF D CHIP C 7PF D ELECTRO 10UF 16WV CHIP C 1000PF K	KP MM2 EE2E3	B
C105-110 C111 C112 C113 C114			CC73FSL1H101J CK73FB1H103K CK73FB1H102K CC73FCH1H020C CK73FB1E223K	CHIP C 100PF J CHIP C 0.010UF K CHIP C 1000PF K CHIP C 2.0PF C CHIP C 0.022UF K		
C115 C118 C21,22 TC1,2 TC3			CK73FB1H102K CC73FCH1H150J CC73FCH1H330J C05-0346-05 C05-0371-05	CHIP C 1000PF K CHIP C 15PF J CHIP C 33PF J TRIM CAP TRIM CAP 10PF	BMM2	
- - 203 203 202	3H 3H 1H		E22-0672-04 E72-0406-04 E30-3009-15 E30-3010-15 E30-3007-05	TERMINAL BOARD(-) TERMINAL BOARD(+) ANT CABLE ANT CABLE DC CABLE	KPMM2 EE2E3	B B B
CN1,2 J1 TP1			E40-5461-05 E11-0442-05 E04-0154-05	PIN ASSY(12P) PHONE JACK RF COAXIAL CABLE RECEPTACLE		
204 205 - - 208	1G 2G   1H		F10-1444-03 F10-1446-04 F10-1477-24 F10-2012-04 F51-0017-05	SHIELDING PLATE SHIELDING PLATE SHIELDING PLATE SHIELDING CASE(VCO-PLL) FUSE(15A)		B
- 209 - - 210	3H   2G		G02-0599-04 G02-0600-14 G02-0704-04 G02-0705-04 G09-0426-05	FLAT SPRING(DB TR) FLAT SPRING(THERMAL SW) EARTH SPRING EARTH SPRING SPRING(DC CORD)		B
211 212 215 - -	3G 1G 3G  		G11-0655-04 G11-0656-14 G11-0660-04 G11-0661-04 G13-0841-04	CUSHION(CN1,CN2) CONDUCTIVE RUBBER(MCF) CUSHION(VCO) INSULATION SHEET(DB TR) CUSHION(12.8MHZ XTAL)		
216	3G		G13-1319-04	CUSHION(VCO)		

A: TM-742 K, P, M, M2, E, E2, E3

B: TM-942 K, P, M

# TM-742 A/742 E/942 A

## PARTS LIST

× New Parts

Parts without Parts No. are not supplied.

Les articles non mentionnés dans le Parts No. ne sont pas fournis.

Teile ohne Parts No. werden nicht geliefert.

430/440M TX-RX UNIT (X57-3590-XX)

Ref. No. 参照番号	Address 位置	New Parts 新	Parts No. 部品番号	Description 部品名 / 規格	Desti- nation 仕向	Re- marks 備考
213	3G		G13-1351-04	CUSHION(CN1,CN2)		
214	1G		G53-0508-04	CUSHION		
217	2H		J42-0471-04	DC CORD BUSHING		A
CD1			L79-1013-05	FILTER(455KHZ)		
CF1			L72-0372-05	CERAMIC FILTER(CFWM455F)		
L1			L40-1872-80	SMALL FIXED INDUCTOR(18NH)		
L2			L40-1572-48	SMALL FIXED INDUCTOR(15NH)		
L3			L79-1016-05	HERICAL BLOCK(440MHZ)		
L4			L79-1017-05	HERICAL BLOCK(435MHZ)	MM2	
L4			L79-1017-05	HERICAL BLOCK(435MHZ)	EE2E3	B
L4			L79-1018-05	HERICAL BLOCK(445MHZ)	KP	
L5			L40-2772-48	SMALL FIXED INDUCTOR(27NH)	KP	
L5			L40-3372-48	SMALL FIXED INDUCTOR(33NH)	MM2	
L5			L40-3372-48	SMALL FIXED INDUCTOR(33NH)	EE2E3	B
L6			L40-2272-48	SMALL FIXED INDUCTOR(22NH)		
L7			L34-4250-05	COIL		
L8			L40-2272-48	SMALL FIXED INDUCTOR(22NH)		
L9			L34-1238-05	COIL(9.5T)		
L10			L34-1185-05	COIL(2.5T)		
L11			L34-1032-05	COIL(3.5T)		
L12			L34-1226-05	COIL(1.5T)		
L13			L34-1238-05	COIL(9.5T)		
L14			L34-1226-05	COIL(1.5T)		
L15			L40-1872-48	SMALL FIXED INDUCTOR(18NH)		
L16			L40-1001-19	SMALL FIXED INDUCTOR(10UH)		
X1			L77-1445-05	CRYSTAL RESONATOR(21.145MHZ)		
X2			L77-1405-05	CRYSTAL RESONATOR(12.8MHZ)		
XF1			L71-0411-05	MCF(21.6MHZ)		
W			N09-2077-05	SCREW(MODULE)		
N			N87-2606-46	BRAZIER HEAD TAPTITE SCREW		
U			N88-2606-46	FLAT HEAD TAPTITE SCREW		
R2			RK73FB2A104J	CHIP R 100K J 1/10W		
R3			RK73FB2A333J	CHIP R 33K J 1/10W		
R4 ,5			RK73FB2A101J	CHIP R 100 J 1/10W		
R6			RK73FB2A470J	CHIP R 47 J 1/10W		
R7			RK73FB2A220J	CHIP R 22 J 1/10W		
R8			RK73FB2A471J	CHIP R 470 J 1/10W		
R10			RK73FB2A223J	CHIP R 22K J 1/10W		
R11			RK73FB2A102J	CHIP R 1.0K J 1/10W		
R14 ,15			RK73FB2A102J	CHIP R 1.0K J 1/10W		
R16			RK73FB2A221J	CHIP R 220 J 1/10W		
R18			RK73FB2A222J	CHIP R 2.2K J 1/10W		
R19			RK73FB2A470J	CHIP R 47 J 1/10W		
R20			R92-0670-05	CHIP R 0 OHM		
R21			RK73FB2A122J	CHIP R 1.2K J 1/10W		
R22			RK73FB2A334J	CHIP R 330K J 1/10W		
R24			RK73FB2A102J	CHIP R 1.0K J 1/10W		
R25			RK73FB2A471J	CHIP R 470 J 1/10W		
R26			RK73FB2A473J	CHIP R 47K J 1/10W		
R27			RK73FB2A223J	CHIP R 22K J 1/10W		
R28			RK73FB2A182J	CHIP R 1.8K J 1/10W		
R29 -31			RK73FB2A103J	CHIP R 10K J 1/10W		
R32			RK73FB2A182J	CHIP R 1.8K J 1/10W		

A: TM-742 K, P, M, M2, E, E2, E3

B: TM-942 K, P, M

# TM-742 A/742 E/942 A

## PARTS LIST

× New Parts

Parts without Parts No. are not supplied.

Les articles non mentionnés dans le Parts No. ne sont pas fournis.

Teile ohne Parts No. werden nicht geliefert.

430/440M TX-RX UNIT (X57-3590-XX)

Ref. No. 参照番号	Address 位置	New Parts 新	Parts No. 部品番号	Description 部品名 / 規格	Desti- nation 仕向	Re- marks 備考
R33 -35 R36 R37 R38 R40			RK73FB2A473J RK73FB2A154J RK73FB2A273J RK73FB2A152J RK73FB2A221J	CHIP R 47K J 1/10W CHIP R 150K J 1/10W CHIP R 27K J 1/10W CHIP R 1.5K J 1/10W CHIP R 220 J 1/10W		
R42 R43 R44 R45 ,46 R47			R92-0670-05 RK73FB2A471J RK73FB2A103J RK73FB2A222J RK73EB2B220J	CHIP R 0 OHM CHIP R 470 J 1/10W CHIP R 10K J 1/10W CHIP R 2.2K J 1/10W CHIP R 22 J 1/8W		
R48 R49 R51 R52 R53			R92-0670-05 RK73FB2A102J RK73FB2A562J RK73FB2A104J R92-0685-05	CHIP R 0 OHM CHIP R 1.0K J 1/10W CHIP R 5.6K J 1/10W CHIP R 100K J 1/10W CHIP R 22 J 1/2W		
R55 R58 R59 R60 ,61 R62			R92-0670-05 R92-0679-05 R92-1214-05 RK73FB2A103J RK73FB2A221J	CHIP R 0 OHM CHIP R 0 OHM CHIP R 120 J 1/2W CHIP R 10K J 1/10W CHIP R 220 J 1/10W		
R63 R64 R65 R66 R67 ,68			RK73FB2A473J RK73FB2A104J RK73FB2A472J RK73FB2A473J RK73FB2A103J	CHIP R 47K J 1/10W CHIP R 100K J 1/10W CHIP R 4.7K J 1/10W CHIP R 47K J 1/10W CHIP R 10K J 1/10W		
R72 VR1 VR2 VR3 ,4			RK73FB2A102J R12-6429-05 R12-6427-05 R12-6423-05	CHIP R 1K J 1/10W TRIMMING POT. 100K TRIM POT. 47K TRIM POT. 10K		
TS1			S59-0444-05	THERMAL SWITCH(90°C)		
D1 D2 D3 D4 D5			HSK277 1SV128 1SS184 MA862 1SS181	DIODE DIODE DIODE DIODE DIODE		
D6 D7 D8 D9 D10 ,11			1SS184 1SS184 MI407 MI308 MA716	DIODE DIODE DIODE DIODE DIODE		
D12 D13 D14 D15 IC1			DSA3A1 1SS184 MA716 MA862 KCD04	DIODE DIODE DIODE DIODE IC(FM IF)		
IC2 IC3 IC3 IC4 IC5			KCA04 BU4094BF XRU4094BF LA5010M KCC04	IC(MIC AMPLIFIER) IC(SHIFT/STORE REGISTER) IC IC(LOW SATURATION REGULATOR) IC(APC)		
IC6 IC7 IC8 IC9			KCB14 M57788M KCB12 KCB13	IC(DRIVER) IC(POWER MODULE/ 430-450MHZ) IC(400MHZ PRE AMPLIFIER) IC(800MHZ FRONT END)		

A: TM-742 K, P, M, M2, E, E2, E3

B: TM-942 K, P, M

# TM-742 A/742 E/942 A

## PARTS LIST

× New Parts

Parts without Parts No. are not supplied.

Les articles non mentionnés dans le Parts No. ne sont pas fournis.

Telle ohne Parts No. werden nicht geliefert.

430/440M TX-RX UNIT (X57-3590-XX)

1200M TX-RX UNIT (X57-3600-11)

Ref. No. 参照番号	Address 位置	New Parts 新	Parts No. 部品番号	Description 部品名 / 規格	Desti- nation 仕向	Re- marks 備考
IC10 Q1 Q2 Q3 Q4  Q5 Q6 ,7 Q8 Q9 Q10 ,11  Q12 Q13 -15 Q16 Q17 Q18  Q19 Q20 Q21			KCH07 3SK184(S) 2SK582 3SK184(S) DTC114EK  2SC2714(Y) FMA5 2SA1362(Y) DTC144WK 2SC2712(Y)  2SB1119(S) DTC144EK 2SD1757K 2SC2712(Y) 2SC3123  FMG1 2SD1760(Q) 2SJ106(GR)	IC(430MHZ VC0 PLL) FET FET FET DIGITAL TRANSISTOR  TRANSISTOR TRANSISTOR TRANSISTOR DIGITAL TRANSISTOR TRANSISTOR  TRANSISTOR DIGITAL TRANSISTOR TRANSISTOR TRANSISTOR TRANSISTOR  TRANSISTOR TRANSISTOR FET		
<b>1200M TX-RX UNIT (X57-3600-11)</b>						
200 201  C1 C2 -5 C7 C8 C9  C10 ,11 C12 C13 C14 C15  C17 C18 C19 C21 ,22 C23  C24 C25 C26 C27 C28  C29 C30 C31 C32 C33  C34 C35 C36 C37 C38 -41  C42 C43 ,44	2G  3G		A10-1316-01 B42-2437-04  CC73FCH1H220J CK73FB1H471K CC73FCH1H100D CC73FSL1H101J CC73FCH1H1R5B  CC73FCH1H470J CK73FB1E103K CC73FCH1H1R5B CC73FSL1H101J CK73FB1H471K  CC73FSL1H101J CC73FCH1H1R5B CE04NW1C470M CK73FB1H471K CC73FCH1H030C  CC73FCH1H1R5C CK73FB1H102K CK73FB1H471K CK73FB1E223K CC73FCH1H080D  CK73FB1E103K CC73FCH1H030C CC73FSL1H101J CC73FCH1H030C CK73FB1H471K  CK73FB1H472K CK73FB1H102K CC73FCH1H150J CC73FCH1H220J CK73FB1E103K  CE04NW1C470M CK73BF1C105Z	CHASSIS  LABEL(S/N0)  CHIP C 22PF J CHIP C 470PF K CHIP C 10PF D CHIP C 100PF J CHIP C 1.5PF B  CHIP C 47PF J CHIP C 0.01UF K CHIP C 1.5PF B CHIP C 100PF J CHIP C 470PF K  CHIP C 100PF J CHIP C 1.5PF B ELECTRO 47UF 16WV CHIP C 470PF K CHIP C 3PF C  CHIP C 1.5PF C CHIP C 1000PF K CHIP C 470PF K CHIP C 0.022UF K CHIP C 8PF D  CHIP C 0.01UF K CHIP C 3PF C CHIP C 100PF J CHIP C 3PF C CHIP C 470PF K  CHIP C 4700PF K CHIP C 1000PF K CHIP C 15PF J CHIP C 22PF J CHIP C 0.01UF K  ELECTRO 47UF 16WV CHIP C 1.0UF Z		

A: TM-742 K, P, M, M2, E, E2, E3

B: TM-942 K, P, M

# TM-742A/742E/942A

## PARTS LIST

× New Parts

Parts without Parts No. are not supplied.

Les articles non mentionnés dans le Parts No. ne sont pas fournis.

Telle ohne Parts No. werden nicht geliefert.

1200M TX-RX UNIT (X57-3600-11)

Ref. No. 参照番号	Address 位置	New Parts 新	Parts No. 部品番号	Description 部品名 / 規格	Desti- nation 仕向	Re- marks 備考
C45			C92-0002-05	CHIP TAN 0.22UF 35WV		
C46			CK73FB1E104K	CHIP C 0.10UF K		
C47			CK73FB1H471K	CHIP C 470PF K		
C48			C92-0504-05	CHIP TAN 0.68UF 20WV		
C49			C92-0004-05	ELECTRØ 1.0UF 16WV		
C50			CK73FB1E223K	CHIP C 0.022UF K		
C51			CK73EF1C105Z	CHIP C 1.0UF Z		
C52			CC73FCH1H030C	CHIP C 3PF C		
C53			CK73FB1E473K	CHIP C 0.047UF K		
C54			CE04NW1C470M	ELECTRØ 47UF 16WV		
C55			CK73EF1C105Z	CHIP C 1.0UF Z		
C56			CK73FB1E223K	CHIP C 0.022UF K		
C57			CK73FB1H471K	CHIP C 470PF K		
C58 ,59			CE04NW1C101M	ELECTRØ 100UF 16WV		
C60			CK73FB1H471K	CHIP C 470PF K		
C61			CE04NW1A330M	ELECTRØ 33UF 10WV		
C62 ,63			CK73FB1E103K	CHIP C 0.01UF K		
C64			CE04NW1C101M	ELECTRØ 100UF 16WV		
C65			CC73GCH1H030C	CHIP C 3PF C		
C66			CC73GCH1H101J	CHIP C 100PF J		
C67 ,68			CC73GCH1H020C	CHIP C 2.0PF C		
C69			CC73GCH1H101J	CHIP C 100PF J		
C70			CC73GCH1H050C	CHIP C 5PF C		
C71			CK73EF1C105Z	CHIP C 1.0UF Z		
C72			CE04NW1E100M	ELECTRØ 10UF 25WV		
C73 ,74			CK73FB1H471K	CHIP C 470PF K		
C75			CK73GB1H471K	CHIP C 470PF K		
C76			CK73FB1H471K	CHIP C 470PF K		
C77			CK73FB1E103K	CHIP C 0.01UF K		
C78 -80			CK73FB1H471K	CHIP C 470PF K		
C81			CK73EF1C105Z	CHIP C 1.0UF Z		
C82 -83			CK73FB1H471K	CHIP C 470PF K		
C84			CK73FB1H471K	CHIP C 470PF K		
C85			CE04NW1E100M	ELECTRØ 10UF 25WV		
C86			CK73EF1C105Z	CHIP C 1.0UF Z		
C87 ,88			CK73GB1H471K	CHIP C 470PF K		
C89 ,90			CK73FB1H471K	CHIP C 470PF K		
C91			CE04NW1C470M	ELECTRØ 47UF 16WV		
C92			CC73FCH1H470J	CHIP C 47PF J		
C93 ,94			CK73FB1H471K	CHIP C 470PF K		
C95			CC73FCH1H010C	CHIP C 1PF C		
C96			CC73FCH1H100D	CHIP C 10PF D		
C97			CK73FB1H471K	CHIP C 470PF K		
C98			CM73F2H470J	CHIP C 47PF J		
C99			CC73FSL1H101J	CHIP C 100PF J		
C100			CK73FB1E103K	CHIP C 0.01UF K		
C101			CC73FCH1H080D	CHIP C 8PF D		
C102-104			CK73FB1H471K	CHIP C 470PF K		
C105			CC73FCH1HR75B	CHIP C 0.75PF B		
C106			CK73FB1H471K	CHIP C 470PF K		
C107			CC73FSL1H101J	CHIP C 100PF J		
C108-110			CK73FB1H471K	CHIP C 470PF K		
C111			CC73FSL1H101J	CHIP C 100PF J		
C112			CK73FB1H471K	CHIP C 470PF K		
C113			CK73FB1H102K	CHIP C 1000PF K		

A: TM-742 K, P, M, M2, E, E2, E3

B: TM-942 K, P, M

# TM-742A/742E/942A

## PARTS LIST

× New Parts

Parts without Parts No. are not supplied.

Les articles non mentionnés dans le Parts No. ne sont pas fournis.

Teile ohne Parts No. werden nicht geliefert.

1200M TX-RX UNIT (X57-3600-11)

Ref. No. 参照番号	Address 位置	New Parts 新	Parts No. 部品番号	Description 部品名/規格	Desti- nation 仕向	Re- marks 備考
C114-116 C117 C118 C119 C120			CK73FB1H471K CK73GB1H102K CK73FB1E103K CC73FSL1H101J CC73FUJ1H221J	CHIP C 470PF K CHIP C 1000PF K CHIP C 0.01UF K CHIP C 100PF J CHIP C 220PF J		
C123-125 C126-130 C131 C132 C133			CK73FB1H471K CK73FB1H471K CK73GB1H103K CK73GB1H471K CK73FB1E103K	CHIP C 470PF K CHIP C 470PF K CHIP C 0.01UF K CHIP C 470PF K CHIP C 0.01UF K		
C134-137 C138 C139 C140 C141, 142			CK73FB1H471K CE04NWOJ470M CC73FSL1H101J CK73FB1E104K CK73FB1H471K	CHIP C 470PF K ELECTRO 47UF 6.3WV CHIP C 100PF J CHIP C 0.10UF K CHIP C 470PF K		
C144, 145 C147-156 C157 C158 C159			CC73FSL1H101J CC73GCH1H101J CK73GB1H102K CK73FB1H102K CC73FSL1H101J	CHIP C 100PF J CHIP C 100PF J CHIP C 1000PF K CHIP C 1000PF K CHIP C 100PF J		
- - - 203 CN1, 2	3H		E22-0672-04 E22-0673-04 E23-0467-05 E30-3011-05 E40-5461-05	TERMINAL BOARD(-) TERMINAL BOARD(+) TERMINAL ANT. CABLE PIN CONNECTOR(12P)		
J1			E11-0442-05	PHONE JACK		
204 - 205 - 207	3H 2G 1G		F10-1444-03 F10-1445-04 F10-1446-04 F10-1457-14 F10-1475-04	SHIELDING COVER SHIELDING(VCO) SHIELDING(MODULE) SHIELDING CASE SHIELDING COVER(MODULE)		
- - - 211 215	3G 3G		G02-0599-04 G02-0706-04 G11-0654-04 G11-0655-04 G11-0660-04	FLAT SPRING(IC) FLAT SPRING(ANT) SHEET(VCO 30X20) SHEET(CN1, CN2 55X8) SHEET(VCO 25X10)		
- - 214	1G		G11-0661-04 G13-1319-04 G53-0508-04	INSULATION SHEET FORMED PLATE NON-WEVERN FABRIC		
217	2H		J42-0471-04	DC CORD BUSHING		
CD1 CF1 L1, 2 L4 L5			L79-1013-05 L72-0366-05 L79-1015-05 L34-4259-05 L71-0280-05	FILTER CERAMIC FILTER FILTER COIL MCF		
L6 L7 L8 X1 X2			L34-2034-05 L40-3982-19 L40-5682-19 L77-1375-05 L77-1376-25	COIL(VX0) SMALL FIXED INDUCTOR(0.39UH) SMALL FIXED INDUCTOR(0.56UH) CRYSTAL RESONATOR(59.245MHZ) TCXO(12.8MHZ)		
W N U	2G		N09-2077-05 N87-2606-46 N88-2606-46	SCREW BRAZIER HEAD TAPTITE SCREW FLAT HEAD TAPTITE SCREW		

A: TM-742 K, P, M, M2, E, E2, E3

B: TM-942 K, P, M

# TM-742 A/742 E/942 A

## PARTS LIST

× New Parts

Parts without Parts No. are not supplied.

Les articles non mentionnés dans le Parts No. ne sont pas fournis.

Teile ohne Parts No. werden nicht geliefert.

1200M TX-RX UNIT (X57-3600-11)

Ref. No. 参照番号	Address 位置	New Parts 新	Parts No. 部品番号	Description 部品名 / 規格	Desti- nation 仕向	Re- marks 備考
R1 ,2			RK73FB2A222J	CHIP R 2.2K J 1/10W		
R4			RK73FB2A473J	CHIP R 47K J 1/10W		
R5			RK73GB1J473J	CHIP R 47K J 1/16W		
R6			RK73FB2A560J	CHIP R 56 J 1/10W		
R7			RK73FB2A221J	CHIP R 220 J 1/10W		
R9			RK73FB2A472J	CHIP R 4.7K J 1/10W		
R10			RK73FB2A153J	CHIP R 15K J 1/10W		
R11			RK73FB2A471J	CHIP R 470 J 1/10W		
R13			R92-0670-05	CHIP R 0 OHM		
R14			RK73GB1J180J	CHIP R 18 J 1/16W		
R15			RK73FB2A101J	CHIP R 100 J 1/10W		
R16			RK73FB2A331J	CHIP R 330 J 1/10W		
R17			RK73FB2A100J	CHIP R 10 J 1/10W		
R19			RK73FB2A151J	CHIP R 150 J 1/10W		
R20			RK73FB2A101J	CHIP R 100 J 1/10W		
R21			R92-0670-05	CHIP R 0 OHM		
R22			RK73FB2A331J	CHIP R 330 J 1/10W		
R23			RK73FB2A224J	CHIP R 220K J 1/10W		
R24			RK73FB2A561J	CHIP R 560 J 1/10W		
R25			RK73FB2A103J	CHIP R 10K J 1/10W		
R26			RK73FB2A473J	CHIP R 47K J 1/10W		
R27			RK73FB2A471J	CHIP R 470 J 1/10W		
R29			R92-0670-05	CHIP R 0 OHM		
R30			RK73FB2A221J	CHIP R 220 J 1/10W		
R31			RK73FB2A472J	CHIP R 4.7K J 1/10W		
R32			RK73FB2A222J	CHIP R 2.2K J 1/10W		
R33			RK73FB2A334J	CHIP R 330K J 1/10W		
R34			RK73FB2A223J	CHIP R 22K J 1/10W		
R35			RK73FB2A182J	CHIP R 1.8K J 1/10W		
R36 ,37			RK73FB2A103J	CHIP R 10K J 1/10W		
R38			RK73FB2A102J	CHIP R 1.0K J 1/10W		
R39 -41			RK73FB2A103J	CHIP R 10K J 1/10W		
R42			RK73FB2A474J	CHIP R 470K J 1/10W		
R43 -45			RK73GB1J472J	CHIP R 4.7K J 1/16W		
R46			RK73FB2A684J	CHIP R 680K J 1/10W		
R47			RK73FB2A823J	CHIP R 82K J 1/10W		
R48			RK73FB2A331J	CHIP R 330 J 1/10W		
R49			RK73FB2A102J	CHIP R 1.0K J 1/10W		
R50			RK73FB2A472J	CHIP R 4.7K J 1/10W		
R51			RK73FB2A102J	CHIP R 1.0K J 1/10W		
R52			RK73FB2A560J	CHIP R 56 J 1/10W		
R53			RK73GB1J271J	CHIP R 270 J 1/16W		
R54			RK73GB1J103J	CHIP R 10K J 1/16W		
R55			RK73GB1J222J	CHIP R 2.2K J 1/16W		
R56			RK73GB1J471J	CHIP R 470 J 1/16W		
R57			RK73FB2A100J	CHIP R 10 J 1/10W		
R58			RK73FB2A152J	CHIP R 1.5K J 1/10W		
R59			RK73FB2A683J	CHIP R 68K J 1/10W		
R60			R92-0670-05	CHIP R 0 OHM		
R61 ,62			RK73FB2A220J	CHIP R 22 J 1/10W		
R63			RK73GB1J472J	CHIP R 4.7K J 1/16W		
R64			RK73GB1J222J	CHIP R 2.2K J 1/16W		
R65			RK73GB1J471J	CHIP R 470 J 1/16W		
R66 ,67			RK73FB2A180J	CHIP R 18 J 1/10W		
R68			R92-0670-05	CHIP R 0 OHM		

A: TM-742 K, P, M, M2, E, E2, E3

B: TM-942 K, P, M

# TM-742 A/742 E/942 A

## PARTS LIST

× New Parts

Parts without Parts No. are not supplied.

Les articles non mentionnés dans le Parts No. ne sont pas fournis.

Teile ohne Parts No. werden nicht geliefert.

1200M TX-RX UNIT (X57-3600-11)

Ref. No. 参照番号	Address 位置	New Parts 新	Parts No. 部品番号	Description 部品名 / 規格	Desti- nation 仕向	Re- marks 備考
R69			RK73FB2A333J	CHIP R 33K J 1/10W		
R70			R92-1201-05	SILID 220 1/2W		
R71			R92-0670-05	CHIP R 0 OHM		
R72			R92-1264-05	FIXED RESISTOR		
R73			RK73FB2A472J	CHIP R 4.7K J 1/10W		
R74			R92-0700-05	CHIP R 180 1/2W		
R75			RK73FB2A470J	CHIP R 47 J 1/10W		
R76			RK73FB2A222J	CHIP R 2.2K J 1/10W		
R77			R92-0670-05	CHIP R 0 OHM		
R78			RK73GB1J271J	CHIP R 270 J 1/16W		
R79 ,80			RK73FB2A103J	CHIP R 10K J 1/10W		
R81			RK73FB2A471J	CHIP R 470 J 1/10W		
R82			R92-0670-05	CHIP R 0 OHM		
R83			RK73FB2A4R7J	CHIP R 4.7 J 1/10W		
VR1			R12-6429-05	TRIMMING POT.100K		
VR2			R12-6421-05	TRIM POT. 4.7K		
VR3			R12-6427-05	TRIM POT. 47K		
VR4			R12-6423-05	TRIM POT. 10K		
VR5			R12-6427-05	TRIM POT. 47K		
D1			MA862	DIODE		
D3			MA716	DIODE		
D4			1SS193	DIODE		
D5			02CZ6.2(X,Y)	DIODE		
D6			1SS193	DIODE		
D7			1SS187	DIODE		
D8			02CZ12(X,Y)	DIODE		
D9			HSK151	DIODE		
D10 -13			MI808	DIODE		
D14			DSA3A1	DIODE		
D15			02CZ3.6(Y,Z)	DIODE		
D17			DAP202U	DIODE		
D19			MI808	DIODE		
IC2			KCD04	IC(FM IF)		
IC3			KCX03	IC(AUTO LOCK TUNING(ALT))		
IC4			KCA04	IC(MIC AMPLIFIER)		
IC5			BU4094BF	IC(SHIFT/STORE REGISTER)		
IC5			XRU4094BF	IC(SHIFT/STORE REGISTER)		
IC6			LA5009M	IC(LOE SATURATION REGULATOR)		
IC7			KCB09	IC(1200MHZ PRE DRIVE)		
IC8			KCB10	IC(POWER AMP)		
IC9			KCC04	IC(APC)		
IC10			M67711	IC(POWER MODULE/ 1.24-1.38HZ)		
IC11			KCH03	IC(1.2GHZ VCO PLL)		
IC12			NJM78L05UA	IC(VOLTAGE REGULATOR/ +5V)		
IC12			RC78L05UA	IC		
Q1			MGF1502	IC		
Q2			2SC4095(R47.6)	TRANSISTOR		
Q3			3SK184(S)	FET		
Q6			2SC3356	TRANSISTOR		
Q7			2SC3120	TRANSISTOR		
Q8			2SA1362(Y)	TRANSISTOR		
Q9			2SB1302(S)	TRANSISTOR		
Q10			DTC144WK	DIGITAL TRANSISTOR		
Q11			FMW1	TRANSISTOR		

A: TM-742 K, P, M, M2, E, E2, E3

B: TM-942 K, P, M



# TM-742 A/742 E/942 A

## PARTS LIST

× New Parts

Parts without Parts No. are not supplied.

Les articles non mentionnés dans le Parts No. ne sont pas fournis.

Teile ohne Parts No. werden nicht geliefert.

1200M TX-RX UNIT (X57-3600-11)

Ref. No. 参照番号	Address 位置	New Parts 新	Parts No. 部品番号	Description 部品名 / 規格	Desti- nation 仕向	Re- marks 備考
Q12 ,13 Q15 -17 Q18 Q19 Q20			2SC2712(Y) DTC144EU 2SD1757(K) 2SA1362(Y) DTC124EK	TRANSISTOR DIGITAL TRANSISTOR TRANSISTOR TRANSISTOR DIGITAL TRANSISTOR		
Q21 ,22 Q23 Q24 Q25 Q26			2SC4226(R23,24) 2SC2712(Y) 2SD1760(Q) FMG1 2SJ106(GR)	TRANSISTOR TRANSISTOR TRANSISTOR TRANSISTOR FET		
Q28			DTC114EK	DIGITAL TRANSISTOR		

A: TM-742 K, P, M, M2, E, E2, E3

B: TM-942 K, P, M

# TM-742 A/742 E/942 A

## PARTS LIST

× New Parts

Parts without Parts No. are not supplied.

Les articles non mentionnés dans le Parts No. ne sont pas fournis.

Teile ohne Parts No. werden nicht geliefert.

28M TX-RX UNIT (X57-3790-01)

Ref. No. 参照番号	Address 位置	New Parts 新	Parts No. 部品番号	Description 部品名 / 規格	Desti- nation 仕向	Re- marks 備考
<b>28M TX-RX UNIT (X57-3790-01)</b>						
200	2G		A10-1325-11	CHASSIS		
201	3G		B42-2437-04	LABEL(S/NO,UNIT)		
C1			CC45SL2H181J	CERAMIC 180PF J		
C2 ,3			CC45SL2H221J	CERAMIC 220PF J		
C4			CC45SL2H271J	CERAMIC 270PF J		
C5			CC45SL2H151J	CERAMIC 150PF J		
C9			CK73GB1H103K	CHIP C 0.01UF K		
C10			CK73FB1E103K	CHIP C 0.01UF K		
C11 ,12			CK73GB1H103K	CHIP C 0.01UF K		
C13			CK73FB1E103K	CHIP C 0.01UF K		
C14 ,15			CK73GB1H103K	CHIP C 0.01UF K		
C16			CK73FB1E103K	CHIP C 0.01UF K		
C17			CC73GCH1H220J	CHIP C 22PF J		
C18			CK73GB1H103K	CHIP C 0.01UF K		
C19			CC73FCH1H030C	CHIP C 3PF C		
C20			CK73GB1H103K	CHIP C 0.01UF K		
C21 -24			CK73FB1E103K	CHIP C 0.01UF K		
C25			CC73FSL1H101J	CHIP C 100PF J		
C26			CK73FB1E103K	CHIP C 0.01UF K		
C28			CE04NW1C470M	ELECTR0 47UF 16WV		
C29			CK73GB1H103K	CHIP C 0.01UF K		
C30 ,31			CK73EF1C105Z	CHIP C 1.0UF Z		
C32			C92-0003-05	CHIP TAN 0.47UF 25WV		
C33			CK73FB1E104K	CHIP C 0.10UF K		
C34			C92-0504-05	CHIP TAN 0.68UF 20WV		
C35			CE04NW1C470M	ELECTR0 47UF 16WV		
C36			CK73FB1E103K	CHIP C 0.01UF K		
C37			CC73GCH1H330J	CHIP C 33PF J		
C38			CE04NW1C470M	ELECTR0 47UF 16WV		
C39			CK73FB1E103K	CHIP C 0.01UF K		
C40			C92-0004-05	ELECTR0 1.0UF 16WV		
C41			CK73FB1E103K	CHIP C 0.01UF K		
C42			CE04NW1E100M	ELECTR0 10UF 25WV		
C43 ,44			CK73FB1E103K	CHIP C 0.01UF K		
C45			CK73FB1E103K	CHIP C 0.01UF K		
C46			CE04NW1C470M	ELECTR0 47UF 16WV		
C47			CK73FB1E103K	CHIP C 0.01UF K		
C48			CK73FB1H822K	CHIP C 8200PF K		
C49			CK73FB1H102K	CHIP C 1000PF K		
C50			CC73FCH1H270J	CHIP C 27PF J		
C51			CC73FUJ1H100D	CHIP C 10PF D		
C52			CK73EF1C105Z	CHIP C 1.0UF Z		
C53			CK73FB1E103K	CHIP C 0.01UF K		
C54			CK73FB1H102K	CHIP C 1000PF K		
C55 -57			CK73FB1E103K	CHIP C 0.01UF K		
C58			CE04NW1E100M	ELECTR0 10UF 25WV		
C59			CE04NW1A330M	ELECTR0 33UF 10WV		
C60			CK73FB1E103K	CHIP C 0.01UF K		
C61			CE04NW1A221M	ELECTR0 220UF 10WV		
C62			CC73FCH1H030C	CHIP C 3PF C		
C63			CK73FB1E103K	CHIP C 0.01UF K		
C64			CK73FB1E103K	CHIP C 0.01UF K		

A: TM-742 K, P, M, M2, E, E2, E3

B: TM-942 K, P, M

# TM-742 A/742 E/942 A

## PARTS LIST

× New Parts

Parts without Parts No. are not supplied.

Les articles non mentionnés dans le Parts No. ne sont pas fournis.

Teile ohne Parts No. werden nicht geliefert.

28M TX-RX UNIT (X57-3790-01)

Ref. No. 参照番号	Address 位置	New Parts 新	Parts No. 部品番号	Description 部品名 / 規格	Desti- nation 仕向	Re- marks 備考
C65			CC73FCH1H180J	CHIP C 18PF J		
C66			CK73FB1E103K	CHIP C 0.01UF K		
C67			CE04NW1C101M	ELECTRO 100UF 16WV		
C68 ,69			CK73FB1E103K	CHIP C 0.01UF K		
C70			CK73FB1H223K	CHIP C 0.022UF K		
C71			CK73FB1E103K	CHIP C 0.01UF K		
C72			CK73EF1C105Z	CHIP C 1.0UF Z		
C73			CE04NW1E100M	ELECTRO 10UF 25WV		
C74			CK73FB1E103K	CHIP C 0.01UF K		
C75			CK73EF1C105Z	CHIP C 1.0UF Z		
C76			CK73FB1H223K	CHIP C 0.022UF K		
C77			CK73FB1E103K	CHIP C 0.01UF K		
C79 ,80			CK73FB1E103K	CHIP C 0.01UF K		
C81			CK73FB1H102K	CHIP C 1000PF K		
C82			CE04NW1E330M	ELECTRO 33UF 25WV		
C83			CK73FB1E103K	CHIP C 0.01UF K		
C84			CM73F2H102J	CHIP C 1000PF J		
C85			CM73F2H271J	CHIP C 270PF J		
C86			C93-0509-05	CERAMIC 6800PF		
C87			CC73FCH1H330J	CHIP C 33PF J		
C88			C93-0509-05	CERAMIC 6800PF		
C89			CK73FB1E103K	CHIP C 0.01UF K		
C90			CC73FCH1H040C	CHIP C 4PF C		
C91			CC73FCH1H0R5C	CHIP C 0.5PF C		
C92 -96			CK73FB1E103K	CHIP C 0.01UF K		
C97			CC73FCH1H080C	CHIP C 8.0PF C		
C98			CC73FSL1H101J	CHIP C 100PF J		
C99			CC73FCH1H820J	CHIP C 82PF J		
C100			CK73FB1E103K	CHIP C 0.01UF K		
C101			CC73FCH1H0R5C	CHIP C 0.5PF C		
C102-111			CC73FSL1H101J	CHIP C 100PF J		
C112,113			CK73FB1E103K	CHIP C 0.01UF K		
C114			CK73GB1H103K	CHIP C 0.01UF K		
C115			CK73FB1E103K	CHIP C 0.01UF K		
C116			CK73FB1E103K	CHIP C 0.01UF K		
C117			CK73FB1H102K	CHIP C 1000PF K		
C118			CE04NW1E100M	ELECTRO 10UF 25WV		
C119			CK73FB1E103K	CHIP C 0.01UF K		
C120			CC73GCH1H680J	CHIP C 68PF J		
C121			CC73GCH1H151J	CHIP C 150PF J		
C122,123			CC73GCH1H151J	CHIP C 150PF J		
C124,125			CK73FB1E103K	CHIP C 0.01UF K		
C126			CK73GB1H102K	CHIP C 1000PF K		
C127			CK73FB1E103K	CHIP C 0.01UF K		
C129			CC73FCH1H560J	CHIP C 56PF J		
C133			CC73FCH1H680J	CHIP C 68PF J		
C137			CC73FCH1H040C	CHIP C 4PF C		
C138			CC73GCH1H181J	CHIP C 180PF J		
TC1			C05-0345-05	TRIMMING CAP 10PF		
-						
203	3H		E22-0673-04	TERMINAL BOARD(+)		
CN1 ,2			E30-3009-15	ANT CABLE		
J1			E40-5461-05	PIN ASSY(12P)		
TP2			E11-0442-05	PHONE JACK		
			E23-0465-05	TERMINAL(TP)		

A: TM-742 K, P, M, M2, E, E2, E3

B: TM-942 K, P, M

# TM-742 A/742 E/942 A

## PARTS LIST

× New Parts

Parts without Parts No. are not supplied.

Les articles non mentionnés dans le Parts No. ne sont pas fournis.

Telle ohne Parts No. werden nicht geliefert.

28M TX-RX UNIT (X57-3790-01)

Ref. No. 参照番号	Address 位置	New Parts 新	Parts No. 部品番号	Description 部品名 / 規格	Desti- nation 仕向	Re- marks 備考
205	2H		F10-2006-14	SHIELDING PLATE(FINAL)		
-			F10-2009-04	SHIELDING PLATE(L TYPE)		
204	1G		F10-2010-03	SHIELDING COVER		
-			F10-2012-04	SHIELDING CASE (VC0-PLL)		
-			F12-0421-04	CONDUCTIVE SHEET(25.4X43)		
-			F12-0422-04	CONDUCTIVE SHEET(25.4X15)		
-			F20-1008-04	INSULATING BOARD(APC )		
-			F20-1090-04	INSULATING BOARD(60X22)		
209	3G		G02-0600-14	FLAT SPRING(THERMAL SWITCH)		
-			G02-0715-04	FLAT SPRING(APC TR)		
-			G02-0718-04	FLAT SPRING(VC0)		
-			G02-0720-04	FLAT SPRING(FRONT)		
211	3G		G11-0655-04	CONDUCTIVE RUBBER(CN1,CN1 55X8)		
-			G11-0661-04	INSULATING SHEET(APC TR)		
-			G13-0841-04	CUSHION(XTAL)		
-			G13-1319-04	CUSHION(VC0)		
216	3G		G13-1337-04	CUSHION(VC0)		
206	2H		J30-0583-14	SPACER(FINAL)		
217	2H		J42-0471-04	DC CORD BUSHING		
CD1			L79-1013-05	FILTER		
CF1			L72-0372-05	CERAMIC FILTER(CFWM455F)		
L1			L34-4283-05	COIL(7.5T)		
L2	-4		L34-4284-05	COIL(10.5T)		
L5			L34-4285-05	COIL(1ST IF)		
L6			L40-6891-19	SMALL FIXED INDUCTOR(6.8UH)		
L7			L40-1001-19	SMALL FIXED INDUCTOR(10UH)		
L8			L34-1355-05	COIL(10.5T)		
L9			L40-6882-19	SMALL FIXED INDUCTOR(0.68UH)		
L10			L40-3982-19	SMALL FIXED INDUCTOR(0.39UH)		
L11			L34-1361-05	COIL(4.5T)		
L12			L34-1354-05	COIL(8.5T)		
L13			L34-1352-05	COIL(8T)		
L14			L34-1363-05	COIL(2T)		
L15			L34-1351-05	COIL(7T)		
L16			L34-1364-05	COIL		
L17			L34-1356-05	COIL		
L18			L34-1355-05	COIL		
L19			L33-0741-05	CHOKE COIL		
L20 ,21			L34-1355-05	COIL(10.5T)		
L22 ,23			L40-5691-19	SMALL FIXED INDUCTOR(5.6UH)		
L24			L40-3982-19	SMALL FIXED INDUCTOR(0.39UH)		
L25			L40-1001-19	SMALL FIXED INDUCTOR(10UH)		
L27			L40-1892-19	SMALL FIXED INDUCTOR(1.8UH)		
X1			L77-1465-05	CRYSTAL RESONATOR(9.285MHZ)		
XF1			L71-0422-05	CRYSTAL FILTER(8.83MHZ)		
T	1H		N09-2179-05	SCREW( ×3 )		
N	2H,3G,3H		N87-2606-46	BRAZIER HEAD TAPTITE SCREW		
O	2H		N87-2608-46	BRAZIER HEAD TAPTITE SCREW		
U	1G,1H		N88-2606-46	FLAT HEAD TAPTITE SCREW		
R1			RK73FB2A472J	CHIP R 4.7K J 1/10W		
R2			RK73FB2A103J	CHIP R 10K J 1/10W		
R3			RK73FB2A472J	CHIP R 4.7K J 1/10W		
R4			RK73FB2A680J	CHIP R 68 J 1/10W		

A: TM-742 K, P, M, M2, E, E2, E3

B: TM-942 K, P, M

# TM-742 A/742 E/942 A

## PARTS LIST

× New Parts

Parts without Parts No. are not supplied.

Les articles non mentionnés dans le Parts No. ne sont pas fournis.

Teile ohne Parts No. werden nicht geliefert.

28M TX-RX UNIT (X57-3790-01)

Ref. No. 参照番号	Address 位置	New Parts 新	Parts No. 部品番号	Description 部品名 / 規格	Desti- nation 仕向	Re- marks 備考
R5			RK73FB2A271J	CHIP R 270 J 1/10W		
R6			RK73FB2A680J	CHIP R 68 J 1/10W		
R7 ,8			RK73GB1J104J	CHIP R 100K J 1/16W		
R9			RK73GB1J682J	CHIP R 6.8K J 1/16W		
R10			RK73GB1J154J	CHIP R 150K J 1/16W		
R11			RK73GB1J470J	CHIP R 47 J 1/16W		
R12			RK73GB1J103J	CHIP R 10K J 1/16W		
R13 -15			RK73GB1J104J	CHIP R 100K J 1/16W		
R16			RK73GB1J100J	CHIP R 10 J 1/16W		
R17			RK73FB2A101J	CHIP R 100 J 1/10W		
R18			RK73FB2A473J	CHIP R 47K J 1/10W		
R19 ,20			RK73FB2A102J	CHIP R 1.0K J 1/10W		
R21			RK73FB2A223J	CHIP R 22K J 1/10W		
R22			RK73GB1J152J	CHIP R 1.5K J 1/16W		
R23			RK73FB2A101J	CHIP R 100 J 1/10W		
R24			RK73FB2A472J	CHIP R 4.7K J 1/10W		
R25			RK73FB2A391J	CHIP R 390 J 1/10W		
R26			RK73FB2A563J	CHIP R 56K J 1/10W		
R27			RK73FB2A223J	CHIP R 22K J 1/10W		
R28			RK73FB2A331J	CHIP R 330 J 1/10W		
R29			RK73FB2A334J	CHIP R 330K J 1/10W		
R30			RK73FB2A222J	CHIP R 2.2K J 1/10W		
R31			RK73FB2A274J	CHIP R 270K J 1/10W		
R32			RK73FB2A101J	CHIP R 100 J 1/10W		
R33			RK73FB2A221J	CHIP R 220 J 1/10W		
R34			RK73FB2A103J	CHIP R 10K J 1/10W		
R35			RK73FB2A104J	CHIP R 100K J 1/10W		
R36			RK73FB2A473J	CHIP R 47K J 1/10W		
R37			RK73FB2A471J	CHIP R 470 J 1/10W		
R38 ,39			RK73FB2A472J	CHIP R 4.7K J 1/10W		
R40			RK73FB2A103J	CHIP R 10K J 1/10W		
R41			RK73FB2A474J	CHIP R 470K J 1/10W		
R42			RK73FB2A103J	CHIP R 10K J 1/10W		
R43			RK73FB2A223J	CHIP R 22K J 1/10W		
R44			RK73FB2A273J	CHIP R 27K J 1/10W		
R45			RK73FB2A182J	CHIP R 1.8K J 1/10W		
R46 -48			RK73FB2A103J	CHIP R 10K J 1/10W		
R49			RK73FB2A182J	CHIP R 1.8K J 1/10W		
R50			RK73FB2A184J	CHIP R 180K J 1/10W		
R51			RK73FB2A223J	CHIP R 22K J 1/10W		
R52			RK73FB2A103J	CHIP R 10K J 1/10W		
R53			RK73FB2A223J	CHIP R 22K J 1/10W		
R54 ,55			RK73FB2A102J	CHIP R 1.0K J 1/10W		
R56 -58			RK73FB2A473J	CHIP R 47K J 1/10W		
R60			RK73FB2A471J	CHIP R 470 J 1/10W		
R61			RK73FB2A105J	CHIP R 1.0M J 1/10W		
R62			RK73FB2A104J	CHIP R 100K J 1/10W		
R63			RK73FB2A103J	CHIP R 10K J 1/10W		
R64 ,65			RK73FB2A222J	CHIP R 2.2K J 1/10W		
R66			RK73FB2A102J	CHIP R 1.0K J 1/10W		
R67			RK73FB2A122J	CHIP R 1.2K J 1/10W		
R68			RK73FB2A220J	CHIP R 22 J 1/10W		
R69			R92-0670-05	CHIP R 0 OHM		
R70			RK73FB2A104J	CHIP R 100K J 1/10W		
R72			RK73FB2A221J	CHIP R 220 J 1/10W		

A: TM-742 K, P, M, M2, E, E2, E3

B: TM-942 K, P, M

# TM-742 A/742 E/942 A

## PARTS LIST

× New Parts

Parts without Parts No. are not supplied.

Les articles non mentionnés dans le Parts No. ne sont pas fournis.

Teile ohne Parts No. werden nicht geliefert.

28M TX-RX UNIT (X57-3790-01)

Ref. No. 参照番号	Address 位置	New Parts 新	Parts No. 部品番号	Description 部品名 / 規格	Desti- nation 仕向	Re- marks 備考
R73			RK73FB2A220J	CHIP R 22 J 1/10W		
R74			RK73FB2A221J	CHIP R 220 J 1/10W		
R75			RK73FB2A470J	CHIP R 47 J 1/10W		
R77			R92-1213-05	CARBON 100 J 1/2W		
R78 , 79			RK73FB2A223J	CHIP R 22K J 1/10W		
R80			R92-0699-05	SOLID 10 1/2W		
R81			RK73FB2A103J	CHIP R 10K J 1/10W		
R82			RK73GB1J222J	CHIP R 2.2K J 1/16W		
R83			RK73FB2A471J	CHIP R 470 J 1/10W		
R84			R92-1215-05	CHIP R 470 J 1/2W		
R85			RK73FB2A123J	CHIP R 12K J 1/10W		
R88			RK73FB2A102J	CHIP R 1.0K J 1/10W		
R89 -92			R92-1252-05	CHIP R 0 OHM		
R93 , 94			R92-0670-05	CHIP R 0 OHM		
R95			R92-0679-05	CHIP R 0 OHM		
R96 -98			R92-0670-05	CHIP R 0 OHM		
R99			R92-1217-05	CHIP R 0		
R100-103			R92-0670-05	CHIP R 0 OHM		
R104			RK73FB2A472J	CHIP R 4.7K J 1/10W		
R105, 106			R92-0670-05	CHIP R 0 OHM		
R108			RK73FB2A681J	CHIP R 680 J 1/10W		
R111			R92-0670-05	CHIP R 0 OHM		
R115, 116			R92-0670-05	CHIP R 0 OHM		
VR1			R12-6429-05	TRIMMING POT. 100K		
VR2			R12-6427-05	TRIM POT. 47K		
VR3			R12-6421-05	TRIM POT. 4.7K		
VR4			R12-6423-05	TRIM POT. 10K		
TS1			S79-0401-05	THERMAL SWITCH(95°C)		
D1 , 2			MA77	DIODE		
D3 -6			1SV228	DIODE		
D7			DAN235(K)	DIODE		
D8			1SS184	DIODE		
D9			DAN235(K)	DIODE		
D10			1SS181	DIODE		
D11			UM9401	DIODE		
D12			MI308	DIODE		
D13 , 14			1SS226	DIODE		
D15			DSA3A1	DIODE		
D16 , 17			1SS184	DIODE		
IC1			BU4094BF	IC(SHIFT/STORE REGISTER)		
IC1			XRU4094BF	IC		
IC2			KCH09	IC(28MHZ PLL)PLL		
IC3			KCA04	IC(MIC AMPLIFIER)		
IC4			KCB16	IC(DRIVE AMP (28-30MHZ))		
IC5			KCC04	IC(APC)		
IC6			KCD04	IC(FM IF)		
IC7			LA5009M	IC(LOE SATURATION REGULATOR)		
IC8			KCB17	IC(PRE AMP(50M BAND))		
IC9			KCD05	IC(AM IF)		
Q1			3SK179(L)	FET		
Q2			3SK131(V12)	FET		
Q3			2SC2714(Y)	TRANSISTOR		
Q4 , 5			DTC144EU	DIGITAL TRANSISTOR		

A: TM-742 K, P, M, M2, E, E2, E3

B: TM-942 K, P, M

# TM-742 A/742 E/942 A

## PARTS LIST

× New Parts

Parts without Parts No. are not supplied.

Les articles non mentionnés dans le Parts No. ne sont pas fournis.

Teile ohne Parts No. werden nicht geliefert.

28M TX-RX UNIT (X57-3790-01)

28 SUB UNIT (X58-3840-01)

50 TX-RX UNIT (X57-3800-01)

Ref. No. 参照番号	Address 位置	New Parts 新	Parts No. 部品番号	Description 部品名 / 規格	Desti- nation 仕 向	Re- marks 備考
Q6 ,7 Q8 Q9 Q10 Q11			DTA114EK 2SC2714(Y) 2SJ106(GR) 2SA1362(Y) 2SB1119(S)	DIGITAL TRANSISTOR TRANSISTOR FET TRANSISTOR TRANSISTOR		
Q12 Q13 Q14 Q15 -17 Q18			DTC144WK FMW1 2SC2712(Y) DTC144EK 2SD1757(K)	DIGITAL TRANSISTOR TRANSISTOR TRANSISTOR DIGITAL TRANSISTOR TRANSISTOR		
Q19 Q20 Q21 Q22 Q23			2SK208(Y) 2SC2714(Y) 2SC2712(Y) FMG1 2SD1902R	FET TRANSISTOR TRANSISTOR TRANSISTOR TRANSISTOR		
Q24 Q25 Q26 Q27			2SC2712(Y) DTA114EK DTC143EK DTC144EK	TRANSISTOR DIGITAL TRANSISTOR DIGITAL TRANSISTOR DIGITAL TRANSISTOR		
Z1			X58-3840-01	SUB UNIT(28MHZ 50W)		
<b>28 SUB UNIT (X58-3840-01)</b>						
C201 C202,203 C204			CC73FCH1H471J CK73FB1H152K CM73F2H241J	CHIP C 390PF J CHIP C 1500PF K CHIP C 240PF J	SUB28 SUB28 SUB28	
L201 L202			L34-1357-05 L40-1001-19	COIL (2T) SMALL FIXED INDUCTOR(10UH)	SUB28 SUB28	
R201			R92-0686-05	CHIP R 33 J 1/2W	SUB28	
Q201 Q202			2SC1971 2SC3240	TRANSISTOR TRANSISTOR	SUB28 SUB28	
<b>50 TX-RX UNIT (X57-3800-01)</b>						
200	2G		A10-1325-11	CHASSIS		
201	3G		B42-2437-04	LABEL(S/NO,UNIT))		
C1 C2 C3 C4 C5			CC45SL2H750J CC45SL2H560J CC45SL2H680J CC45SL2H101J CC45SL2H680J	CERAMIC 75PF J CERAMIC 56PF J CERAMIC 68PF J CERAMIC 100PF J CERAMIC 68PF J		
C6 C7 C8 C9 C10			CC45SL2H120J CC45SL2H150J CC45SL2H030C CK73GB1H103K CK73FB1E103K	CERAMIC 12PF J CERAMIC 15PF J CERAMIC 3.0PF C CHIP C 0.01UF K CHIP C 0.01UF K		
C11 ,12 C13 C14 ,15 C16 C17			CK73GB1H103K CK73FB1E103K CK73GB1H103K CK73FB1E103K CC73GCH1H120J	CHIP C 0.01UF K CHIP C 0.01UF K CHIP C 0.01UF K CHIP C 0.01UF K CHIP C 12PF J		
C18 C19 C20 C21 -24			CK73GB1H103K CC73FCH1H060D CK73GB1H103K CK73FB1E103K	CHIP C 0.01UF K CHIP C 6PF D CHIP C 0.01UF K CHIP C 0.01UF K		

A: TM-742 K, P, M, M2, E, E2, E3

B: TM-942 K, P, M

# TM-742 A/742 E/942 A

## PARTS LIST

× New Parts

Parts without Parts No. are not supplied.

Les articles non mentionnés dans le Parts No. ne sont pas fournis.

Teile ohne Parts No. werden nicht geliefert.

50 TX-RX UNIT (X57-3800-01)

Ref. No. 参照番号	Address 位置	New Parts 新	Parts No. 部品番号	Description 部品名 / 規格	Desti- nation 仕向	Re- marks 備考
C25			CK73FB1H102K	CHIP C 1000PF K		
C26			CK73FB1E103K	CHIP C 0.01UF K		
C27			CC73FCH1H040C	CHIP C 4PF C		
C28			CE04NW1C470M	ELECTR0 47UF 16WV		
C29			CK73GB1H103K	CHIP C 0.01UF K		
C30 ,31			CK73EF1C105Z	CHIP C 1.0UF Z		
C32			C92-0003-05	CHIP TAN 0.47UF 25WV		
C33			CK73FB1E104K	CHIP C 0.10UF K		
C34			C92-0504-05	CHIP TAN 0.68UF 20WV		
C35			CE04NW1C470M	ELECTR0 47UF 16WV		
C36			CK73FB1E103K	CHIP C 0.01UF K		
C37			CC73GCH1H100D	CHIP C 10PF D		
C38			CE04NW1C470M	ELECTR0 47UF 16WV		
C39			CK73FB1E103K	CHIP C 0.01UF K		
C40			C92-0004-05	ELECTR0 1.0UF 16WV		
C41			CK73FB1E103K	CHIP C 0.01UF K		
C42			CE04NW1E100M	ELECTR0 10UF 25WV		
C43 ,44			CK73FB1E103K	CHIP C 0.01UF K		
C45			CK73FB1E103K	CHIP C 0.01UF K		
C46			CE04NW1C470M	ELECTR0 47UF 16WV		
C47 -49			CK73FB1E103K	CHIP C 0.01UF K		
C50			CC73FCH1H270J	CHIP C 27PF J		
C51			CC73FCH1H120J	CHIP C 12PF J		
C52			CK73EF1C105Z	CHIP C 1.0UF Z		
C53			CK73FB1E103K	CHIP C 0.01UF K		
C54			CK73FB1H102K	CHIP C 1000PF K		
C55 -57			CK73FB1E103K	CHIP C 0.01UF K		
C58			CE04NW1E100M	ELECTR0 10UF 25WV		
C59			CE04NW1A330M	ELECTR0 33UF 10WV		
C60			CK73FB1E103K	CHIP C 0.01UF K		
C61			CE04NW1A221M	ELECTR0 220UF 10WV		
C62			CC73FCH1H100D	CHIP C 10PF D		
C63 ,64			CK73FB1E103K	CHIP C 0.01UF K		
C65			CC73FCH1H150J	CHIP C 15PF J		
C66			CK73FB1E103K	CHIP C 0.01UF K		
C67			CE04NW1C101M	ELECTR0 100UF 16WV		
C68 ,69			CK73FB1E103K	CHIP C 0.01UF K		
C70			CK73FB1E223K	CHIP C 0.022UF K		
C71			CK73FB1E103K	CHIP C 0.01UF K		
C72			CK73EF1C105Z	CHIP C 1.0UF Z		
C73			CE04NW1E100M	ELECTR0 10UF 25WV		
C74			CK73FB1E103K	CHIP C 0.01UF K		
C75			CK73EF1C105Z	CHIP C 1.0UF Z		
C76			CK73FB1E223K	CHIP C 0.022UF K		
C77			CK73FB1H681K	CHIP C 680PF K		
C78			CC73FCH1H221J	CHIP C 220PF J		
C79 ,80			CK73FB1E103K	CHIP C 0.01UF K		
C81			CK73FB1H102K	CHIP C 1000PF K		
C82			CE04NW1E330M	ELECTR0 33UF 25WV		
C83			CK73FB1E103K	CHIP C 0.01UF K		
C84			CM73F2H391J	CHIP C 390PF J		
C85			CM73F2H820J	CHIP C 82PF J		
C86			C93-0509-05	CERAMIC 0.0068UF J		
C87			CC73FCH1H390J	CHIP C 39PF J		
C88			C93-0509-05	CERAMIC 0.0068UF J		

A: TM-742 K, P, M, M2, E, E2, E3

B: TM-942 K, P, M



# TM-742 A/742 E/942 A

## PARTS LIST

× New Parts

Parts without Parts No. are not supplied.

Les articles non mentionnés dans le Parts No. ne sont pas fournis.

Teile ohne Parts No. werden nicht geliefert.

50 TX-RX UNIT (X57-3800-01)

Ref. No. 参照番号	Address 位置	New Parts 新	Parts No. 部品番号	Description 部品名 / 規格	Desti- nation 仕向	Re- marks 備考
C89			CK73FB1E103K	CHIP C 0.01UF K		
C90			CC73FCH1H020C	CHIP C 2.0PF C		
C91			CC73FCH1H0R5C	CHIP C 0.5PF C		
C92 -96			CK73FB1E103K	CHIP C 0.01UF K		
C97			CC73FCH1H020C	CHIP C 2.0PF C		
C98 ,99			CC73FCH1H390J	CHIP C 39PF J		
C100			CK73FB1E103K	CHIP C 0.01UF K		
C101			CC73FCH1H0R5C	CHIP C 0.5PF C		
C102-111			CC73FSL1H101J	CHIP C 100PF J		
C112-113			CK73FB1E103K	CHIP C 0.01UF K		
C114			CK73GB1H103K	CHIP C 0.01UF K		
C115,116			CK73FB1E103K	CHIP C 0.01UF K		
C117			CK73FB1H102K	CHIP C 1000PF K		
C118			CE04NW1E100M	ELECTRO 10UF 25WV		
C119			CK73FB1E103K	CHIP C 0.01UF K		
C124,125			CK73FB1E103K	CHIP C 0.01UF K		
C126			CK73GB1H102K	CHIP C 1000PF K		
C127			CK73FB1E103K	CHIP C 0.01UF K		
C128			CC73GCH1H270J	CHIP C 27PF J		
C130,131			CC73FCH1H1R5C	CHIP C 1.5PF C		
C132			CC73FCH1H150J	CHIP C 15PF J		
C133			CC73FCH1H560J	CHIP C 56PF J		
C134			CC73GCH1H050C	CHIP C 5PF C		
C135			CC73FSL1H101J	CHIP C 100PF J		
C136			CK73FB1E104K	CHIP C 0.10UF K		
C138			CC73GCH1H151J	CHIP C 150PF J		
C139,140			CC73FCH1H470J	CHIP C 47PF J		
TC1			C05-0345-05	TRIMMING CAP.10PF		
-			E22-0673-04	TERMINAL(+)		
203	3H		E30-3009-15	ANT CABLE		
CN1 ,2			E40-5461-05	PIN ASSY(12P)		
J1			E11-0442-05	PHONE JACK		
TP2			E23-0465-05	TERMINAL(TP))		
205	2H		F10-2006-14	SHIELDING PLATE(FINAL)		
-			F10-2009-04	SHIELDING PLATE(L TYPE)		
204	1G		F10-2010-03	SHIELDING COVER		
-			F10-2012-04	SHIELDING CASE(VCO-PLL)		
-			F20-1008-04	INSULATING SHEET(APC)		
-			F20-1090-04	INSULATING SHEET(60X22)		
209	3G		G02-0600-14	FLAT SPRING(THERMAL SWITCH)		
-			G02-0705-04	FLAT SPRING(BPF COIL)		
-			G02-0715-04	FLAT SPRING(APC TR)		
-			G02-0718-04	FLAT SPLING(VCO)		
211	3G		G11-0655-04	CONDUCTIVE RUBBER(CN1,CN2 55X8)		
-			G11-0661-04	INSULATING SHEET(APC TR)		
-			G13-0841-04	CUSHION(XTAL)		
-			G13-1319-04	CUSHION(VCO 22X15)		
216	3G		G13-1337-04	CUSHION(BPF COIL,VCO)		
214	1G		G53-0508-04	PACKING		
206	2H		J30-0583-14	SPACER(FINAL)		
217	2H		J42-0471-04	DC CORD BUSHING		
CD1			L79-1013-05	FILTER		
CF1			L72-0372-05	CERAMIC FILTER(CPWM455F)		

A: TM-742 K, P, M, M2, E, E2, E3

B: TM-942 K, P, M

# TM-742 A/742 E/942 A

## PARTS LIST

× New Parts

Parts without Parts No. are not supplied.

Les articles non mentionnés dans le Parts No. ne sont pas fournis.

Teile ohne Parts No. werden nicht geliefert.

50 TX-RX UNIT (X57-3800-01)

Ref. No. 参照番号	Address 位置	New Parts 新	Parts No. 部品番号	Description 部品名 / 規格	Desti- nation 仕向	Re- marks 備考
L1			L34-4281-05	COIL(YELLOW)		
L2	-4		L34-4283-05	COIL(WHITE)		
L5			L34-4251-05	COIL(1ST IF)		
L6			L40-1582-19	SMALL FIXED INDUCTOR(0.15UH)		
L7			L40-1001-19	SMALL FIXED INDUCTOR(10UH)		
L8			L34-1347-05	COIL (6.5T)		
L9			L40-4782-19	SMALL FIXED INDUCTOR(0.47UH)		
L10			L40-1882-19	SMALL FIXED INDUCTOR(0.18UH)		
L11			L34-1344-05	COIL (2.5T)		
L12			L34-1354-05	COIL (8.5T)		
L13			L34-1352-05	COIL (8T)		
L14			L34-1345-05	COIL (1T)		
L15			L34-1346-05	COIL (4T)		
L16			L34-1364-05	COIL (20.5T)		
L17			L34-1349-05	COIL (5.5T)		
L18			L34-1348-05	COIL (5.5T)		
L19			L33-0742-05	SMALL FIXED INDUCTOR(10UH)		
L20	, 21		L34-1347-05	COIL (6.5T)		
L25			L40-1001-19	SMALL FIXED INDUCTOR(10UH)		
L26			L40-1582-19	SMALL FIXED INDUCTOR(0.15UH)		
L27			L40-1592-19	SMALL FIXED INDUCTOR(0.15UH)		
L28			L40-2282-19	SMALL FIXED INDUCTOR(0.22UH)		
X1		*	L77-1464-15	CRYSTAL RESONATOR(11.05MHZ)		
XF1			L71-0421-05	CRYSTAL FILTER(10.595MHZ)		
T			N09-2179-05	SCREW (X3)		
N			N87-2606-46	BRAZIER HEAD TAPTITE SCREW		
O			N87-2608-46	BRAZIER HEAD TAPTITE SCREW		
U			N88-2606-46	FLAT HEAD TAPTITE SCREW		
R1			RK73FB2A472J	CHIP R 4.7K J 1/10W		
R2			RK73FB2A103J	CHIP R 10K J 1/10W		
R3			RK73FB2A472J	CHIP R 4.7K J 1/10W		
R4			RK73FB2A680J	CHIP R 68 J 1/10W		
R5			RK73FB2A271J	CHIP R 270 J 1/10W		
R6			RK73FB2A680J	CHIP R 68 J 1/10W		
R7	, 8		RK73GB1J104J	CHIP R 100K J 1/16W		
R9			RK73GB1J562J	CHIP R 5.6K J 1/16W		
R10			RK73GB1J154J	CHIP R 150K J 1/16W		
R11			RK73GB1J101J	CHIP R 100 J 1/16W		
R12			RK73GB1J103J	CHIP R 10K J 1/16W		
R13	-15		RK73GB1J104J	CHIP R 100K J 1/16W		
R16			RK73GB1J100J	CHIP R 10 J 1/16W		
R17			RK73FB2A101J	CHIP R 100 J 1/10W		
R18			RK73FB2A473J	CHIP R 47K J 1/10W		
R19	, 20		RK73FB2A102J	CHIP R 1.0K J 1/10W		
R21			RK73FB2A223J	CHIP R 22K J 1/10W		
R22			RK73GB1J152J	CHIP R 1.5K J 1/16W		
R23			RK73FB2A101J	CHIP R 100 J 1/10W		
R24			RK73FB2A152J	CHIP R 1.5K J 1/10W		
R25			RK73FB2A391J	CHIP R 390 J 1/10W		
R26			RK73FB2A563J	CHIP R 56K J 1/10W		
R27			RK73FB2A223J	CHIP R 22K J 1/10W		
R28			RK73FB2A331J	CHIP R 330 J 1/10W		
R30			RK73FB2A222J	CHIP R 2.2K J 1/10W		
R31			RK73FB2A274J	CHIP R 270K J 1/10W		

A: TM-742 K, P, M, M2, E, E2, E3

B: TM-942 K, P, M

# TM-742 A/742 E/942 A

## PARTS LIST

× New Parts

Parts without Parts No. are not supplied.

Les articles non mentionnés dans le Parts No. ne sont pas fournis.

Teile ohne Parts No. werden nicht geliefert.

50 TX-RX UNIT (X57-3800-01)

Ref. No. 参照番号	Address 位置	New Parts 新	Parts No. 部品番号	Description 部品名 / 規格	Desti- nation 仕向	Re- marks 備考
R32			RK73FB2A101J	CHIP R 100 J 1/10W		
R33			RK73FB2A221J	CHIP R 220 J 1/10W		
R34			RK73FB2A103J	CHIP R 10K J 1/10W		
R35			RK73FB2A334J	CHIP R 330K J 1/10W		
R36			RK73FB2A473J	CHIP R 47K J 1/10W		
R37			RK73FB2A471J	CHIP R 470 J 1/10W		
R38			RK73FB2A472J	CHIP R 4.7K J 1/10W		
R40			RK73FB2A103J	CHIP R 10K J 1/10W		
R41			RK73FB2A474J	CHIP R 470K J 1/10W		
R42			RK73FB2A103J	CHIP R 10K J 1/10W		
R43			RK73FB2A223J	CHIP R 22K J 1/10W		
R44			RK73FB2A273J	CHIP R 27K J 1/10W		
R45			RK73FB2A182J	CHIP R 1.8K J 1/10W		
R46 -48			RK73FB2A103J	CHIP R 10K J 1/10W		
R49			RK73FB2A182J	CHIP R 1.8K J 1/10W		
R50			RK73FB2A154J	CHIP R 150K J 1/10W		
R51			RK73FB2A223J	CHIP R 22K J 1/10W		
R52			RK73FB2A103J	CHIP R 10K J 1/10W		
R53			RK73FB2A223J	CHIP R 22K J 1/10W		
R54 ,55			RK73FB2A102J	CHIP R 1.0K J 1/10W		
R56 -58			RK73FB2A473J	CHIP R 47K J 1/10W		
R59 ,60			RK73FB2A470J	CHIP R 47 J 1/10W		
R61			RK73FB2A105J	CHIP R 1.0M J 1/10W		
R62			RK73FB2A472J	CHIP R 4.7K J 1/10W		
R63			RK73FB2A183J	CHIP R 18K J 1/10W		
R64 ,65			RK73FB2A222J	CHIP R 2.2K J 1/10W		
R66			RK73FB2A102J	CHIP R 1.0K J 1/10W		
R67			RK73FB2A122J	CHIP R 1.2K J 1/10W		
R68			RK73FB2A220J	CHIP R 22 J 1/10W		
R69			R92-0670-05	CHIP R 0 OHM		
R70			RK73FB2A104J	CHIP R 100K J 1/10W		
R72			RK73FB2A471J	CHIP R 470 J 1/10W		
R73			RK73FB2A120J	CHIP R 12 2 A		
R74			RK73FB2A471J	CHIP R 470 J 1/10W		
R75			RK73FB2A470J	CHIP R 47 J 1/10W		
R76			RK73FB2A472J	CHIP R 4.7K J 1/10W		
R77			R92-1213-05	CARBON 100 J 1/2W		
R78 ,79			RK73FB2A223J	CHIP R 22K J 1/10W		
R80			R92-0685-05	CHIP R 22 J 1/2W		
R81			RK73FB2A222J	CHIP R 2.2K J 1/10W		
R82			RK73GB1J332J	CHIP R 3.3K J 1/16W		
R83			RK73FB2A471J	CHIP R 470 J 1/10W		
R84			R92-1215-05	CHIP R 470 J 1/2W		
R86			R92-1252-05	CHIP R 0 OHM		
R88			RK73FB2A102J	CHIP R 1.0K J 1/10W		
R90			RK73GB1J105J	CHIP R 1.0M J 1/16W		
R93 ,94			R92-0670-05	CHIP R 0 OHM		
R95			R92-0679-05	CHIP R 0 OHM		
R96 -98			R92-0670-05	CHIP R 0 OHM		
R99			R92-1217-05	CHIP R 0		
R100-103			R92-0670-05	CHIP R 0 OHM		
R104			RK73FB2A472J	CHIP R 4.7K J 1/10W		
R105,106			R92-0670-05	CHIP R 0 OHM		
R108			RK73FB2A102J	CHIP R 1.0K J 1/10W		
R109			RK73GB1J473J	CHIP R 47K J 1/16W		

A: TM-742 K, P, M, M2, E, E2, E3

B: TM-942 K, P, M

# TM-742 A/742 E/942 A

## PARTS LIST

× New Parts

Parts without Parts No. are not supplied.

Les articles non mentionnés dans le Parts No. ne sont pas fournis.

Teile ohne Parts No. werden nicht geliefert.

50 TX-RX UNIT (X57-3800-01)

Ref. No. 参照番号	Address 位置	New Parts 新	Parts No. 部品番号	Description 部品名 / 規格	Desti- nation 仕向	Re- marks 備考
R110			RK73FB2A221J	CHIP R 220 J 1/10W		
R111			R92-0670-05	CHIP R 0 OHM		
R112-114			R92-1252-05	CHIP R 0 OHM		
VR1			R12-6429-05	TRIM POT. 100K		
VR2			R12-6427-05	TRIM POT. 47K		
VR3			R12-6421-05	TRIM POT. 4.7K		
VR4			R12-6423-05	TRIM POT. 10K		
TS1			S59-0444-05	THERMAL SWITCH(90°C)		
D1 ,2			MA77	DIODE		
D3 -6			1SV228	DIODE		
D7			DAN235(K)	DIODE		
D8			1SS184	DIODE		
D9			DAN235(K)	DIODE		
D10			1SS181	DIODE		
D11			MI407	DIODE		
D12			MI308	DIODE		
D13 ,14			1SS226	DIODE		
D15			DSA3A1	DIODE		
D16 ,17			1SS184	DIODE		
IC1			BU4094BF	IC(SHIFT/STORE REGISTER)		
IC1			XRU4094BF	IC		
IC2			KCH10	IC(50MHZ PLL)PLL		
IC3			KCA04	IC(MIC AMPLIFIER)		
IC4			KCB18	IC(DRIVE AMP (50M BAND))		
IC5			KCC04	IC(APC)		
IC6			KCD04	IC(FM IF)DET)		
IC7			LA5010M	IC(LOW SATURATION REGULATOR)		
IC8			KCB19	IC(PRE AMP) FRONT)		
IC9			KCD05	IC(AM IF)		
Q1			3SK184(S)	FET		
Q2			3SK131(V12)	FET		
Q3			2SC2714(Y)	TRANSISTOR		
Q4			DTC144EK	DIGITAL TRANSISTOR		
Q5			DTC144EU	DIGITAL TRANSISTOR		
Q6 ,7			DTA114EK	DIGITAL TRANSISTOR		
Q8			2SC2714(Y)	TRANSISTOR		
Q9			2SJ106(GR)	FET		
Q10			2SA1362(Y)	TRANSISTOR		
Q11			2SB1119(S)	TRANSISTOR		
Q12			DTC144WK	DIGITAL TRANSISTOR		
Q13			FMW1	TRANSISTOR		
Q14			2SC2712(Y)	TRANSISTOR		
Q15 -17			DTC144EK	DIGITAL TRANSISTOR		
Q18			2SD1757K	TRANSISTOR		
Q19			2SK208(Y)	FET		
Q20			2SC2714(Y)	TRANSISTOR		
Q21			2SC2712(Y)	TRANSISTOR		
Q22			FMG1	TRANSISTOR		
Q23			2SD1902R	TRANSISTOR		
Q24			2SC2712(Y)	TRANSISTOR		
Q25			DTA114EK	DIGITAL TRANSISTOR		
Q26			DTC143EK	DIGITAL TRANSISTOR		
Z1			X58-3840-03	SUB UNIT(50M 50W)		

A: TM-742 K, P, M, M2, E, E2, E3

B: TM-942 K, P, M

## PARTS LIST

× New Parts

Parts without Parts No. are not supplied.

Les articles non mentionnés dans le Parts No. ne sont pas fournis.

Teile ohne Parts No. werden nicht geliefert.

50 SUB UNIT (X58-3840-03)  
220M TX-RX UNIT (X57-3810-10)

Ref. No. 参照番号	Address 位置	New Parts 新	Parts No. 部品番号	Description 部品名 / 規格	Desti- nation 仕向	Re- marks 備考
<b>50 SUB UNIT (X58-3840-03)</b>						
C201			CC73FCH1H391J	CHIP C 390PF J	SUB50	
C202			CC73FCH1H221J	CHIP C 220PF J	SUB50	
C203			CK73FB1H471K	CHIP C 470PF K	SUB50	
C204			CM73F2H910J	CHIP C 91PF J	SUB50	
L201			L34-1357-05	COIL (2T)	SUB50	
L202			L40-1001-19	SMALL FIXED INDUCTOR(10UH)	SUB50	
Q201			2SC1972	TRANSISTOR	SUB50	
Q202			MRF492	TRANSISTOR	SUB50	
<b>220M TX-RX UNIT (X57-3810-10)</b>						
200	2G		A10-1316-11	CHASSIS		
201	3G		B42-2437-04	LABEL(S/NO,UNIT)		
C5			CC73FCH1H030C	CHIP C 3PF C		
C7 -9			CK73FB1H102K	CHIP C 1000PF K		
C10			CK73FB1E103K	CHIP C 0.01UF K		
C11			CC73FCH1H0R5C	CHIP C 0.5PF C		
C12			CC73FCH1H560J	CHIP C 56PF J		
C14			CC73FCH1H0R5C	CHIP C 0.5PF C		
C15			CC73FCH1H120J	CHIP C 12PF J		
C17			CC73FCH1H120J	CHIP C 12PF J		
C18			CK73FB1H102K	CHIP C 1000PF K		
C19			CC73FCH1H060D	CHIP C 6PF D		
C20			CK73FB1H102K	CHIP C 1000PF K		
C21			CC73FCH1H060D	CHIP C 6PF D		
C22			CK73FB1E103K	CHIP C 0.01UF K		
C24			CK73FB1E103K	CHIP C 0.01UF K		
C25			CC45SL2H030C	CERAMIC 3.0PF C		
C26			CK73FB1H102K	CHIP C 1000PF K		
C29			CK73FB1E103K	CHIP C 0.01UF K		
C30			CC73FCH1H150J	CHIP C 15PF J		
C31			CK73FB1H102K	CHIP C 1000PF K		
C33			CK73FB1E104K	CHIP C 0.10UF K		
C34 ,35			CK73BF1C105Z	CHIP C 1.0UF Z		
C36 ,37			CK73FB1E103K	CHIP C 0.01UF K		
C44 ,45			CE04NW1C470M	ELECTRO 47UF 16WV		
C46			C92-0504-05	CHIP TAN 0.68UF 20WV		
C47			CE04NW1C470M	ELECTRO 47UF 16WV		
C48			C92-0003-05	CHIP TAN 0.47UF 25WV		
C50			CE04NW1C470M	ELECTRO 47UF 16WV		
C51 ,52			CK73FB1E103K	CHIP C 0.01UF K		
C53 ,54			CK73FB1H102K	CHIP C 1000PF K		
C55			CK73BF1C105Z	CHIP C 1.0UF Z		
C56			CC73FUJ1H150J	CHIP C 15PF J		
C57			CK73FB1H102K	CHIP C 1000PF K		
C58			CC73FUJ1H200J	CHIP C 20PF J		
C59 ,60			CK73FB1H102K	CHIP C 1000PF K		
C61			CE04NW1C470M	ELECTRO 47UF 16WV		
C62			CK73FB1H102K	CHIP C 1000PF K		
C63			CK73FB1E103K	CHIP C 0.01UF K		
C64			CE04NW1E100M	ELECTRO 10UF 25WV		
C65			CE04NW1A330M	ELECTRO 33UF 10WV		
C66			CK73FB1E103K	CHIP C 0.01UF K		

A: TM-742 K, P, M, M2, E, E2, E3  
B: TM-942 K, P, M

# TM-742 A/742 E/942 A

## PARTS LIST

\* New Parts

Parts without Parts No. are not supplied.

Les articles non mentionnés dans le Parts No. ne sont pas fournis.

Teile ohne Parts No. werden nicht geliefert.

220M TX-RX UNIT (X57-3810-10)

Ref. No. 参照番号	Address 位置	New Parts 新	Parts No. 部品番号	Description 部品名 / 規格	Desti- nation 仕向	Re- marks 備考
C67 C68 ,69 C70 C71 -73 C74			CK73FB1H102K CC73FCH1H100D CK73FB1E103K CK73FB1H102K CK73FB1H223K	CHIP C 1000PF K CHIP C 10PF D CHIP C 0.01UF K CHIP C 1000PF K CHIP C 0.022UF K		
C75 C76 C77 ,78 C79 C81			CE04NW1C101M CK73EF1C105Z CK73FB1H102K CK73EF1C105Z CC45SL2H180J	ELECTR0 100UF 16WV CHIP C 1.0UF Z CHIP C 1000PF K CHIP C 1.0UF Z CERAMIC 18PF J		
C82 C83 C84 C85 C86			CK73FB1H102K CK45B2H102K CC45SL2H040C CC73FCH1HOR5C CC73FCH1HOR5C	CHIP C 1000PF K CERAMIC 1000PF K CERAMIC 4.0PF C CHIP C 0.5PF C CHIP C 0.5PF C		
C87 C88 C89 C90 -92 C93			CC73FCH1H020C CC45SL2H220J CC45SL2H180J CK73FB1H102K CC73FCH1HOR5C	CHIP C 2.0PF C CERAMIC 22PF J CERAMIC 18PF J CHIP C 1000PF K CHIP C 0.5PF C		
C94 C95 C96 C97 C98			CM73P2H050D CC73FCH1H020C CK73FB1E103K CC73FCH1H150J CK73FB1H102K	CHIP C 5.0PF D CHIP C 2.0PF C CHIP C 0.01UF K CHIP C 15PF J CHIP C 1000PF K		
C99 C100 C101 C102 C103			CE04NW1E100M CC73FCH1H010C CE04NW1E100M CC73FCH1H470J CK73FB1H102K	ELECTR0 10UF 25WV CHIP C 1PF C ELECTR0 10UF 25WV CHIP C 47PF J CHIP C 1000PF K		
C104 C105 C106 C108 C109,110			CK73FB1E103K CK73FB1H223K CC73FCH1H470J CC73FCH1H390J CK73FB1H102K	CHIP C 0.01UF K CHIP C 0.022UF K CHIP C 47PF J CHIP C 39PF J CHIP C 1000PF K		
C111 C112 C113 C114,115 C116			CK73FB1E103K CE04NW1A221M CC73FSL1H100D CC73FSL1H101J CC73FCH1H060D	CHIP C 0.01UF K ELECTR0 220UF 10WV CHIP C 10PF D CHIP C 100PF J CHIP C 6PF D		
C119 C120-127 C128,129 C130 C131			CE04NW1E100M CC73FSL1H101J CK73FB1H102K CE04EW1C102M CC73FCH1H070D	ELECTR0 10UF 25WV CHIP C 100PF J CHIP C 1000PF K ELECTR0 1000UF 16WV CHIP C 7PF D		
C133 C134 C135-137 C140 TC1			CC73FCH1H100D CK73FB1E103K CK73FB1H102K CC73FCH1H010C C05-0371-05	CHIP C 10PF D CHIP C 0.01UF K CHIP C 1000PF K CHIP C 1PF C TRIM CAP 10PF		
203 - CN1 ,2 J1 J2	3H		E30-3009-15 E72-0406-04 E40-5461-05 E11-0442-05 E23-0619-05	ANT CABLE TERMINAL BOARD( + ) PIN ASSY(12P) PHONE JACK TERMINAL(TP)		

A: TM-742 K, P, M, M2, E, E2, E3  
B: TM-942 K, P, M

# TM-742 A/742 E/942 A

## PARTS LIST

× New Parts

Parts without Parts No. are not supplied.

Les articles non mentionnés dans le Parts No. ne sont pas fournis.

Telle ohne Parts No. werden nicht geliefert.

220M TX-RX UNIT (X57-3810-10)

Ref. No. 参照番号	Address 位置	New Parts 新	Parts No. 部品番号	Description 部品名 / 規格	Desti- nation 仕向	Re- marks 備考
205	2G		F10-1446-04	SHIELDING PLATE		
204	1G		F10-2010-03	SHIELDING COVER		
-			F10-2012-04	SHIELDING CASE (VCO-PLL)		
-			F20-1008-04	INSULATING SHEET(APC)		
209	3G		G02-0600-14	FLAT SPRING(THERMAL SWITCH)		
-			G02-0705-04	FLAT SPRING		
-			G02-0715-04	FLAT SPRING(APC TR)		
-			G02-0718-04	FLAT SPRING(VCO )		
211	3G		G11-0655-04	SHEET(CN1,CN2 55X8)		
212	1G		G11-0656-14	CONDUCTIVE RUBBER		
-			G11-0661-04	INSULATING SHEET(APC TR)		
-			G13-0841-04	CUSHION(XTAL)		
-			G13-1337-04	CUSHION(VCO)		
216	3G		G13-1349-04	CUSHION(VCO 22X7)		
213	3G		G13-1351-04	CUSHION(55X8)		
217	2H		J42-0471-04	DC CORD BUSHING		
CD1			L79-1013-05	FILTER		
CF1			L72-0372-05	CERAMIC FILTER(CFWM455F)		
L1 -4			L34-4279-05	COIL(1ST IF)		
L5			L40-1082-19	SMALL FIXED INDUCTOR(0.1UH)		
L6			L34-4280-05	COIL		
L10			L40-1582-19	SMALL FIXED INDUCTOR(0.15UH)		
L11			L34-1239-05	COIL		
L12			L34-1207-05	COIL		
L13			L34-1208-05	COIL		
L14			L34-0908-05	COIL		
L15 ,16			L34-0641-05	COIL		
L19			L40-8272-48	SMALL FIXED INDUCTOR(82NH)		
L20			L40-1001-19	SMALL FIXED INDUCTOR(10UH)		
L21			L40-1092-19	SMALL FIXED INDUCTOR(1UH)		
L22			L40-3372-48	SMALL FIXED INDUCTOR(33NH)		
X1			L77-1405-05	CRYSTAL RESONATOR(12.8MHZ)		
X2			L77-1463-05	CRYSTAL RESONATOR(30.37MHZ)		
XF1			L71-0420-05	CRYSTAL FILTER(30.825MHZ)		
W			N09-2077-05	SCREW(MODULE)		
N			N87-2606-46	BRAZIER HEAD TAPTITE SCREW		
U			N88-2606-46	FLAT HEAD TAPTITE SCREW		
R5			RK73FB2A333J	CHIP R 33K J 1/10W		
R6			RK73FB2A104J	CHIP R 100K J 1/10W		
R7			RK73FB2A101J	CHIP R 100 J 1/10W		
R8			RK73FB2A103J	CHIP R 10K J 1/10W		
R9			RK73FB2A101J	CHIP R 100 J 1/10W		
R10 -12			RK73FB2A104J	CHIP R 100K J 1/10W		
R13			RK73FB2A473J	CHIP R 47K J 1/10W		
R14			RK73FB2A103J	CHIP R 10K J 1/10W		
R16			RK73FB2A151J	CHIP R 150 J 1/10W		
R19			R92-0670-05	CHIP R 0 OHM		
R20			RK73FB2A122J	CHIP R 1.2K J 1/10W		
R21			RK73FB2A471J	CHIP R 470 J 1/10W		
R22			RK73FB2A101J	CHIP R 100 J 1/10W		
R23			RK73FB2A103J	CHIP R 10K J 1/10W		
R24			RK73FB2A473J	CHIP R 47K J 1/10W		

A: TM-742 K, P, M, M2, E, E2, E3

B: TM-942 K, P, M

# TM-742 A/742 E/942 A

## PARTS LIST

× New Parts

Parts without Parts No. are not supplied.

Les articles non mentionnés dans le Parts No. ne sont pas fournis.

Telle ohne Parts No. werden nicht geliefert.

220M TX-RX UNIT (X57-3810-10)

Ref. No. 参照番号	Address 位置	New Parts 新	Parts No. 部品番号	Description 部品名 / 規格	Desti- nation 仕向	Re- marks 備考
R25			RK73FB2A103J	CHIP R 10K J 1/10W		
R31			RK73FB2A394J	CHIP R 390K J 1/10W		
R32			RK73FB2A103J	CHIP R 10K J 1/10W		
R33 , 34			R92-0670-05	CHIP R 0 OHM		
R35			RK73FB2A222J	CHIP R 2.2K J 1/10W		
R36			RK73FB2A101J	CHIP R 100 J 1/10W		
R37			R92-0670-05	CHIP R 0 OHM		
R38			RK73FB2A182J	CHIP R 1.8K J 1/10W		
R39 -41			RK73FB2A103J	CHIP R 10K J 1/10W		
R42			RK73FB2A182J	CHIP R 1.8K J 1/10W		
R43			RK73FB2A223J	CHIP R 22K J 1/10W		
R44			RK73FB2A273J	CHIP R 27K J 1/10W		
R45			RK73FB2A473J	CHIP R 47K J 1/10W		
R46			RK73FB2A472J	CHIP R 4.7K J 1/10W		
R47			R92-0670-05	CHIP R 0 OHM		
R49			RK73FB2A223J	CHIP R 22K J 1/10W		
R50			RK73FB2A124J	CHIP R 120K J 1/10W		
R52 -54			RK73FB2A473J	CHIP R 47K J 1/10W		
R55			RK73FB2A471J	CHIP R 470 J 1/10W		
R56			RK73FB2A104J	CHIP R 100K J 1/10W		
R57			RK73FB2A105J	CHIP R 1.0M J 1/10W		
R59			R92-0670-05	CHIP R 0 OHM		
R60			RK73FB2A103J	CHIP R 10K J 1/10W		
R61			RK73FB2A471J	CHIP R 470 J 1/10W		
R62			R92-0670-05	CHIP R 0 OHM		
R63 , 64			RK73FB2A222J	CHIP R 2.2K J 1/10W		
R65 , 66			R92-0670-05	CHIP R 0 OHM		
R67			RK73FB2A122J	CHIP R 1.2K J 1/10W		
R68			RK73FB2A220J	CHIP R 22 J 1/10W		
R69			RK73FB2A102J	CHIP R 1.0K J 1/10W		
R71			R92-0670-05	CHIP R 0 OHM		
R73			RK73FB2A104J	CHIP R 100K J 1/10W		
R74			R92-0679-05	CHIP R 0 OHM		
R75			RK73FB2A392J	CHIP R 3.9K J 1/10W		
R76 , 77			R92-0670-05	CHIP R 0 OHM		
R78			R92-1213-05	CARBON 100 J 1/2W		
R79 , 80			RK73FB2A223J	CHIP R 22K J 1/10W		
R81			RK73FB2A471J	CHIP R 470 J 1/10W		
R82			R92-0699-05	SOLID 10 1/2W		
R83 -86			R92-0670-05	CHIP R 0 OHM		
R89			RK73FB2A332J	CHIP R 3.3K J 1/10W		
R90			RK73FB2A221J	CHIP R 220 J 1/10W		
R91			RK73FB2A473J	CHIP R 47K J 1/10W		
R92 , 93			RK73FB2A104J	CHIP R 100K J 1/10W		
R98			RK73FB2A223J	CHIP R 22K J 1/10W		
R99			RK73FB2A103J	CHIP R 10K J 1/10W		
R100			R92-0670-05	CHIP R 0 OHM		
R101			RK73FB2A102J	CHIP R 1.0K J 1/10W		
VR1			R12-6429-05	TRIMMING POT. 100K		
VR2			R12-6427-05	TRIM POT. 47K		
VR3 , 4			R12-6423-05	TRIM POT. 10K		
TS1			S79-0401-05	THERMAL SWITCH(95°C)		
D3			1SV164	DIODE		

A: TM-742 K, P, M, M2, E, E2, E3

B: TM-942 K, P, M



## PARTS LIST

× New Parts

Parts without Parts No. are not supplied.

Les articles non mentionnés dans le Parts No. ne sont pas fournis.

Teile ohne Parts No. werden nicht geliefert.

220M TX-RX UNIT (X57-3810-10)

UT-28S

Ref. No. 参照番号	Address 位置	New Parts 新	Parts No. 部品番号	Description 部品名 / 規格	Desti- nation 仕向	Re- marks 備考
D5 D7 D11 ,12 D13 D14			1SV164 1SV164 1SS184 DAN235(K) 1SS181	DIODE DIODE DIODE DIODE DIODE		
D15 D16 D17 ,18 D19 D20			MI407 MI308 1SS226 DSA3A1 1SV164	DIODE DIODE DIODE DIODE DIODE		
IC1 IC1 IC2 IC5 IC7			BU4094BF XRU4094BF LA5009M KCD04 KCA04	IC(SHIFT/STORE REGISTER) IC IC(LOE SATURATION REGULATOR) IC(FM IF) IC(MIC AMPLIFIER)		
IC8 IC9 IC10 IC11 Q1 ,2			KCB15 KCC04 M57774 KCH08 3SK184(S)	IC(DRIVE AMP (220M BAND)) IC(APC) IC(POWER MODULE/220-225MHZ) IC(220 PLL-VC0) FET		
Q3 Q10 Q11 Q12 Q13 ,14			2SC2714(Y) 2SA1362(Y) 2SB1119S DTC144WK 2SC2712(Y)	TRANSISTOR TRANSISTOR TRANSISTOR DIGITAL TRANSISTOR TRANSISTOR		
Q15 -17 Q18 Q19 Q20 Q21			DTC144EK 2SD1757(K) 2SK208(Y) 2SC2714(Y) 2SC2712(Y)	DIGITAL TRANSISTOR TRANSISTOR FET TRANSISTOR TRANSISTOR		
Q22 Q23 Q24			FMG1 2SD1902R 2SJ106(GR)	TRANSISTOR TRANSISTOR FET		
UT-28S						
300 303 305 309 311	1U 1T 1T 2U 1T		B41-0686-04 B42-2437-04 B42-2454-04 B42-3488-04 B62-0089-10	CAUTION LABEL(ADJUST) LABEL(S/NO,UNIT) LABEL(S/NO,ITEM CARTON BOX) LABEL(FREQUENCY) INSTRUCTION MANUAL		
313	2U		E23-0657-04	TERMINAL		
315	1U		G11-0665-04	SHEET(FAN CABLE)		
317 320 322 324 326	2T,1U 1T 2U 1T,1U 2T		H10-2726-03 H13-0855-04 H25-0029-04 H25-0760-04 H52-0130-04	POLYSTYRENE FOAMED FIXTURE PROTECTION BOARD PROTECTION BAG(60X110) PROTECTION BAG(200X350) ITEM CARTON BOX		
328	3T		H62-0110-04	OUTER PACKING CASE		
330	1U		J69-0325-05	W RING		
335	1U		N99-0355-15	SCREW SET		
340	1U,2T		X57-3790-01	TX-RX UNIT(28MHZ 50W)		

A: TM-742 K, P, M, M2, E, E2, E3

B: TM-942 K, P, M

# TM-742 A/742 E/942 A

## PARTS LIST

× New Parts

Parts without Parts No. are not supplied.

Les articles non mentionnés dans le Parts No. ne sont pas fournis.

Telle ohne Parts No. werden nicht geliefert.

UT-50S

UT-220S

UT-1200

Ref. No. 参照番号	Address 位置	New Parts 新	Parts No. 部品番号	Description 部品名 / 規格	Desti- nation 仕向	Re- marks 備考
<b>UT-50S</b>						
300	1U		B41-0686-04	CAUTION LABEL(ADJUST)		
303	1T		B42-2437-04	LABEL(S/NO,UNIT)		
305	1T		B42-2454-04	LABEL(S/NO,ITEM CARTON BOX)		
309	2U		B42-3488-04	LABEL(FREQUENCY)		
311	1T		B62-0089-10	INSTRUCTION MANUAL		
313	2U		E23-0657-04	TERMINAL		
315	1U		G11-0665-04	SHEET(FAN CABLE)		
317	1U, 2T		H10-2726-03	POLYSTYRENE FOAMED FIXTURE		
320	1T		H13-0855-04	PROTECTION BOARD		
322	2U		H25-0029-04	PROTECTION BAG(60X10)		
324	1T, 1U		H25-0760-04	PROTECTION BAG(200X350)		
326	2T		H52-0133-04	ITEM CARTON BOX		
328	3T		H62-0113-04	OUTER CARTON BOX		
330	1U		J69-0325-05	Ø RING		
335	1U		N99-0355-15	SCREW SET		
340	1U, 2T		X57-3800-01	TX-RX UNIT(50M 50W)		
<b>UT-220S</b>						
300	1U		B41-0686-04	CAUTION LABEL(ADJUST)		
303	1T		B42-2437-04	LABEL(S/NO,UNIT)		
305	3T		B42-2454-04	LABEL(S/NO,ITEM CARTON BOX)		
309	2U		B42-3488-04	LABEL(FREQUENCY)		
311	1T		B62-0089-10	INSTRUCTION MANUAL		
313	2U		E23-0657-04	TERMINAL		
315	1U		G11-0665-04	SHEET(FAN CABLE)		
317	1U, 2T		H10-2726-03	POLYSTYRENE FOAMED FIXTURE		
320	1T		H13-0855-04	PROTECTION BOARD		
322	2U		H25-0029-04	PROTECTION BAG(60X110)		
324	1T, 1U		H25-0760-04	PROTECTION BAG(200X350)		
326	2T		H52-0136-04	ITEM CARTON BOX		
328	3T		H62-0116-04	OUTER PACKING CASE		
330	1U		J69-0325-05	Ø RING		
335	1U		N99-0355-15	SCREW SET		
340	1U, 2T		X57-3810-10	TX-RXUNIT(220MHZ 25W)		
<b>UT-1200</b>						
300	1U		B41-0686-04	CAUTION LABEL(ADJUST)		
303	1T		B42-2437-04	LABEL(S/NO)		
305	1T		B42-2454-04	LABEL(S/NO,ITEM CARTON BOX)		
309	2U		B42-3488-04	LABEL(FREQUENCY)		
311	1T		B62-0089-10	INSTRUCTION MANUAL		
313	2U		E23-0657-04	TERMINAL		
315	1U		G11-0665-04	SHEET(FAN CABLE)		
317	1U, 2T		H10-2726-03	POLYSTYRENE FOAMED FIXTURE		
320	1T		H13-0855-04	PROTECTION BOARD		
322	2U		H25-0029-04	PROTECTION BAG(60X110)		

A: TM-742 K, P, M, M2, E, E2, E3

B: TM-942 K, P, M

# TM-742 A/742 E/942 A

## PARTS LIST

× New Parts

Parts without Parts No. are not supplied.

Les articles non mentionnés dans le Parts No. ne sont pas fournis.

Teile ohne Parts No. werden nicht geliefert.

UT-1200

Ref. No. 参照番号	Address 位置	New Parts 新	Parts No. 部品番号	Description 部品名 / 規格	Desti- nation 仕向	Re- marks 備考
324	1T, 1U		H25-0760-04	PROTECTION BAG(200X350)		
326	2T		H52-0112-04	ITEM CARTON BOX		
328	3T		H62-0101-04	OUTER CARTON BOX		
330	1U		J69-0325-05	O RING		
335	1U		N99-0355-15	SCREW SET		
340	1U, 2T		X57-3600-11	TX-RX UNIT (1200MHz 10W)		

A: TM-742 K, P, M, M2, E, E2, E3


B: TM-942 K, P, M



# TM-742 A/742 E/942 A


## EXPLODED VIEW

J	M2x6	:	N80-2006-45
K	M2x8	:	N80-2008-45
L	M2.6x5	:	N80-2605-45
Q	NUT	:	N14-0552-05

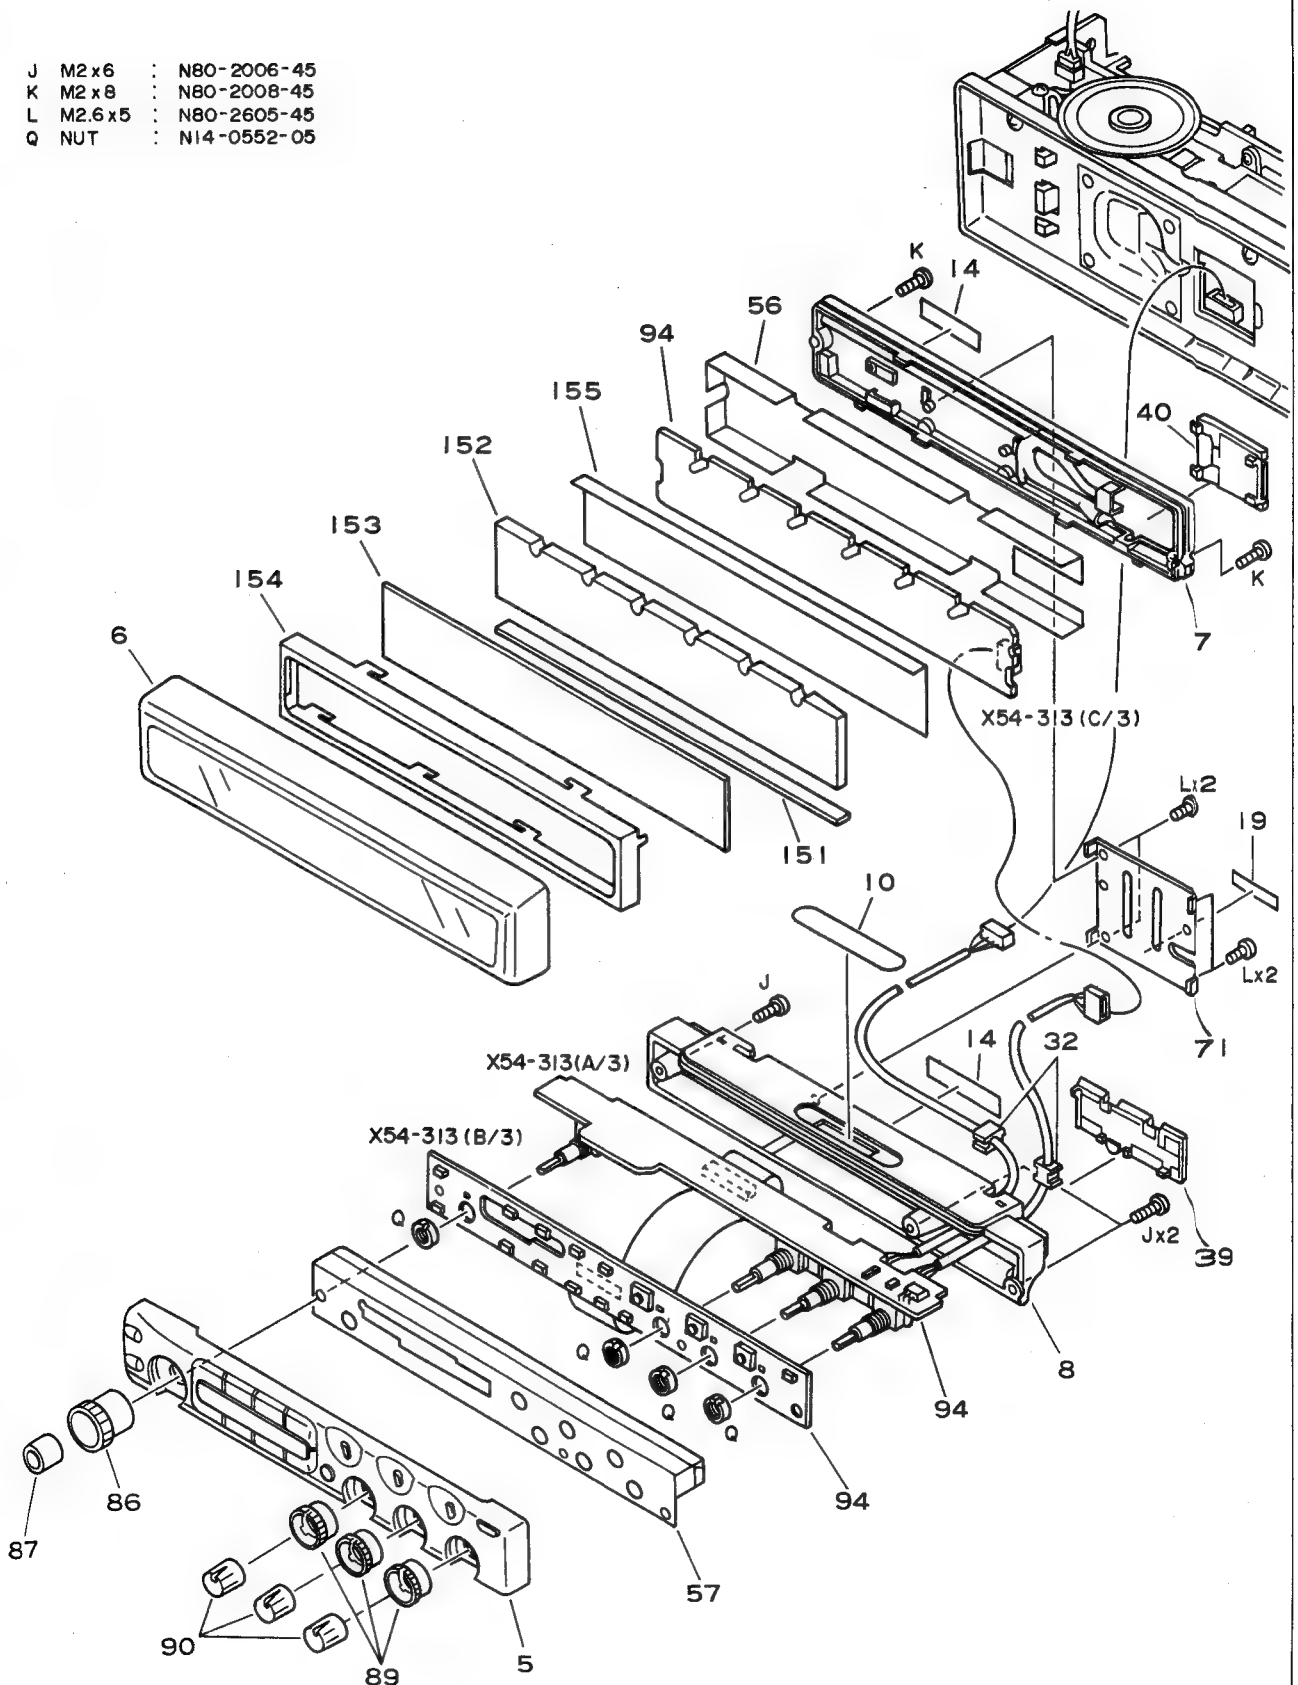

**TM-742 A/742 E/942 A**


## EXPLODED VIEW

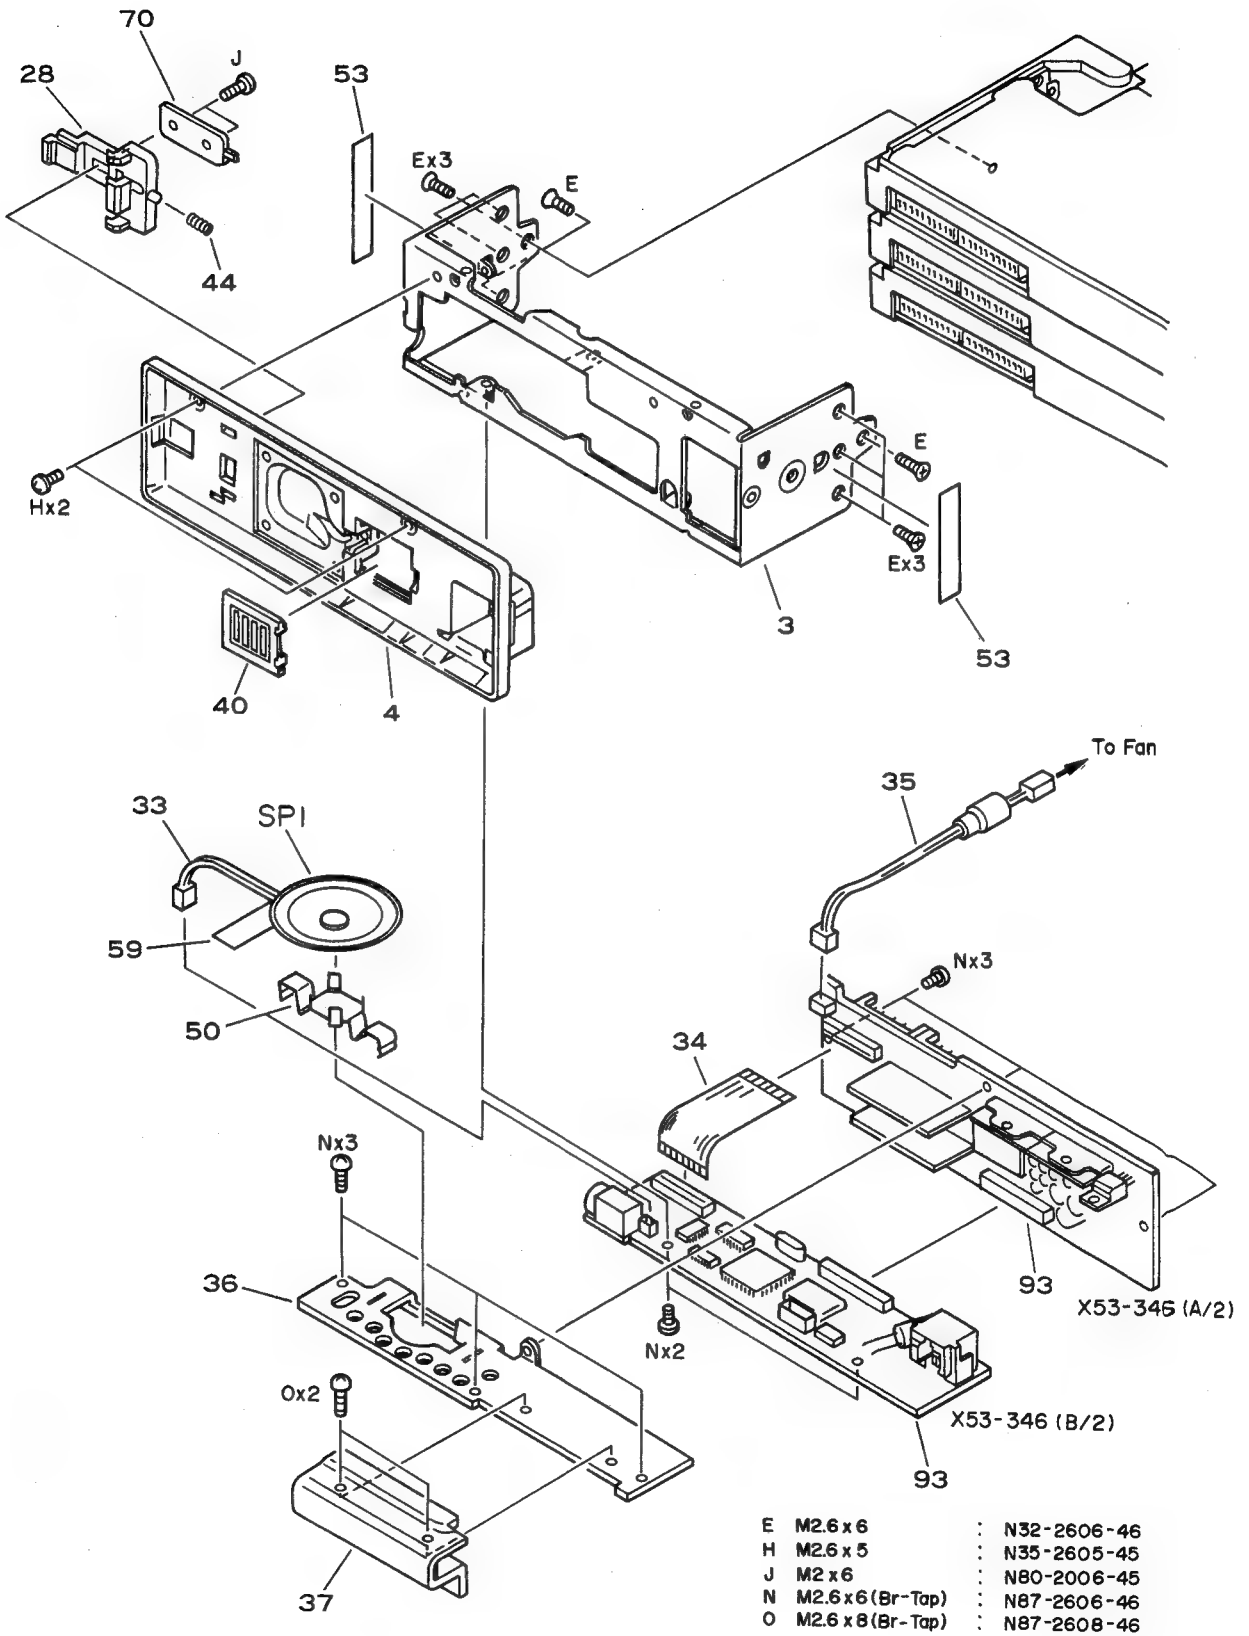

# TM-742 A/742 E/942 A

## EXPLODED VIEW


TX-RX UNIT

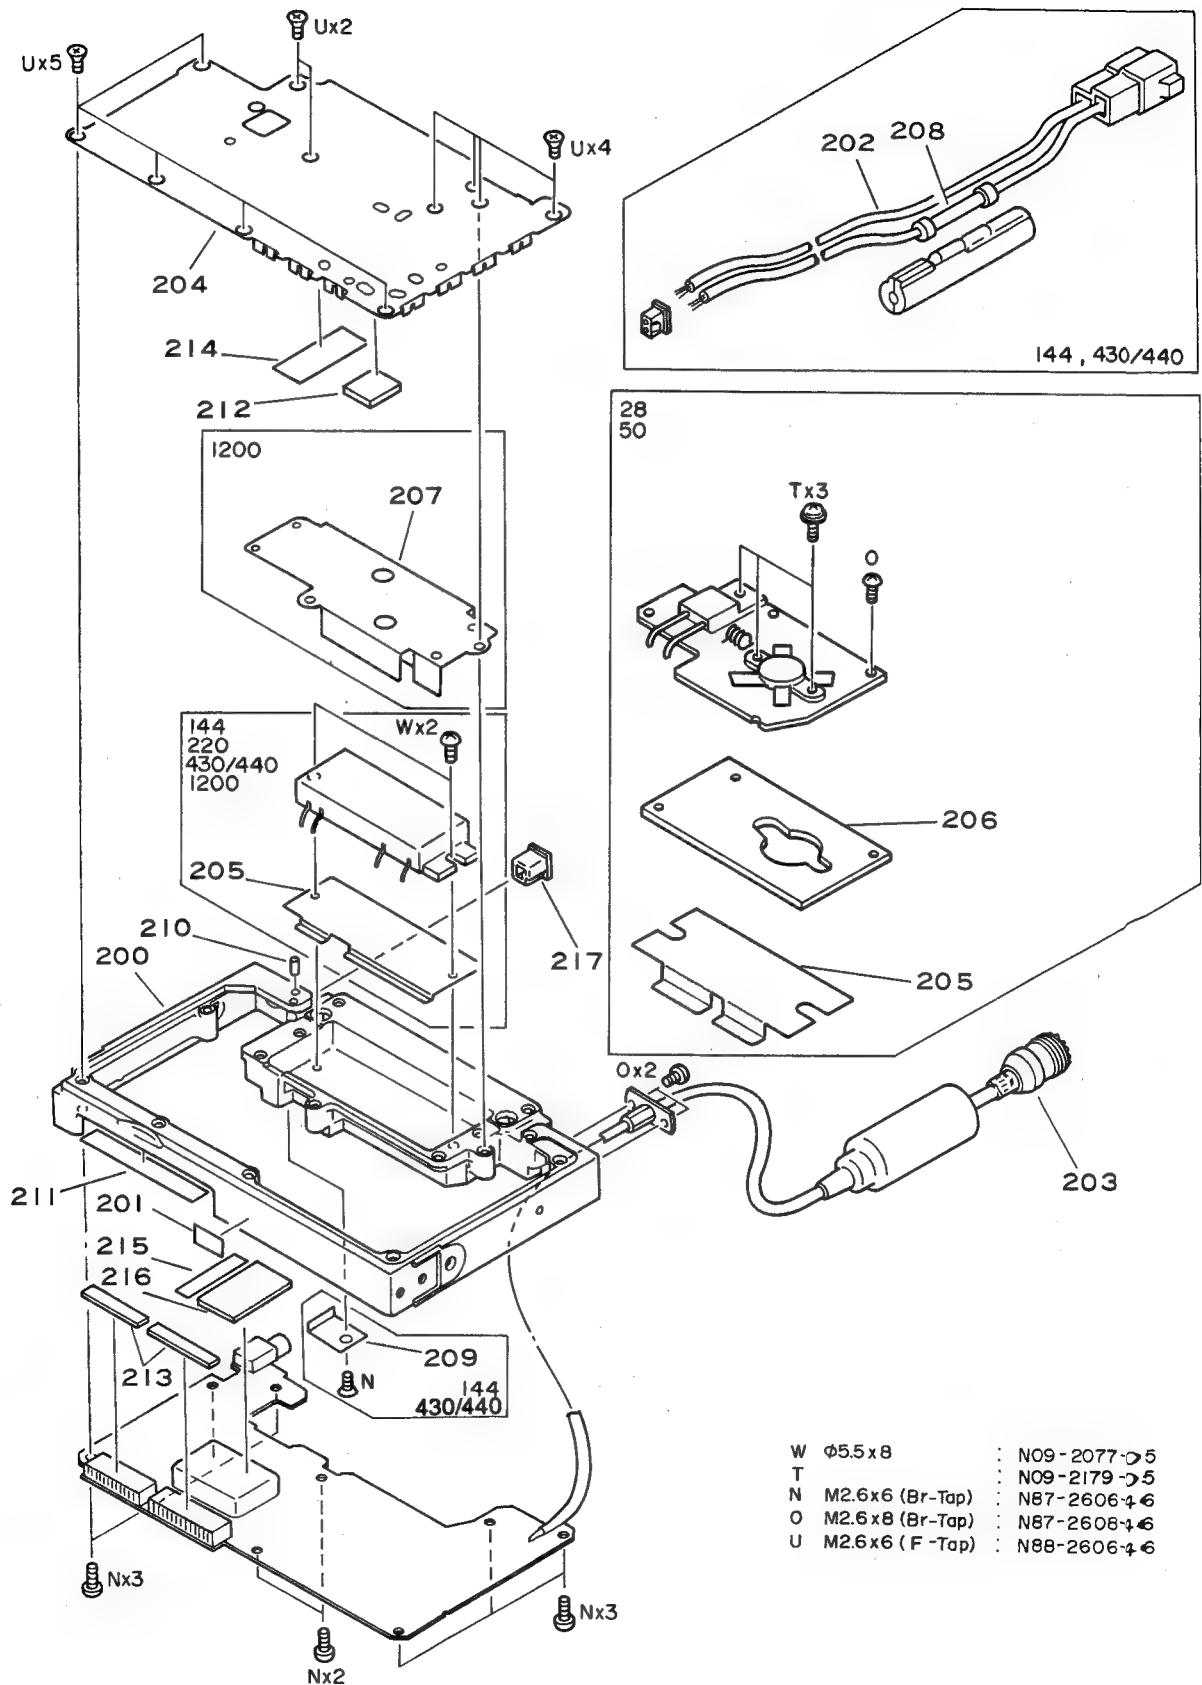

W	φ5.5x8	:	N09-2077-05
T		:	N09-2179-05
N	M2.6x6 (Br-Tap)	:	N87-2606-46
O	M2.6x8 (Br-Tap)	:	N87-2608-46
U	M2.6x6 (F-Tap)	:	N88-2606-46

# TM-742 A/742 E/942 A


## PACKING (UNIT)

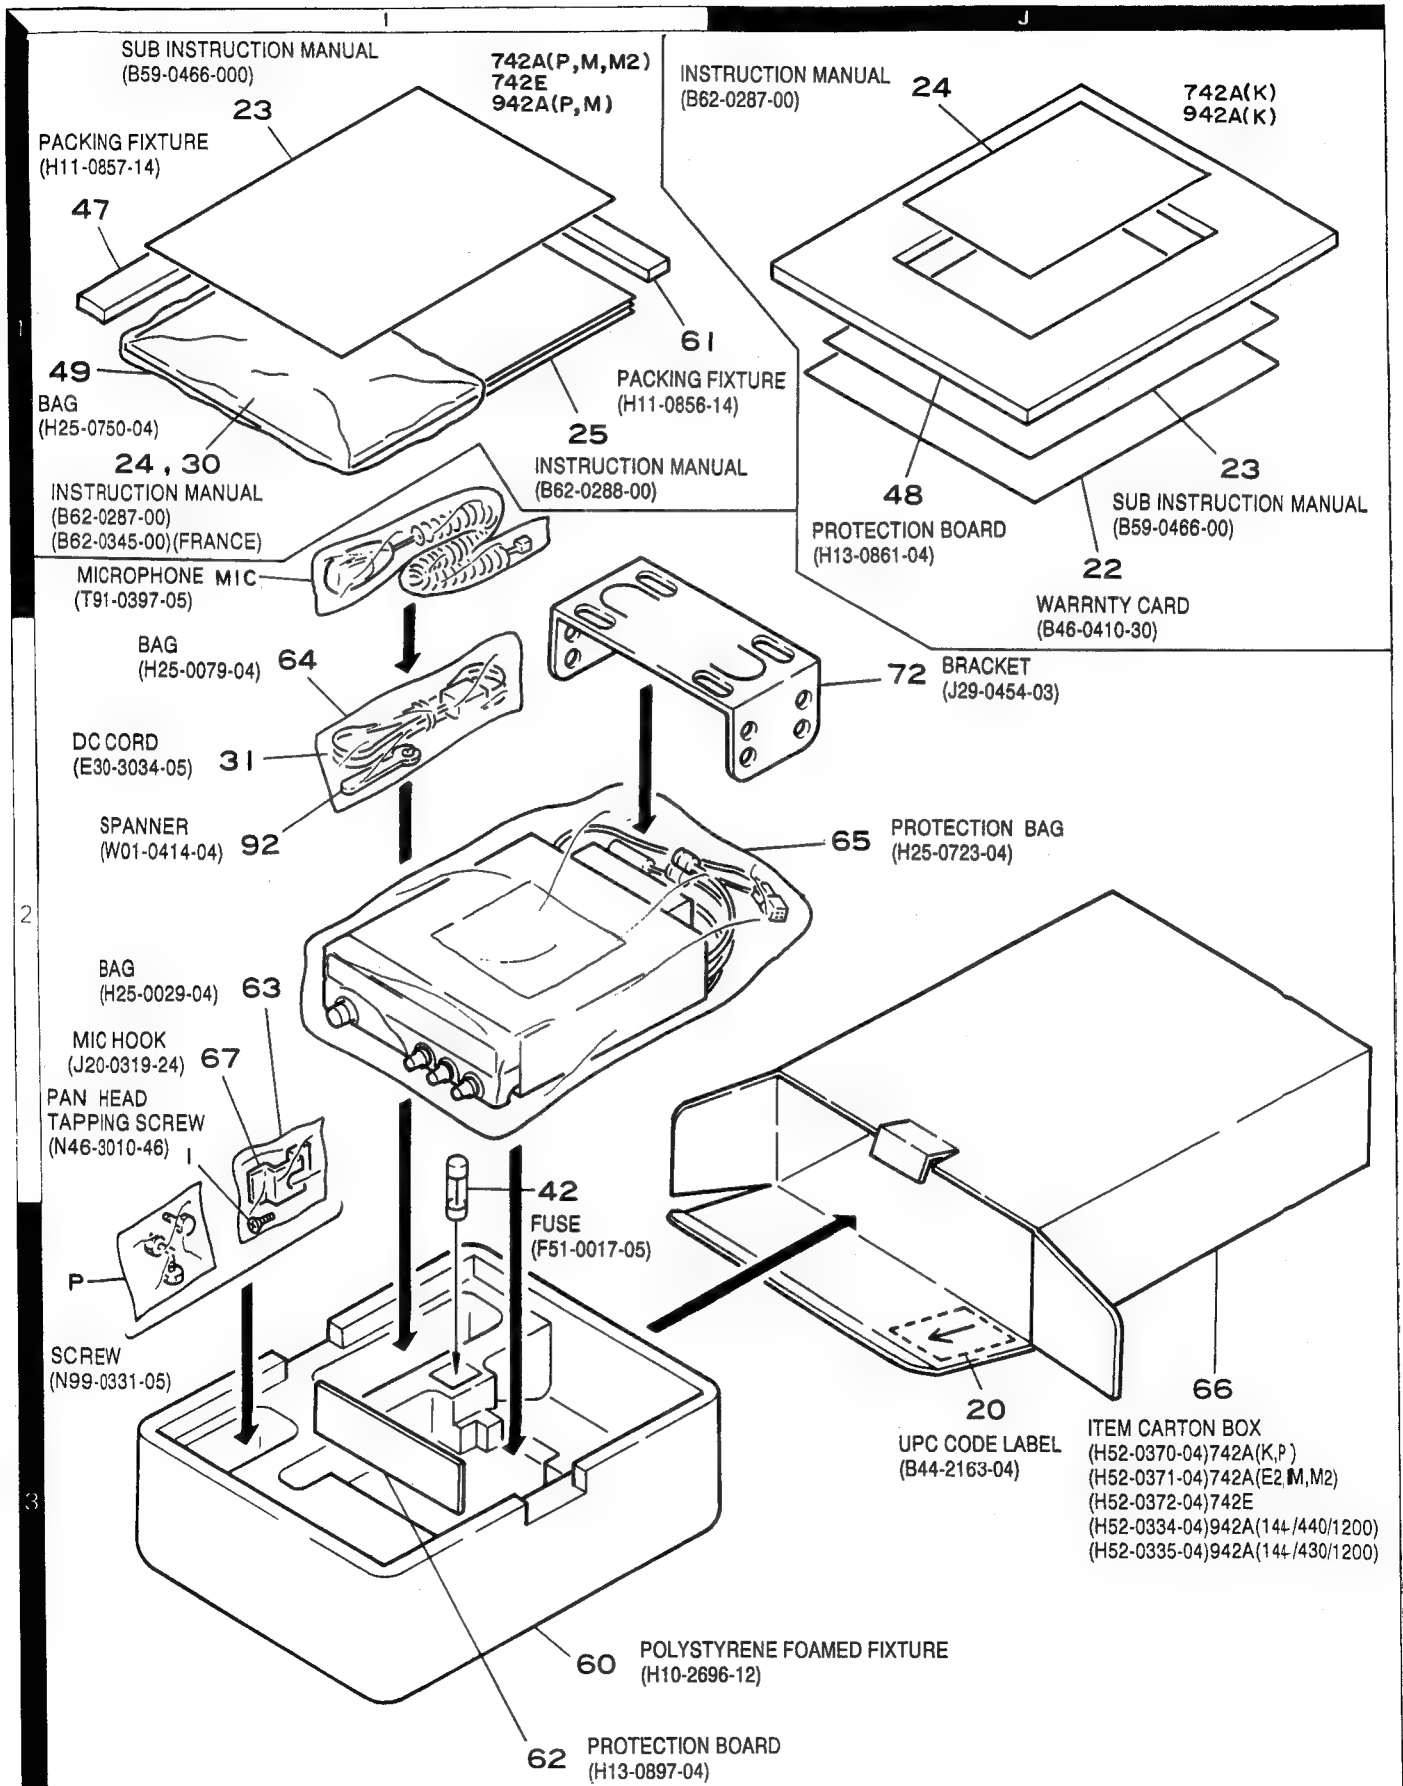



# TM-742 A/742 E/942 A

## PACKING (OPTIONAL BAND UNIT)

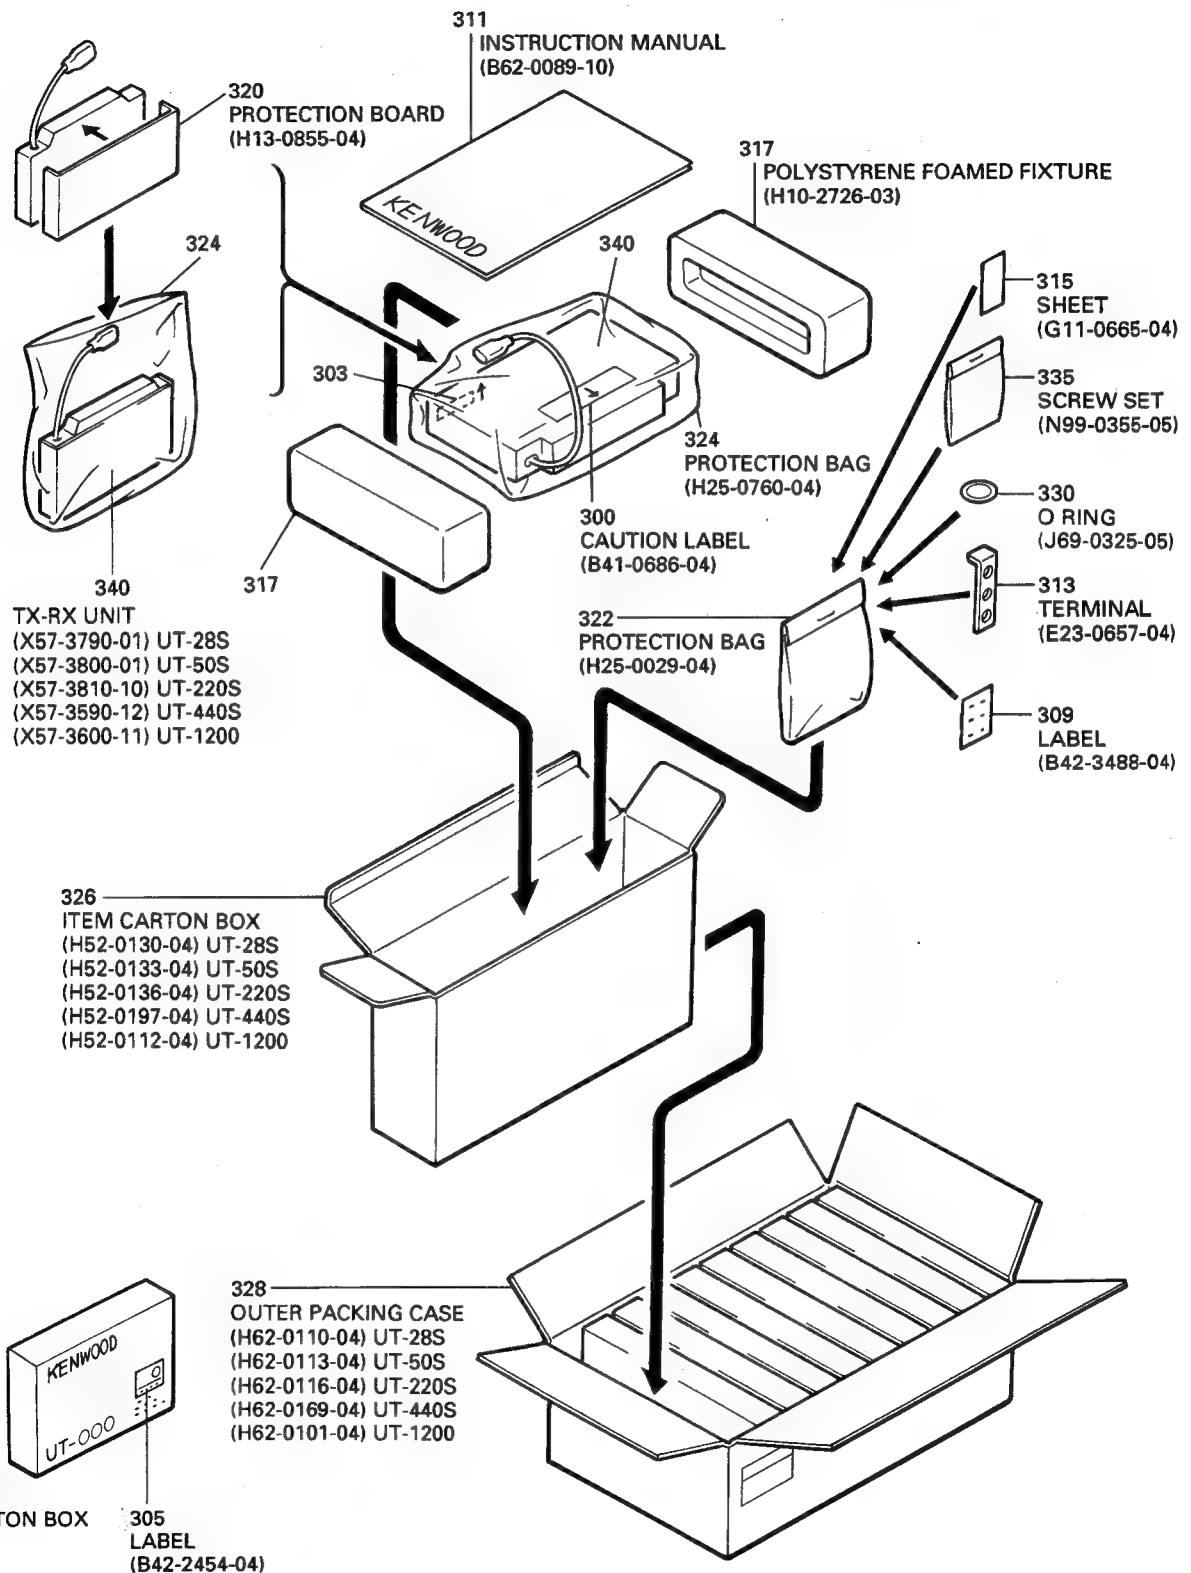

# TM-742 A/742 E/942 A

## ADJUSTMENT

### Required Test Equipment

1. Tester and DC V.M  
Use a tester with high input impedance.
2. RF VTVM (RF VM)  
Input impedance: 1 M ohms or more, 2 pF or less  
Voltage range: FS = 10 mV to 300 V  
Measurable frequency: 1,300 MHz (maximum)
3. Frequency counter (F counter)  
Input sensitivity: Approximately 50 mV  
Measurable frequency: 1,300 MHz or more
4. DC power supply  
Voltage: 10 to 17 V (variable)  
Current: 12 A or more
5. Power meter  
Power measurement ranges: 100 W, 50 W, and 15 W  
Input impedance: 50 ohms  
Measurable frequency: 1,300 MHz
6. AF vacuum voltmeter (AF VM)  
Input impedance: 1 M ohms or more  
Voltage range: FS= 1 mV to 30 V  
Measurable frequency: 50 Hz to 10 kHz
7. AF generator (AG)  
Output frequency: 100 Hz to 10 kHz  
Output voltage: 0.5 mV to 1 V
8. Linear detector  
Measurable frequency: 1,300 MHz
9. Spectrum analyzer  
Measurable frequency: 1,300 MHz
10. Directional coupler
11. Oscilloscope  
Use a high-sensitivity oscilloscope with horizontal input socket.
12. SSG  
Use an SSG that produces a frequency of 20 to 1,300 MHz with amplitude and frequency modulation.  
Output level: 0.1  $\mu$ V to 100 mV
13. Dummy resistor  
Use an 8-ohm resistor exceeding the rated value in each band.

### 14. Noise generator

Use a noise generator whose output contains a high-frequency component of more than 1,300 MHz (near ignition noise).

### 15. Sweep generator

Use a sweep generator that can sweep the 1,300 MHz band.

### 16. Tracking generator

### Preparation

- Set controls to the position shown in Table 23 unless otherwise specified.

POWER SW	OFF
AF VOL VR	MIN
SQL VOL VR	MIN

Table 23

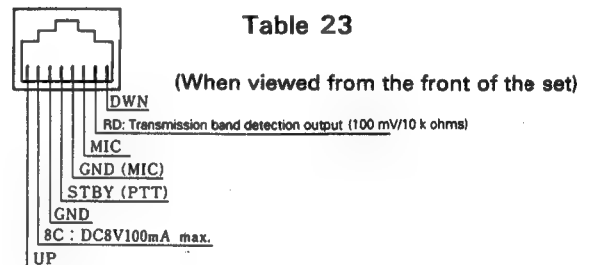


Fig. 55 Microphone Socket (on Front Panel)

- Use an insulated tool such as a plastic tool during adjustment (especially trimmer coil adjustment).
- For SSG protection, do not connect a microphone to the microphone socket during receiver block adjustment.
- Check that the power switch is off before the power cord is connected.
- The SSG output level is displayed at the release end.
- After setting the various controls as shown in Table 23, make sure that the indications of the display and the LEDs are as shown in Figure 56 when the POWER switch is turned ON while pushing the MR key.

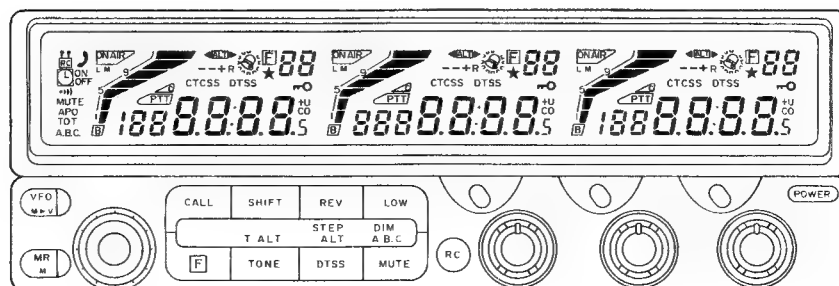


Fig. 56

## ADJUSTMENT

### • 144 MHz Band (TM-742 A/E, TM-942A)

#### Common Section Adjustment

Item	Condition	Measurement point			Adjustment point			Specification
		Test equipment	Unit	Terminal	Unit	Parts	Method	
1. Lock voltage check	1. Frequency: 144.040MHz Receive	Digital voltmeter	TX-RX	TP2			Check the lock voltage.	1.8 ~ 3.0 V

The DC power supply must be set to the rated voltage.


#### Receiver Section Adjustment

Item	Condition	Measurement point			Adjustment point			Specification
		Test equipment	Unit	Terminal	Unit	Parts	Method	
1. Bandpass filter (BPF) adjustment	1. Frequency: 144.040MHz SSG output: 0 dBμ Modulation: 1 KHz Deviation: 3 KHz Receive	Digital voltmeter SSG			TX-RX	L1-4	Adjust so that the voltmeter reading is maximum.	Voltmeter reading is maximum.
2. Receive sensitivity check	1. Frequency: 144.040 MHz 145.940 MHz 147.940 MHz SSG output: -9 dBμ Modulation: 1 KHz Deviation: 3 KHz	Distortion meter Millivoltmeter Oscilloscope SSG	Rear panel	EXT.SP			Check	12 dB SINAD or more
	2. AM sensitivity (K and P models only) Frequency: 118.040 MHz SSG output: 25 dBμ Modulation: 1 KHz Deviation: 30%						Press the MHz key and check that the frequency is set to 118.040 with an encoder.	12 dB SINAD or more
	Press the MR key							
3. Distortion factor adjustment	1. Frequency: 145.040 MHz SSG output: 40 dBμ Modulation: 1 KHz Deviation: 3 KHz AF output: 4V/8 ohms	Distortion factor Oscilloscope SSG	Rear panel	EXT.SP	TX-RX	L6	Minimize the distortion factor.	5% or less
4. Signal strength meter adjustment	1. Frequency: 145.040 MHz SSG output: 22dBμ Modulation: 1 KHz Deviation: 3 KHz	SSG			TX-RX	VR1	Adjust so that all LEDs go on, then one LED goes off.	
	2 SSG output 23 dBμ MOD: 1 kHz DEV: 3 kHz						Adjust the SSG output so that all signal strength meter LEDs go on.	The SSG output is 20 ± 6 dBμ
5. Squelch check	1. Frequency: 146.040 MHz SSG output: Off Modulation: 1 KHz Deviation: 3 KHz	SSG	Rear panel	EXT.SP			Set the SQL control to the closing position	Control position 8:00-11:00 BUSY should go out
	2 SSG output: -14dBμ MOD: 1 kHz DEV: 3 kHz							Squelch should open, and BUSY should light up
	3. SSG output: -3 dBμ						SQL control fully clockwise	Noise should disappear
								Squelch should open

## ADJUSTMENT

### Transmitter Section Adjustment

Item	Condition	Measurement point			Adjustment point			Specification
		Test equipment	Unit	Terminal	Unit	Parts	Method	
1. Power adjustment (check)	1. Maximum power check Frequency: 136.000 MHz 145.980 MHz 147.980 MHz Transmit	Powermeter Ammeter	Rear Panel	ANT	TX-RX	VR3	Check	57 W or more
	2. High-power adjustment Transmit				TX-RX	VR3	Adjust. 54W	46 to 59 W (11.5 A or less)
	3. Medium-power adjustment Transmit				TX-RX	VR4	Adjust. 12W	10 to 14 W
	4. Low-power check Transmit						Check	3 to 8 W
2. Deviation adjustment (check)	1. Frequency: 145.980 MHz AG: 1 kHz, 50 mV (K, P, M) 28 mV (E) Filter: 25 15K Transmit	DC detector Oscilloscope	Rear Panel	ANT	TX-RX	VR2	Adjust (in the higher + or - direction). 4.2 KHz	± 4.0 to 5.0 KHz
	2. Frequency: 145.980 MHz AG: 1 KHz, 5.0 mV (K, P, M) 2.8 mV (E) Transmit						Check	± 2.2 to 3.6 kHz
3. Tone check	1. Frequency: 144.980 MHz Tone On Transmit	DC detector Oscilloscope	Rear Panel	ANT			Check	± 0.5 to 1.5 KHz
4. Protection check	1. Frequency: 147.980 MHz Antenna: open Transmit	Ammeter					Check	12.0 A or less
5. Frequency adjustment	1. Frequency: 145.980 MHz Transmit	Frequency counter Powermeter			TX-RX	TC1	145.980 MHz	± 100 Hz

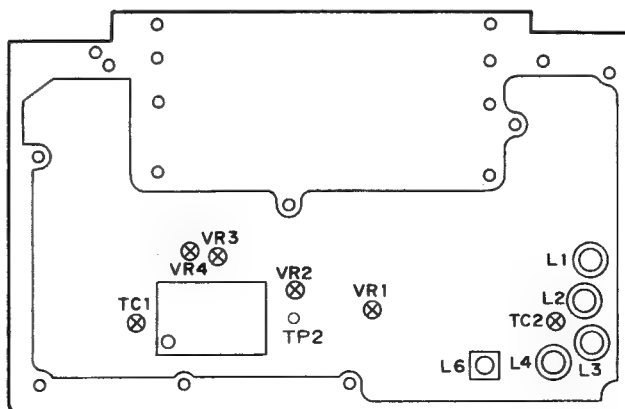

Note: Use an adjustment tool with a ceramic or plastic tip 1.5 mm square for L1 through L4.

Fig. 57 144 MHz band adjustment: Component layout (upper view)

## ADJUSTMENT

### • 430/440 MHz Band (TM-742A/E, TM-942A, UT-440S)

#### Common Section adjustment

Item	Condition	Measurement point			Adjustment point			Specification
		Test equipment	Unit	Terminal	Unit	Parts	Method	
1. Lock voltage check	1. Frequency: 468.000 MHz Receive	Digital voltmeter	TX-RX	TP2			Check the lock voltage.	7.5 ~ 9.1 V (K, P) 7.0 ~ 9.5 V (E, M)


#### Receiver Section Adjustment

Item	Condition	Measurement point			Adjustment point			Specification
		Test equipment	Unit	Terminal	Unit	Parts	Method	
1. Helical scanning adjustment	1. Frequency: 445.050 MHz (K and P) 435.050 MHz (E, M) Spectrum analyzer: Center of above frequency Tracking generator: Output: -30 dBm	Digital voltmeter Spectrum analyzer Tracking generator			TX-RX	TC1, TC2, L3, L4X3	<p>Adjust each frequency as shown in the figure.</p>	
2. Receive sensitivity check	1. Frequency: 445.050 MHz (K and P) 435.050 MHz (E, M) SSG output: -9 dBμ Modulation: 1 KHz Deviation: 3 KHz	Distortion meter Millivoltmeter Oscilloscope SSG	Rear panel	EXT.SP			Check	12 dB-SINAD or more
3. Distortion factor adjustment	1. Frequency: 445.050 MHz (K and P) 435.050 MHz (E, M) SSG output: 40 dBμ Modulation: 1 KHz Deviation: 3 KHz AF output: 4 V/8 ohms	Distortion meter Oscilloscope SSG	Rear panel	EXT.SP	TX-RX	L7	Minimize the distortion factor.	5% or less
4. Signal strength meter adjustment (check)	1. Frequency: 445.050 MHz (K and P) 435.050 MHz (E, M) SSG output: 23 dBμ Modulation: 1 KHz Deviation: 3 KHz	SSG			TX-RX	VR1		Adjust so that all LEDs go on, then one LED goes off.
	2. SSG output: 24 dBμ						Adjust the SSG output so that all signal strength meter LEDs go on.	The SSG output is 20 ± 6 dBμ.
5. Squelch check	1. Frequency: 445.050 MHz (K and P) 435.050 MHz (E, M) SSG output: Off Modulation: 1 KHz Deviation: 3 KHz	SSG	Rear panel	EXT.SP			Set the SQL control to the closing position	Control position 8:00-11:00 BUSY should go out
	2. SSG output: -14 dBμ							Squelch should open, and BUSY should light up
	3. SSG output: -3 dBμ						SQL control fully clockwise	Noise should disappear Squelch should open

## ADJUSTMENT

### Transmitter Section Adjustment

Item	Condition	Measurement point			Adjustment point			Specification
		Test equipment	Unit	Terminal	Unit	Parts	Method	
1. Power adjustment (check)	1. Maximum power check Frequency: 445.000 MHz (K and P) 435.000 MHz (E, M) Transmit	Powermeter Ammeter	Rear panel	ANT	TX-RX	VR3	Check	38 W or more
	2. High power adjustment Frequency: 445.000 MHz (K and P) 435.000 MHz (E, M) Transmit				TX-RX	VR3	Adjust. 37W	31 to 42 W (10 A or less)
	3. Medium power adjustment Frequency: 445.000 MHz (K and P) 435.000 MHz (E, M) Transmit				TX-RX	VR4	Adjust. 13W	10 to 14 W
	4. Low power check Frequency: 445.000 MHz (K and P) 435.000 MHz (E, M) Transmit						Check	3 to 8 W
2. Deviation adjustment (check)	1. Frequency: 445.000 MHz (K and P) 435.000 MHz (E, M) AG: 1 kHz 50 mV (K, P M) 28 mV (E) Filter: 25 15K Transmit	DC detector Oscilloscope	Rear panel	ANT	TX-RX	VR2	Adjust (in the higher + or - direction). 4.2 KHz	± 4.0 to 5.0 KHz
	2. Frequency: 445.000 MHz (K and P) 435.000 MHz (E, M) AG: 1 KHz, 5.5 mV (K, P E, M) 2.8 mV (E) Transmit						Check	± 2.2 to 3.6 kHz
3. Tone check	1. Frequency: 434.980 MHz (E, M) 448.200 MHz (K, P) Tone: On Transmit	DC detector Oscilloscope	Rear panel	ANT			Check	± 0.5 to 1.5 KHz
4. Protection check	1. Frequency: 449.980 MHz (K and P) 439.980 MHz (E, M) Antenna: Open Transmit	Ammeter					Check	10 A or less
5. Frequency adjustment	1. Frequency: 445.000 MHz (K and P) 435.000 MHz (E, M) Transmit	Frequency counter Powermeter			TX-RX	TC3	445.000 MHz K, P 435.000 MHz E, M, M2	± 500 Hz

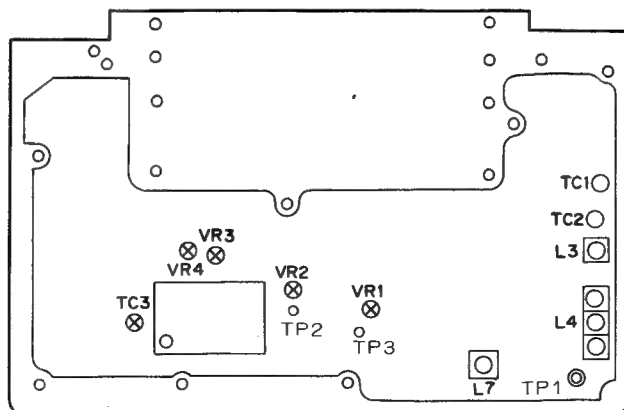

1. The adjustment of the 430M BAND can be carried out by taking the 144M BAND unit out of the control unit.

**Fig. 58 430 MHz band adjustment: Component layout (upper view)**

## ADJUSTMENT

### • 1200 MHz Band (TM-942A, UT-1200)

#### Common Section Adjustment

Item	Condition	Measurement point			Adjustment point			Specification
		Test equipment	Unit	Terminal	Unit	Parts	Method	
1. Lock voltage check	1. Frequency: 1299.975 MHz Receive	Digital voltmeter	TX-RX	TP2	TX-RX IC11	TRIM-CAP.	Check the lock voltage.	6.1 ~ 6.9 V

#### Receiver Section Adjustment

Item	Condition	Measurement point			Adjustment point			Specification
		Test equipment	Unit	Terminal	Unit	Parts	Method	
1. ALT adjustment	1. Frequency: 1270.100 MHz	Digital voltmeter SSG					Check the voltage.	AV
	2. The same as the above frequency. SSG: Off				TX-RX	VR2	Adjust so that the voltage is 0.1 V higher than above.	AV + 0.1 V
	3. The same as the above frequency. SSG output: 0 dB $\mu$ Modulation: 1 KHz Deviation: 3 KHz				TX-RX	L6	Check that the voltage is 0.2 V higher than above when ALT is on, then turn ALT off.	(A + 0.1) V + 0.2 V
2. Receive sensitivity check	1. Frequency: 1270.100 MHz SSG output: -9 dB $\mu$ Modulation: 1 KHz Deviation: 3 KHz	Distortion meter Millivoltmeter Oscilloscope SSG	Rear panel	EXT.SP			Check	12 dB SINAD or more
3. Distortion adjustment	1. Frequency: 1270.100 MHz SSG output: 40 dB $\mu$ Modulation: 1 KHz Deviation: 3 KHz AF output: 4 V/8 ohms	Distortion meter Oscilloscope SSG	Rear panel	EXT.SP	TX-RX	L4	Minimize the distortion factor.	5% or less
4. Signal strength meter adjustment (check)	1. Frequency: 1270.100 MHz SSG output: 24 dB $\mu$ Modulation: 1 KHz Deviation: 3 KHz	SSG			TX-RX	VR1		Adjust so that all LEDs go on, then one LED goes off.
	2. SSG output: 25 dB $\mu$						Adjust the SSG output so that all signal strength meter LEDs go on.	The SSG output is 20 $\pm$ 6 dB $\mu$ .
5. Squelch check	1. Frequency: 1270.100 MHz SSG output: Off Modulation: 1 KHz Deviation: 3 KHz	SSG	Rear panel	EXT.SP			Set the SQL control to the closing position	Control position 8:00-11:00 BUSY should go out
	2. SSG output: -14 dB $\mu$ MOD: 1 kHz DEV: 3 kHz							Squelch should open, and BUSY should light up
	3. SSG output: -3 dB $\mu$						SQL control fully clockwise	Noise should disappear Squelch should open

# TM-742 A/742 E/942 A

## ADJUSTMENT

### Transmitter Section Adjustment

Item	Condition	Measurement point			Adjustment point			Specification
		Test equipment	Unit	Terminal	Unit	Parts	Method	
1. Power adjustment	1. Maximum power check Frequency: 1270.000 MHz Transmit	Powermeter Ammeter	Rear panel	ANT	TX-RX	VR4	Check	11 W or more
	2. High-power adjustment Frequency: 1270.000 MHz Transmit				TX-RX	VR4	Adjust 10W The fan runs when the PTT switch is pressed. (It continues for a while after the PTT switch is released, then stops.)	8 to 14 W (6.5 A or less)
	3. Low-power adjustment Frequency: 1270.000 MHz Transmit				TX-RX	VR5	Adjust 1 W	0.7 to 1.4 W
2. Deviation adjustment (check)	1. Frequency: 1270.000 MHz AG: 1kHz 50 mV (K, P M) 28 mV (E) Transmit	DC detector Oscilloscope	Rear panel	ANT	TX-RX	VR3	Adjust (in the higher + or - direction). 4.2 KHz	± 4.0 to 5.0 KHz
	2. Frequency: 1270.000 MHz AG: 1 KHz, 5.0 mV (K, P M) 2.8 mV (E) Transmit						Check	± 2.2 to 3.6 kHz
3. Tone check	1. Frequency: 1279.98 MHz Tone: On Transmit	DC detector Oscilloscope	Rear panel	ANT			Check	± 0.5 to 1.5 KHz
4. Protection check	1. Frequency: 1240.000 MHz 1270.000 MHz 1299.980 MHz Antenna: Open Transmit	Ammeter					Check	8.5 A or less
5. Frequency check	1. Frequency: 1270.000 MHz Transmit	Frequency counter Powermeter					1270.000 MHz	± 1 KHz

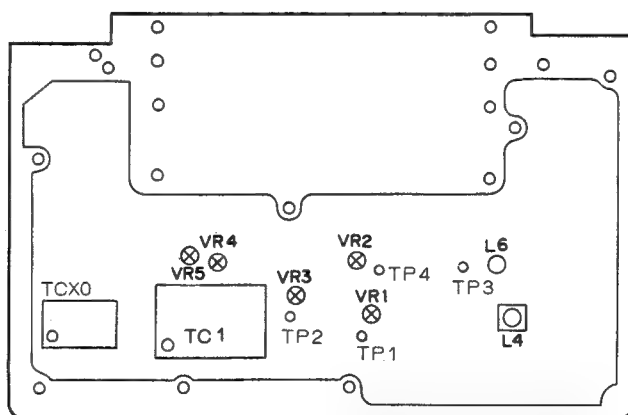


Fig. 59 1200 MHz band adjustment: Component layout (upper view)

The adjustment of the 12000MHz BAND can be carried out by taking the 144MHz BAND and 430MHz BAND units out of the control unit and by installing the 1200MHz BAND at the position of the 430MHz BAND (central part). Cord with alligator clip should be used to connect the power supply. Take care for the clip not to short-circuit with the casing.



## ADJUSTMENT

### ● 28 MHz Band (UT-28S)

#### Common Section Adjustment

Item	Condition	Measurement point			Adjustment point			Specification
		Test equipment	Unit	Terminal	Unit	Parts	Method	
1. Lock Voltage check	1. Frequency: 29.700MHz Receive	Digital voltmeter	TX-RX	TP3			Check the lock voltage	5.5 - 7.0 V

#### Receiver Section Adjustment

Item	Condition	Measurement point			Adjustment point			Specification
		Test equipment	Unit	Terminal	Unit	Parts	Method	
1. Band pass filter (BPF) adjustment	1. Frequency: 29.700MHz SSG output: 0 dBμ Modulation: 1KHz Deviation: 3 KHz Receive	Digital voltmeter SSG	Rear panel	ANT	TX-RX	L1-4	Adjust so that the voltmeter reading is maximum	voltmeter reading is maximum
2. Distortion factor adjustment	1. Frequency: 28.890MHz SSG output: 60 dBμ Modulation: 1KHz Deviation: 3KHz	Distortion meter Oscilloscope SSG	Rear panel	EXT.SP	TX-RX	L5	Minimize the distortion factor	5% or less
3. Receive sensitivity check	1. Frequency: 28.040MHz SSG output: -9 dBμ Modulation: 1KHz Deviation: 3 KHz	Distortion meter Millivoltmeter Oscilloscope SSG	Rear panel	EXT.SP			Check	12 dB SINAND or more
	2. Frequency: 29.700 MHz SSG output: -9 dBμ Modulation: 1KHz Deviation: 3 KHz		Rear panel	EXT.SP			Check	12 dB SINAND or more
	3. Frequency: 22.040 MHz SSG output: 20 dBμ Modulation: 1KHz Deviation: 3 KHz		Rear panel	EXT.SP			Check	12 dB SINAND or more
4. Signal strength meter adjustment	1. Frequency: 28.890 MHz SSG output: 24 dBμ Modulation: 1 KHz Deviation: 3 KHz	SSG			TX-RX	VR1	Adjust so that all LEDS go on, then one LED goes off.	
5. Signal strength meter check	2. Frequency: 28.890 MHz SSG output: 25 dBμ Modulation: 1 KHz Deviation: 3 KHz						Adjust the SSG output so that all signal strength meter LEDs go on.	The SSG output is 20 ± 6 dBμ
6. Squelch check	1. Frequency: 28.890 MHz SSG output: OFF	SSG	Rear panel	EXT.SP			Set the SQL control to the closing position	Control position 8:00-11:00 BUSY should go out
	2. Frequency: 28.890 MHz SSG output: -14 dBμ Modulation: 1 KHz Deviation: 3 KHz							Squelch should open, and BUSY should light up
							SQL control fully clockwise	Noise should disappear
	3. SSG output: -3 dBμ							Squelch should open

# TM-742 A/742 E/942 A

## ADJUSTMENT

### Transmitter Section Adjustment

Item	Condition	Measurement point			Adjustment point			Specification
		Test equipment	Unit	Terminal	Unit	Parts	Method	
1. Maximum power check	1. Frequency: 28.850 MHz Transmit	Powermeter Ammeter	Rear panel	ANT	TX-RX	VR3	Check	52 W or more
2. High-power adjustment (check)	1. Frequency: 28.850 MHz Transmit				TX-RX	VR3	Adjust	50 W
	2. Frequency: 28.000 MHz Transmit						Check	44 W or more
	3. Frequency: 29.640 MHz Transmit						Check	44 W or more
3. Medium-power adjustment (check)	1. Frequency: 28.850 MHz Transmit	Powermeter	Rear panel	ANT	TX-RX	VR4	Adjust	11.5 W
	2. Frequency: 28.000 MHz Transmit						Check	9.5 W or more
	3. Frequency: 29.640 MHz Transmit						Check	9.5 W or more
4. Low-power check	1. Frequency: 28.850 MHz Transmit	Powermeter	Rear panel	ANT			Check	3.0 ~ 8.0 W
	2. Frequency: 28.000 MHz Transmit						Check	3.0 ~ 8.0 W
	3. Frequency: 29.640 MHz Transmit						Check	3.0 ~ 8.0 W
5. Deviation adjustment (check)	1. Frequency: 28.850 MHz AG: 1 kHz 50 mV (K, P M) 28 mV (E) Filter: <span style="border: 1px solid black; padding: 2px;">25 15K</span> Transmit	DC detector Oscilloscope AG	Rear panel	ANT	TX-RX	VR2	Adjust 4.4 KHz	$\pm 4.4 \text{ KHz} \pm 200 \text{ Hz}$
	2. Frequency: 28.050 MHz AG: 1 KHz, 5.0 mV (K, P M) 2.8 mV (E) Filter: <span style="border: 1px solid black; padding: 2px;">25 15K</span> Transmit						Check	$\pm 2.2 \text{ to } 3.6 \text{ kHz}$
6. Frequency adjustment	1. Frequency: 28.850 MHz Transmit	Frequency counter Powermeter	Rear panel	ANT	TX-RX	TC1	Adjust	$28.850 \text{ MHz} \pm 20 \text{ Hz}$
7. Protection check	1. Frequency: 29.690 MHz Antenna: Open Transmit	Ammeter					Check	12A or less

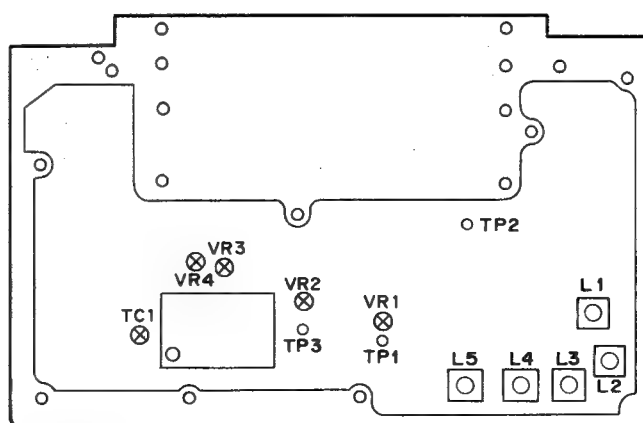


Fig. 60 28 MHz Band adjustment: Component layout (upper view)

# ADJUSTMENT

## ● 50 MHz Band (UT-50S)

### Common Section Adjustment

Item	Condition	Measurement point			Adjustment point			Specification
		Test equipment	Unit	Terminal	Unit	Parts	Method	
1. Lock Voltage check	1. Frequency: 54.000 MHz Receive	Digital voltmeter	TX-RX	TP3			Check the lock voltage	6.0 - 7.6 V

### Receiver Section Adjustment

Item	Condition	Measurement point			Adjustment point			Specification
		Test equipment	Unit	Terminal	Unit	Parts	Method	
1. Bandpass filter (BPF) adjustment	1. Frequency: 52.040 MHz SSG output: 0 dBμ Modulation: 1 KHz Deviation: 3 KHz Receive	Digital voltmeter SSG	Rear panel	ANT	TX-RX	L1~4	Adjust to that the voltmeter reading is maximum	voltmeter reading is maximum
2. Distortion factor adjustment	1. Frequency: 52.040 MHz SSG output: 60 dBμ Modulation: 1 KHz Deviation: 3 KHz	Distortion meter Oscilloscope SSG	Rear panel	EXT.SP	TX-RX	L5	Minimize the distortion factor	5% or less
3. Receive sensitivity check	1. Frequency: 53.940 MHz SSG output: -9 dBμ Modulation: 1 KHz Deviation: 3 KHz	Distortion meter Millivoltmeter Oscilloscope SSG	Rear panel	EXT.SP			Check	12 dB SINAND or more
	2. Frequency: 50.040 MHz SSG output: -9 dBμ Modulation: 1 KHz Deviation: 3 KHz		Rear panel	EXT.SP			Check	12 dB SINAND or more
	3. Frequency: 40.040 MHz SSG output: 20 dBμ Modulation: 1 KHz Deviation: 3 KHz		Rear panel	EXT.SP			Check	12 dB SINAND or more
4. Signal strength meter adjustment	1. Frequency: 52.040 MHz SSG output: 24 dBμ Modulation: 1 KHz Deviation: 3 KHz	SSG			TX-RX	VR1	Adjust so that all LEDs go on, then one LED goes off.	
5. Signal strength meter check	2. Frequency: 52.040 MHz SSG output: 25 dBμ Modulation: 1 KHz Deviation: 3 KHz						Adjust the SSG output so that all signal strength meter LEDs go on.	The SSG output is 20 ± 6 dBμ
6. Squelch check	1. Frequency: 52.040 MHz SSG output: Off	SSG	Rear panel	EXT.SP			Set the SQL control to the closing position	Control position 8:00-11:00 BUSY should go out
	2. Frequency: 52.040 MHz SSG output: -14 dB Modulation: 1 KHz Deviation: 3 KHz							Squelch should open, and BUSY should light up
	3. SSG output: -3 dBμ						SQL control fully clockwise	Noise should disappear Squelch should open

# ADJUSTMENT

## Transmitter Section Adjustment

Item	Condition	Measurement point			Adjustment point			Specification
		Test equipment	Unit	Terminal	Unit	Parts	Method	
1. Maximum power check	1. Frequency: 52.000 MHz Transmit	Powermeter Ammeter	Rear Panel	ANT	TX-RX	VR3	Check	53W or more
2. High-power adjustment (check)	1. Frequency: 52.000 MHz Transmit				TX-RX	VR3	Adjust	51W
	2. Frequency: 50.000 MHz Transmit						Check	45W or more
	3. Frequency: 53.940 MHz Transmit						Check	45W or more
3. Medium-power adjustment (check)	1. Frequency: 52.000 MHz Transmit	Powermeter	Rear Panel	ANT	TX-RX	VR4	Adjust	11.5W
	2. Frequency: 50.000 MHz Transmit						Check	9.5W or more
	3. Frequency: 53.940 MHz Transmit						Check	9.5W or more
4. Low-power check	1. Frequency: 52.000 MHz Transmit	Powermeter	Rear Panel	ANT			Check	3.0 ~ 8.0W
	2. Frequency: 50.000 MHz Transmit						Check	3.0 ~ 8.0W
	3. Frequency: 53.940 MHz Transmit						Check	3.0 ~ 8.0W
5. Deviation adjustment (check)	1. Frequency: 52.000 MHz AG: 1KHz, 50 mV (K, P M) 28 mV (E) Filter: 25 15K Transmit	DC detector Oscilloscope AG	Rear Panel	ANT	TX-RX	VR2	Adjust 4.4 KHz	±4.4 KHz ± 200Hz
	2. Frequency: 52.000 MHz AG: 1KHz, 5.0 mV (K,P M) 2.8 mV (E) Filter: 25 15K Transmit						Check	± 2.2 to 3.6 kHz
6. Frequency adjustment	1. Frequency: 52.000 MHz Transmit	Frequency counter Powermeter	Rear Panel	ANT	TX-RX	TC1	Adjust	52.000 MHz ± 10 Hz
7. Protection check	1. Frequency: 53.990MHz Antenna: Open Transmit	Ammeter					Check	12A or less.

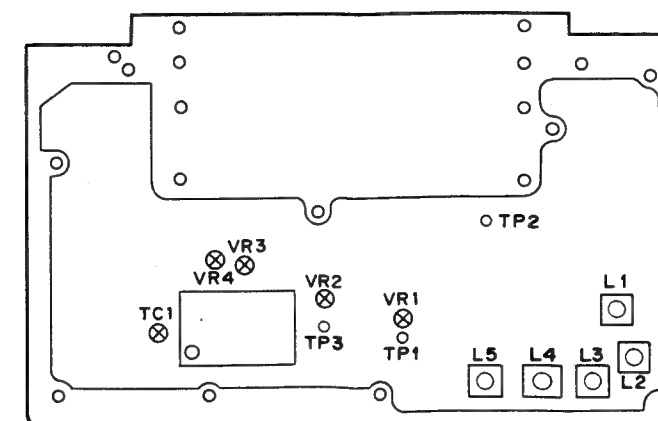


Fig. 61 50 MHz BAND adjustment: Component layout (upper view)

ADJUSTMENT

● 220 MHz Band (UT-220S)  
Common Section Adjustment

Item	Condition	Measurement point			Adjustment point			Specification
		Test equipment	Unit	Terminal	Unit	Parts	Method	
1. Lock voltage check	1. Frequency: 215.000 MHz Receive	Digital voltmeter	TX-RX	TP2			Check the lock voltage	1.2 ~ 2.6V

Receiver Section Adjustment

Item	Condition	Measurement point			Adjustment point			Specification
		Test equipment	Unit	Terminal	Unit	Parts	Method	
1. Bandpass filter (BPF) adjustment	1. Frequency: 222.540 MHz SSG output: 0dBμ Modulation: 1 KHz Deviation: 3KHz Receive	Digital voltmeter SSG	Rear Panel	ANT.	TX-RX	L1~4	Voltmeter reading is maximum.	Voltmeter reading is maximum.
2. Distortion factor adjustment	1. Frequency: 222.540 MHz SSG output: 60dBμ Modulation: 1 KHz Deviation: 3KHz	Distortion meter Oscilloscope SSG	Rear Panel	EXT. SP	TX-RX	L6	Minimize the distortion factor	5% or less
3. Receive sensitivity check	1. Frequency: 222.540 MHz SSG output: -9dBμ Modulation: 1 KHz Deviation: 3KHz	Distortion meter Millivoltmeter Oscilloscope SSG	Rear Panel	EXT. SP			Check	12dB SINAND or more
	2. Frequency: 215.040 MHz SSG output: 5dBμ Modulation: 1 KHz Deviation: 3KHz		Rear panel	EXT. SP			Check	12dB SINAND or more
	3. Frequency: 229.980 MHz SSG output: -5dBμ Modulation: 1 KHz Deviation: 3KHz		Rear panel	EXT. SP			Check	12dB SINAND or more
4. Signal strength meter adjustment	1. Frequency: 222.540 MHz SSG output: 21dBμ Modulation: 1 KHz Deviation: 3KHz	SSG			TX-RX	VR1	Adjust so that all LEDs go on, then one LED goes off.	
5. Signal strength meter check	2. Frequency: 222.540 MHz SSG output: 22dBμ Modulation: 1 KHz Deviation: 3KHz						Adjust the SSG output so that all signal strength meter LEDs go on.	The SSG output is 20 ± 6 dBμ
6. Squelch check	1. Frequency: 222.540 MHz SSG output: OFF		Rear Panel	EXT. SP			Set the SQL control to the closing position	Control position 8:00-11:00 BUSY should go out
	2. Frequency: 222.540 MHz SSG output: -14dB Modulation: 1 KHz Deviation: 3KHz							Squelch should open, and BUSY should
	3. SSG output: - 3 dBμ						SQL control fully clockwise	Noise should disappear Squelch should open

ADJUSTMENT

Transmitter Section Adjustment

Item	Condition	Measurement point			Adjustment point			Specification
		Test equipment	Unit	Terminal	Unit	Parts	Method	
1. Maximum power check	1. Frequency: 222.500 MHz Transmit	Powermeter Ammeter	Rear Panel	ANT	TX-RX	VR3	Check	28W or more (reference)
2. High-power adjustment (check)	1. Frequency: 222.500 MHz Transmit				TX-RX	VR3	Adjust	26W
	2. Frequency: 222.000 MHz Transmit						Check	22W or more
	3. Frequency: 224.980 MHz Transmit						Check	22W or more
3. Medium-power adjustment (check)	1. Frequency: 222.540 MHz Transmit	Powermeter	Rear Panel	ANT	TX-RX	VR4	Adjust	11W
	2. Frequency: 222.000 MHz Transmit						Check	9W or more
	3. Frequency: 224.980 MHz Transmit						Check	9W or more
4. Low-power check	1. Frequency: 222.540 MHz Transmit	Powermeter	Rear Panel	ANT			Check	3.0 ~ 8.0W
	2. Frequency: 220.000 MHz Transmit						Check	3.0 ~ 8.0W
	3. Frequency: 222.980 MHz Transmit						Check	3.0 ~ 8.0W
5. Deviation adjustment (check)	1. Frequency: 222.500 MHz AG: 1 kHz, 50 mV Filter: 25 15K Transmit	DC detector Oscilloscope AG	Rear Panel	ANT	TX-RX	VR2	Adjust 4.4 KHz	±4.4KHz ± 200 Hz
	2. Frequency: 222.500 MHz AG: 1 kHz, 5.0 mV Filter: 25 15K Transmit						Check	± 2.2 to 3.6 KHz
6. Frequency adjustment	1. Frequency: 222.500 MHz Transmit	Frequency counter Powermeter	Rear Panel	ANT	TX-RX	TC1	Adjust	222.500 MHz ± 2KHz
7. Protection check	1. Frequency: 224.980 MHz Antenna: Open Transmit	Ammeter					Check	7.5A or less

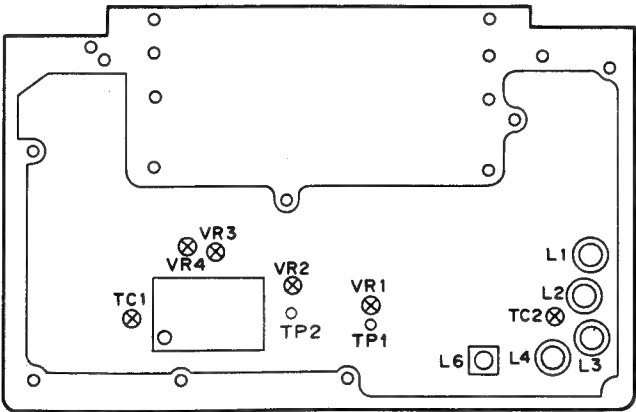




Fig. 62 220 MHz band adjustment: Component layout (upper view)



# TM-742 A/742 E/942 A




CONTROL UNIT (X53-346X-XX) 0-11: 742A (K, P), 0-21: 742A (M), 0-22: 742A (M2),  
Component side view  
2-71: 742E (E, E3)

IC1:HD6433388A04F IC2:LC3564PML-12 IC3:TA78L06F IC4:TC74HC133AF IC5:TC74HC00AF IC6:S-3520CF IC7:HD74HC165PF IC8:BU4066BF IC9:103:NUM4558E IC10:TC35219F IC11:LC7385M  
IC12:PST7030MT IC13:14:TC4S11F IC15:TC4W66F IC16:110:TC4S66F IC104:105:LA4446 IC106:108:109:BU4053BF IC112:KC06 IC113:KCX04 IC114:KC07  
Q2:5.6/10.10.106:2SC4116(Y) Q3:7:DTIC114EU Q4:2SB815(6/7) Q8:107-109:2SD1757K Q11:DTA144EU Q102:2SA1641(S,T) Q103:DTIC144EK Q104:DTA144EK Q105:DTD143EK  
D1:DAW202U D2-4:6:MA112 D5:DTZ9.1A D101-103:DA204U

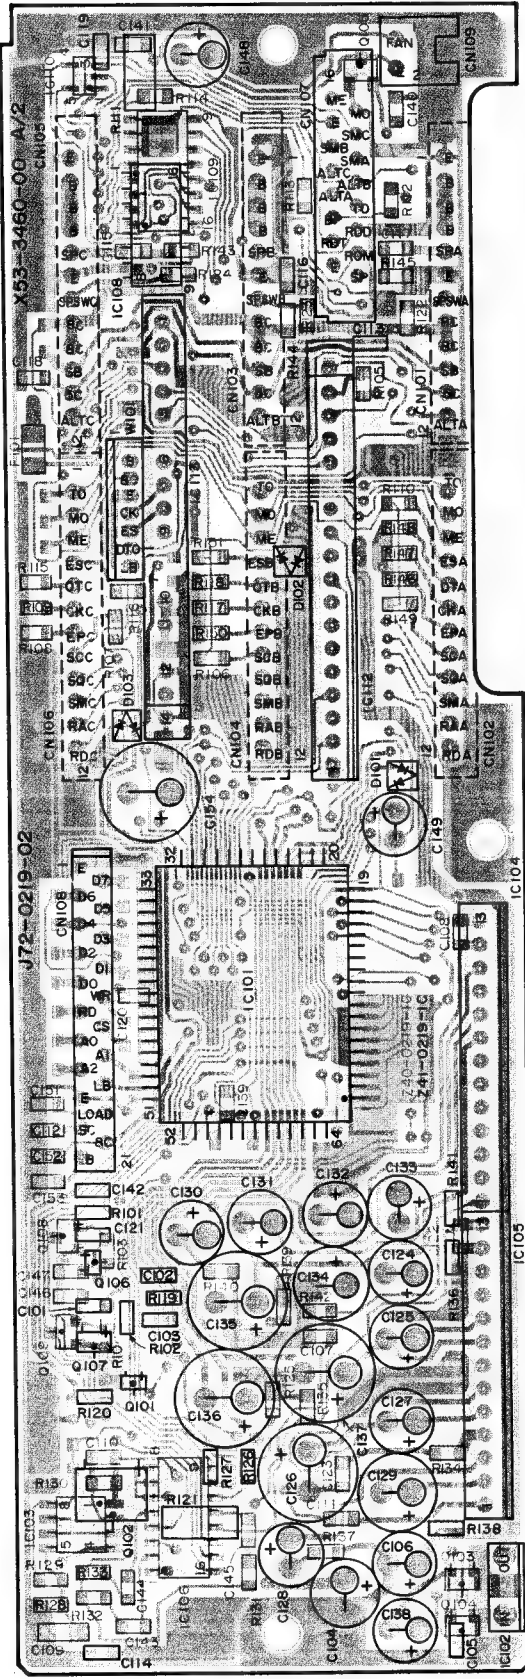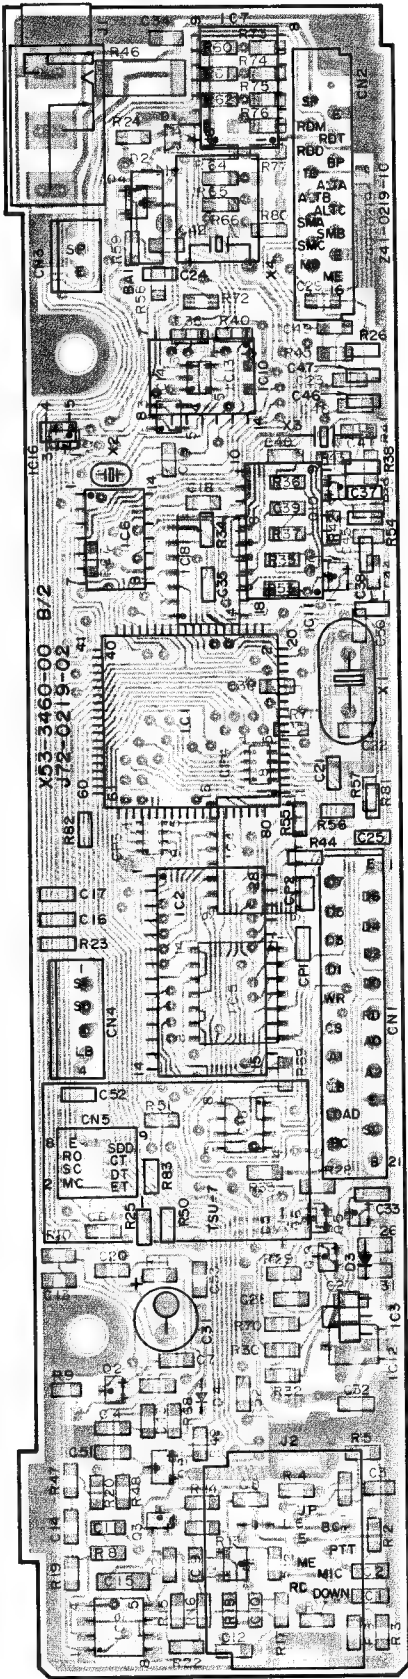


IC1:HD6433388A04F IC2:LC3564PML-12 IC3:TA78L06F IC4:TC74HC133AF IC5:TC74HC00AF IC6:S-3520CF IC7:HD74HC165PF IC8:BU4066BF IC9:103:NUM4558E IC10:TC35219F IC11:LC7385M  
IC12:PST7030MT IC13:14:TC4S11F IC15:TC4W66F IC16:110:TC4S66F IC104:105:LA4446 IC106:108:109:BU4053BF IC112:KC06 IC113:KCX04 IC114:KC07  
Q2:5.6/10.10.106:2SC4116(Y) Q3:7:DTIC114EU Q4:2SB815(6/7) Q8:107-109:2SD1757K Q11:DTA144EU Q102:2SA1641(S,T) Q103:DTIC144EK Q104:DTA144EK Q105:DTD143EK  
D1:DAW202U D2-4:6:MA112 D5:DTZ9.1A D101-103:DA204U


CONTROL UNIT (X53-346X-XX) 0-11: 742A (K, P), 0-21: 742A (M), 0-22: 742A (M2),  
Foil side view  
2-71: 742E (E, E3)

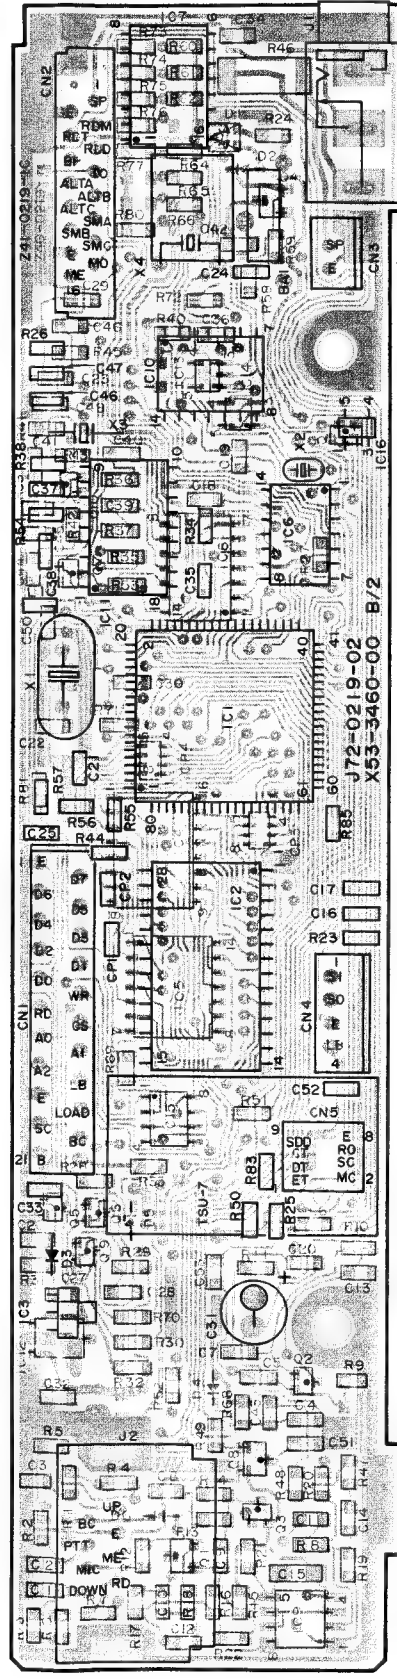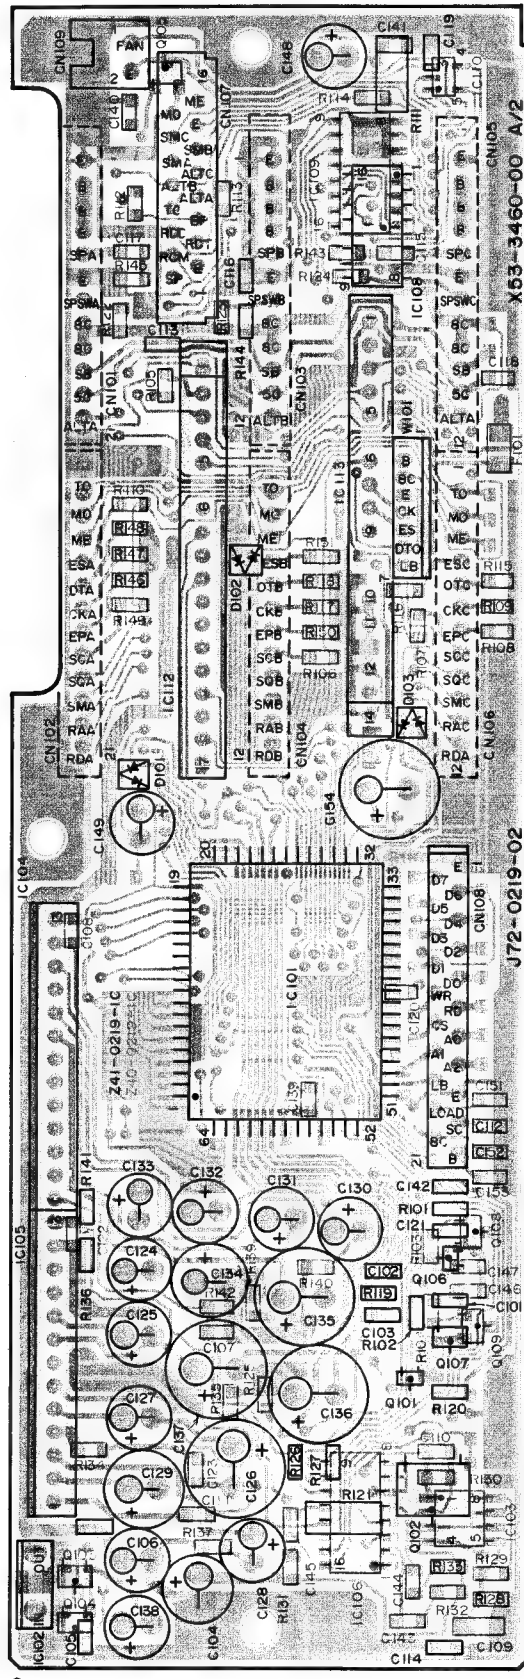


LC3564PML-12



DTA144EK  
DTC114EK  
DTC114EU  
DTD143EK  
2SB815  
2SC4116  
2SD1757K




TC4S11F  
TC4S66F




CXD1095Q


IC1:HD6404719A26H IC2:L78L05BFA IC3-6:203:206:TC4S11F IC201:202:MSM5265GV1K IC204:TC74HC73AF IC205:NUM78L05UA  
Q1:2SA1745(6/7) Q2:2SB1119(S) Q3:101:DTIC114EU Q4:5:DTIC144EU  
D1:MA112 D2:MAV20 D3:4:830:2025-05 D101:105:830:2048-05 D107-112:114:B30:2053-05



L78L05B-I

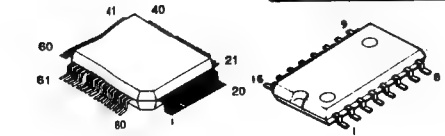


HD6433388A03F



HD74HC165PF


A pattern

B pattern



TC74HC133AF

TC35219F



BU4066BF  
S-3520CF

A pattern


B pattern



# BOARD VIEW

DISPLAY UNIT (X54-3130-11) 742A: (K, P, M, M2) 742E: (E, E2, E3) 942A: (K, P, M)

Component side view

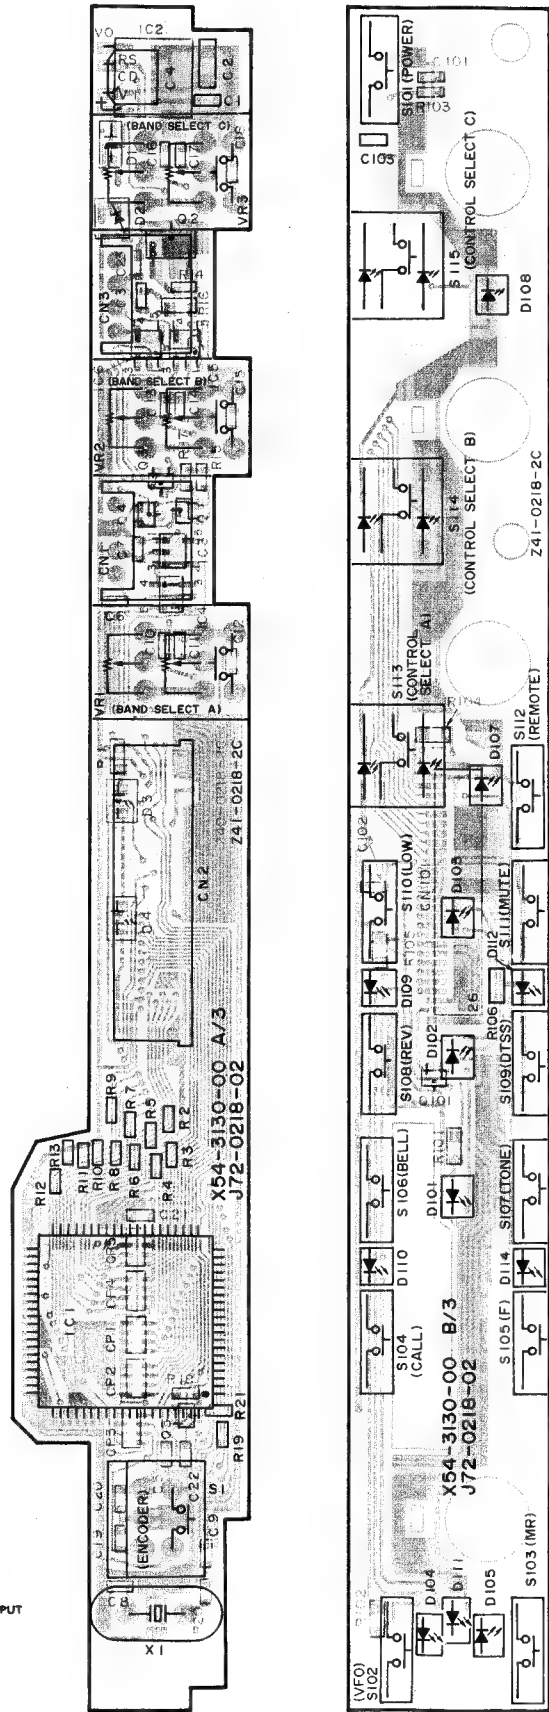


A pattern

B pattern



DTA144EU  
DTC114EU


138



NJM78L05UA

A pattern




B pattern




TC4S11F

DISPLAY UNIT (X54-3130-11) 742A: (K, P, M, M2) 742E: (E, E2, E3) 942A: (K, P, M)

Foil side view

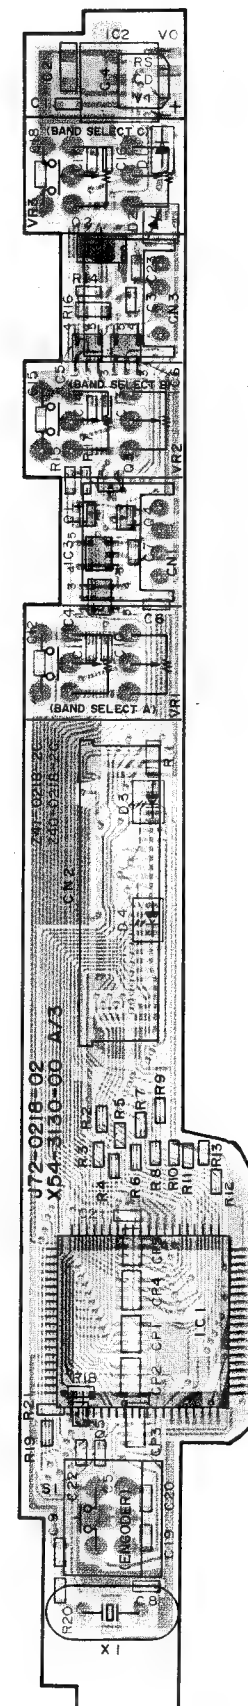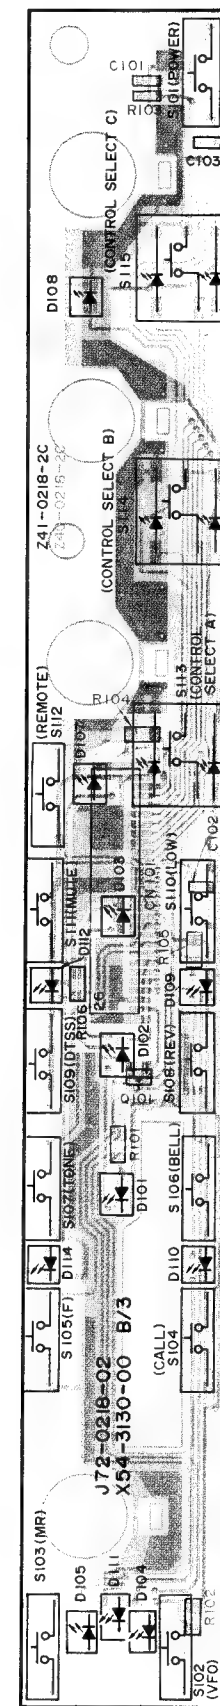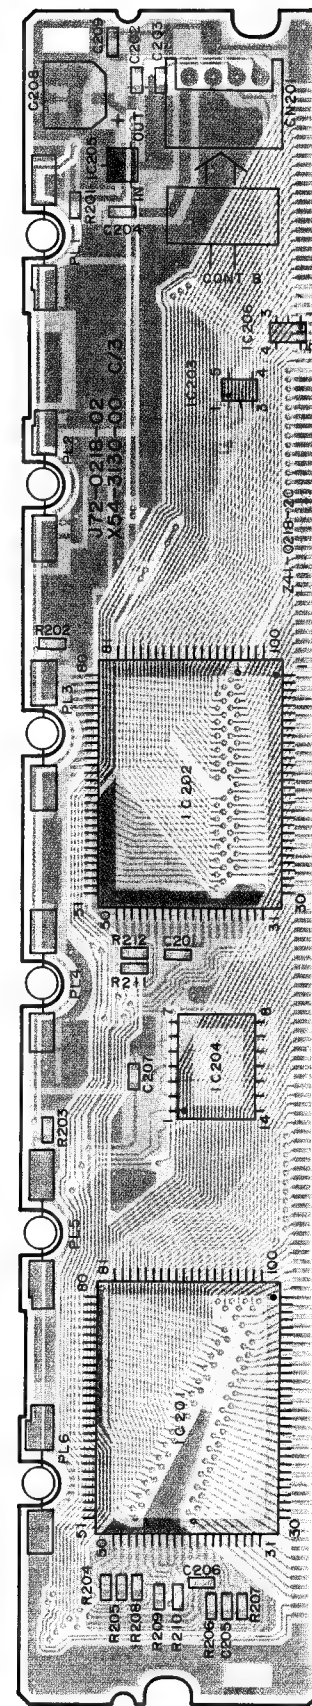

IC1:HD404719A26H IC2:L78L05B-FA IC3:6203.206:TC4S11F IC201:202:MSM5265GS-V1K IC204:TC74HC73AF IC205:NMJ78L05UA  
Q1:2SA1745(6.7) Q2:2SB1119(S) Q3:101:DTC114EU Q4:5:DTC114EU  
D1:MA112 D2:MA720 D3:4B30-2025-05 D101:105:830-2048-05 D107~112:114:830-2053-05




ML-12



44EK  
14EK  
14EU  
43EK  
15  
116  
757K



111F  
166F




95Q

137

Signal line ..... Control line ..... Common DC line

# SCHEMATIC D

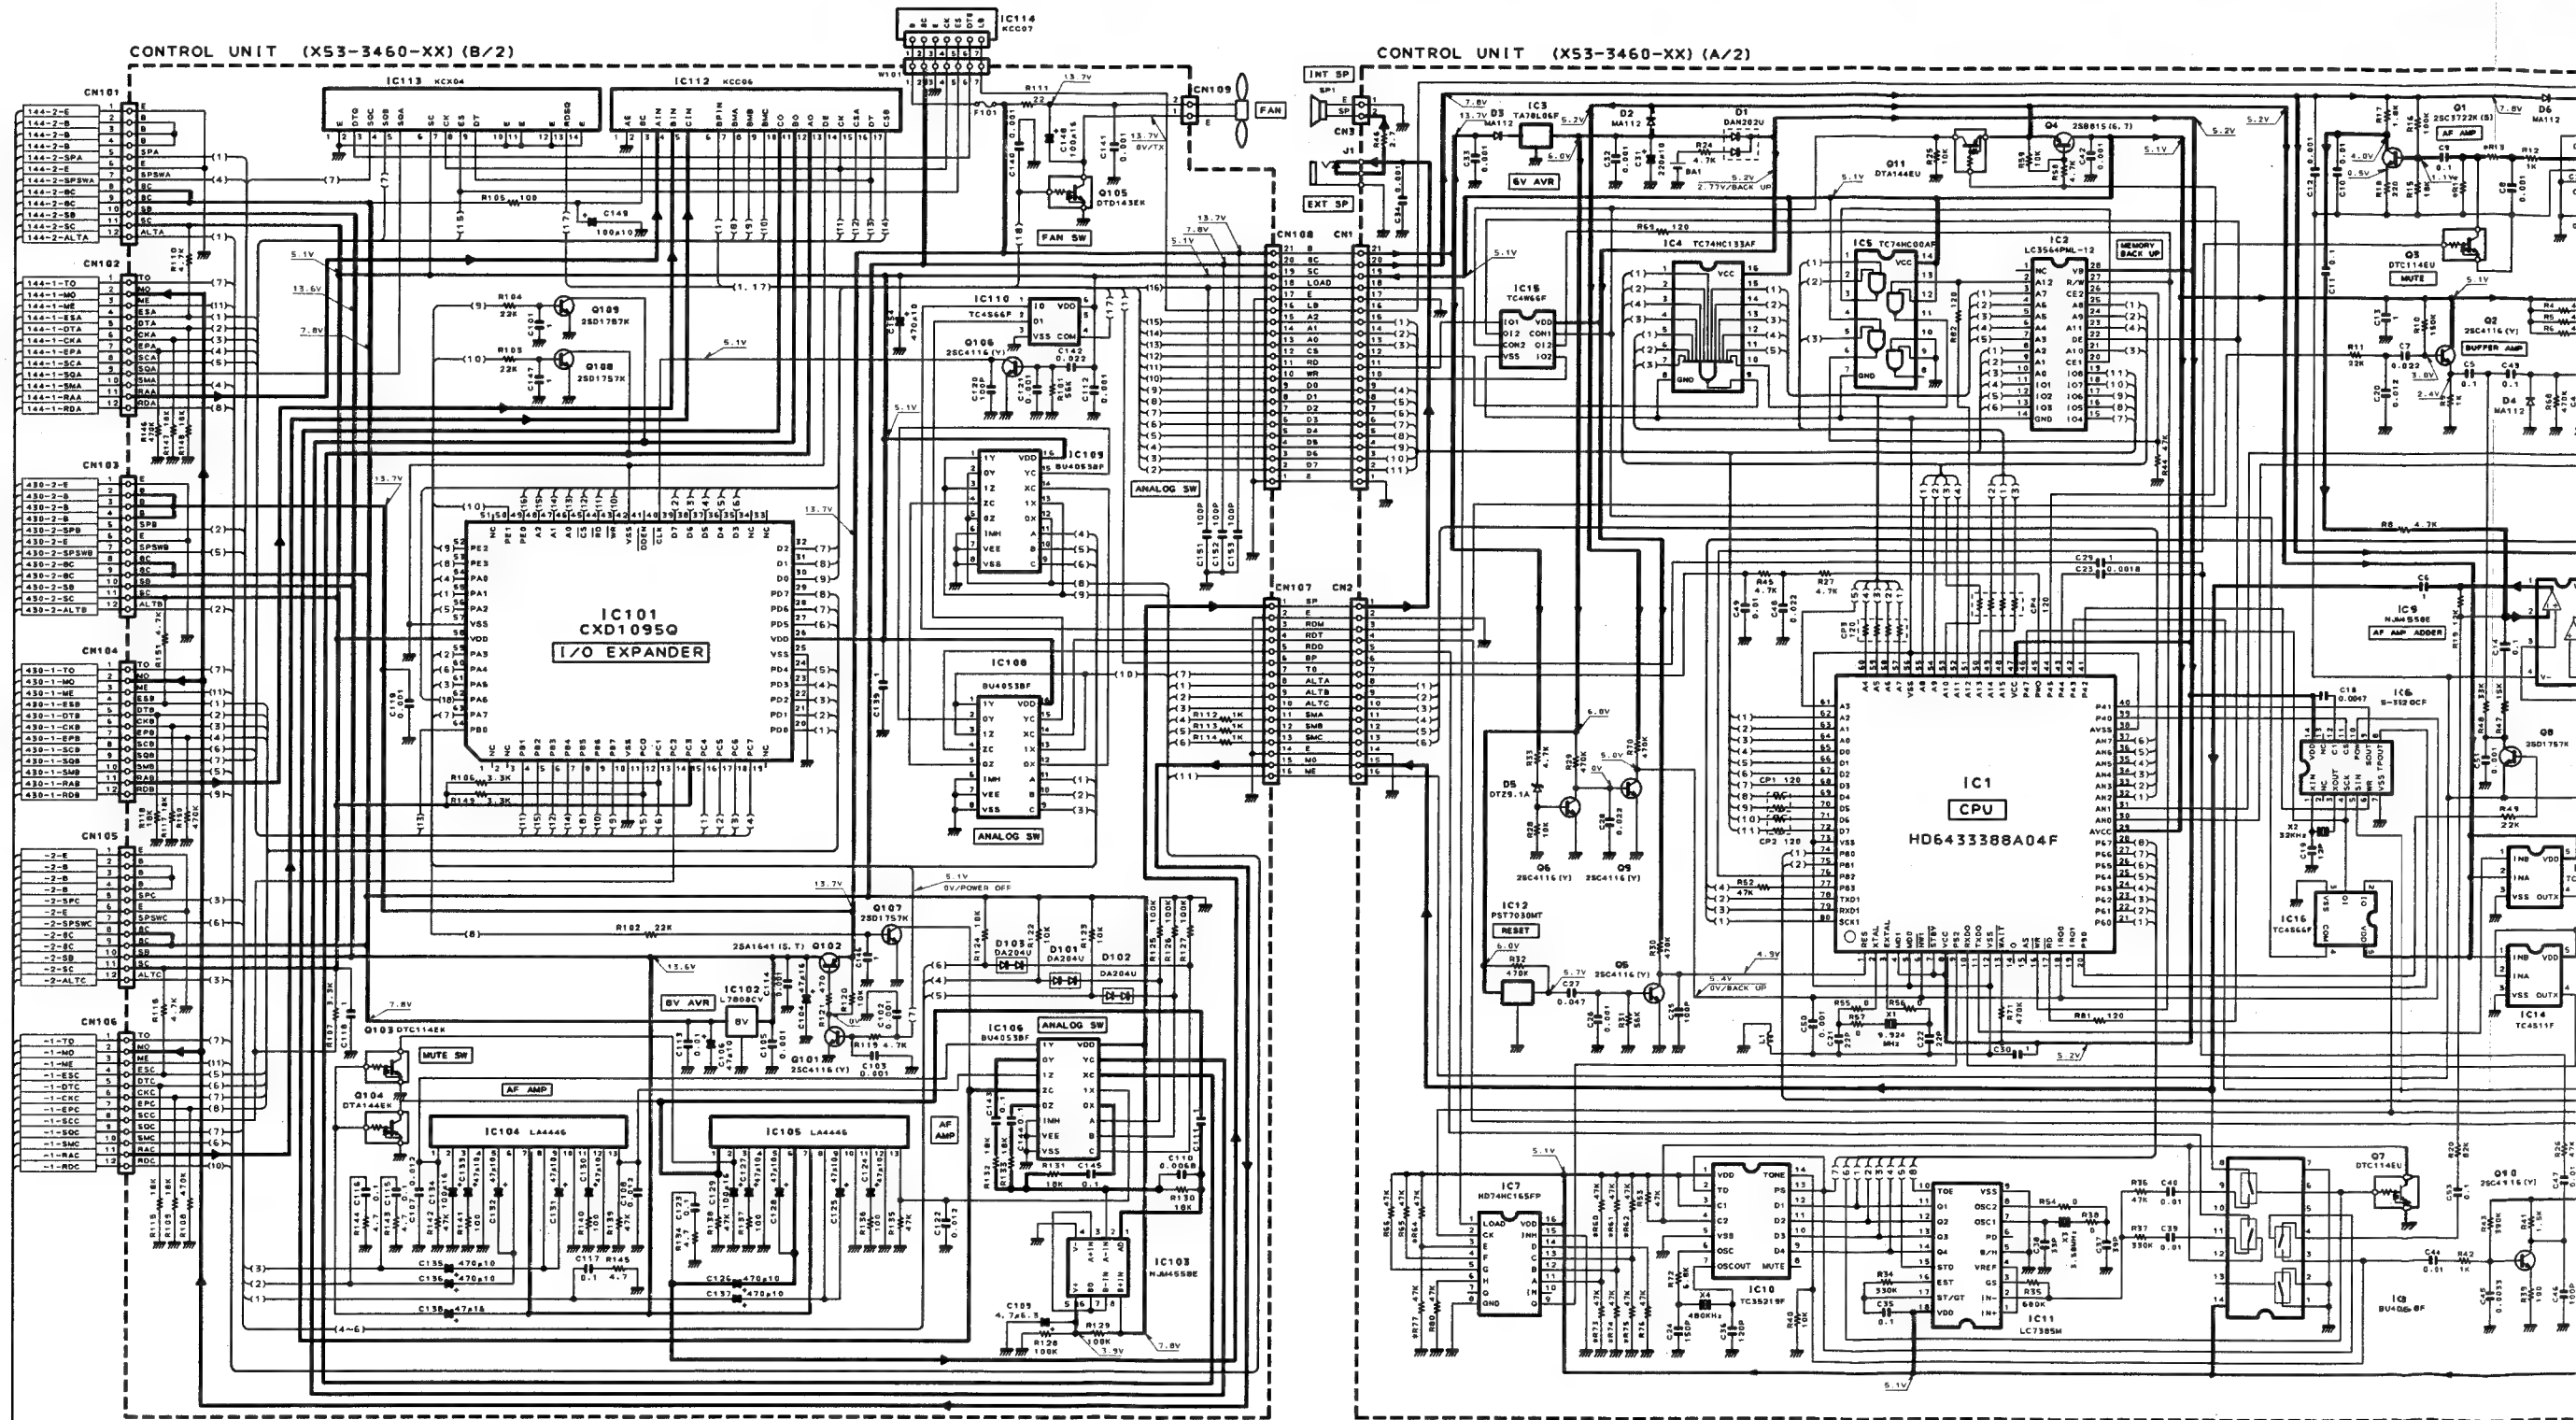

X53- B/2

IC101	CXD10950	Q101	2SC4116 (Y)
IC102	L7808CV	Q102	2SA1641 (S, T)
IC103	NJA4558E	Q103	DTC114EK
IC104, 105	LA4446	Q104	DTA144EK
IC106, 108, 109	BU4053BF	Q105	DTD143EK
IC110	TC4566F	Q106	2SC4116 (Y)
IC112	KCC06	Q107, 108, 109	2SD1757K
IC113	KCC04		
IC114	KCC07	D101-103	DA204U

X53-346X-XX





TYPE	ABB	UNIT	R13	R14	R60	R61	R62	R64	R73	R74	R75	R77
TM-742A, 942A	K, P	0-11	3.3K	3.9K	X	X	X	O	O	O	O	X
TM-742A, 942A	M	0-21	3.3K	3.9K	X	O	X	O	X	O	X	O
TM-742A	M2	0-22	3.9K	3.3K	O	X	O	X	O	X	X	O
TM-742E	E	2-71	560	8.2K	X	X	O	O	O	O	X	X
TM-742E	E2	2-72	560	8.2K	O	X	O	X	X	O	X	O

O: USED X: NOT USED

X53- A/2

IC1	HD6433388A04F	IC8	BU4066BF	Q1	2SC3722K (S)	D1	DAN202U
IC2	LC3564PML-12	IC9	NJA4558E	Q2, 5, 6, 9, 10	2SC4116 (Y)	D2, 3, 4, 6	MA112
IC3	TA78L06F	IC10	TC35219F	Q3, 7	DTC114EK	D5	DT29.1A
IC4	TC74HC133AP	IC11	LC73585M	Q4	258815 (6, 7)		
IC5	TC74HC00AF	IC12	PS77030MT	Q8	2SD1757K		
IC6	S-3520CF	IC13, 14	TC4511F	Q11	DTA144EK		
IC7	HD74HC165PF	IC15	TC4W66F				
		IC16	TC4566F				



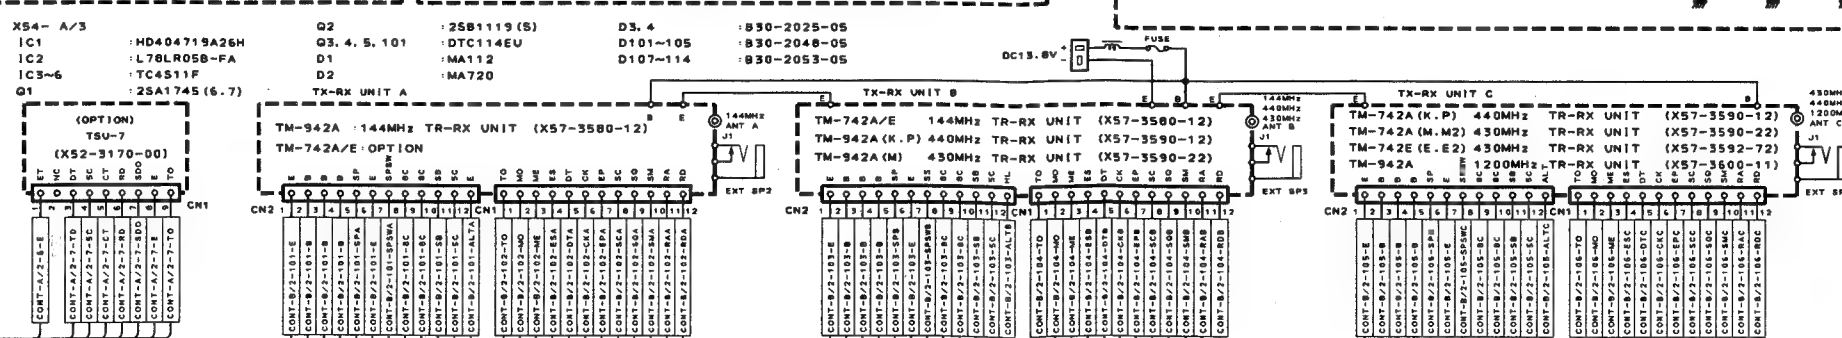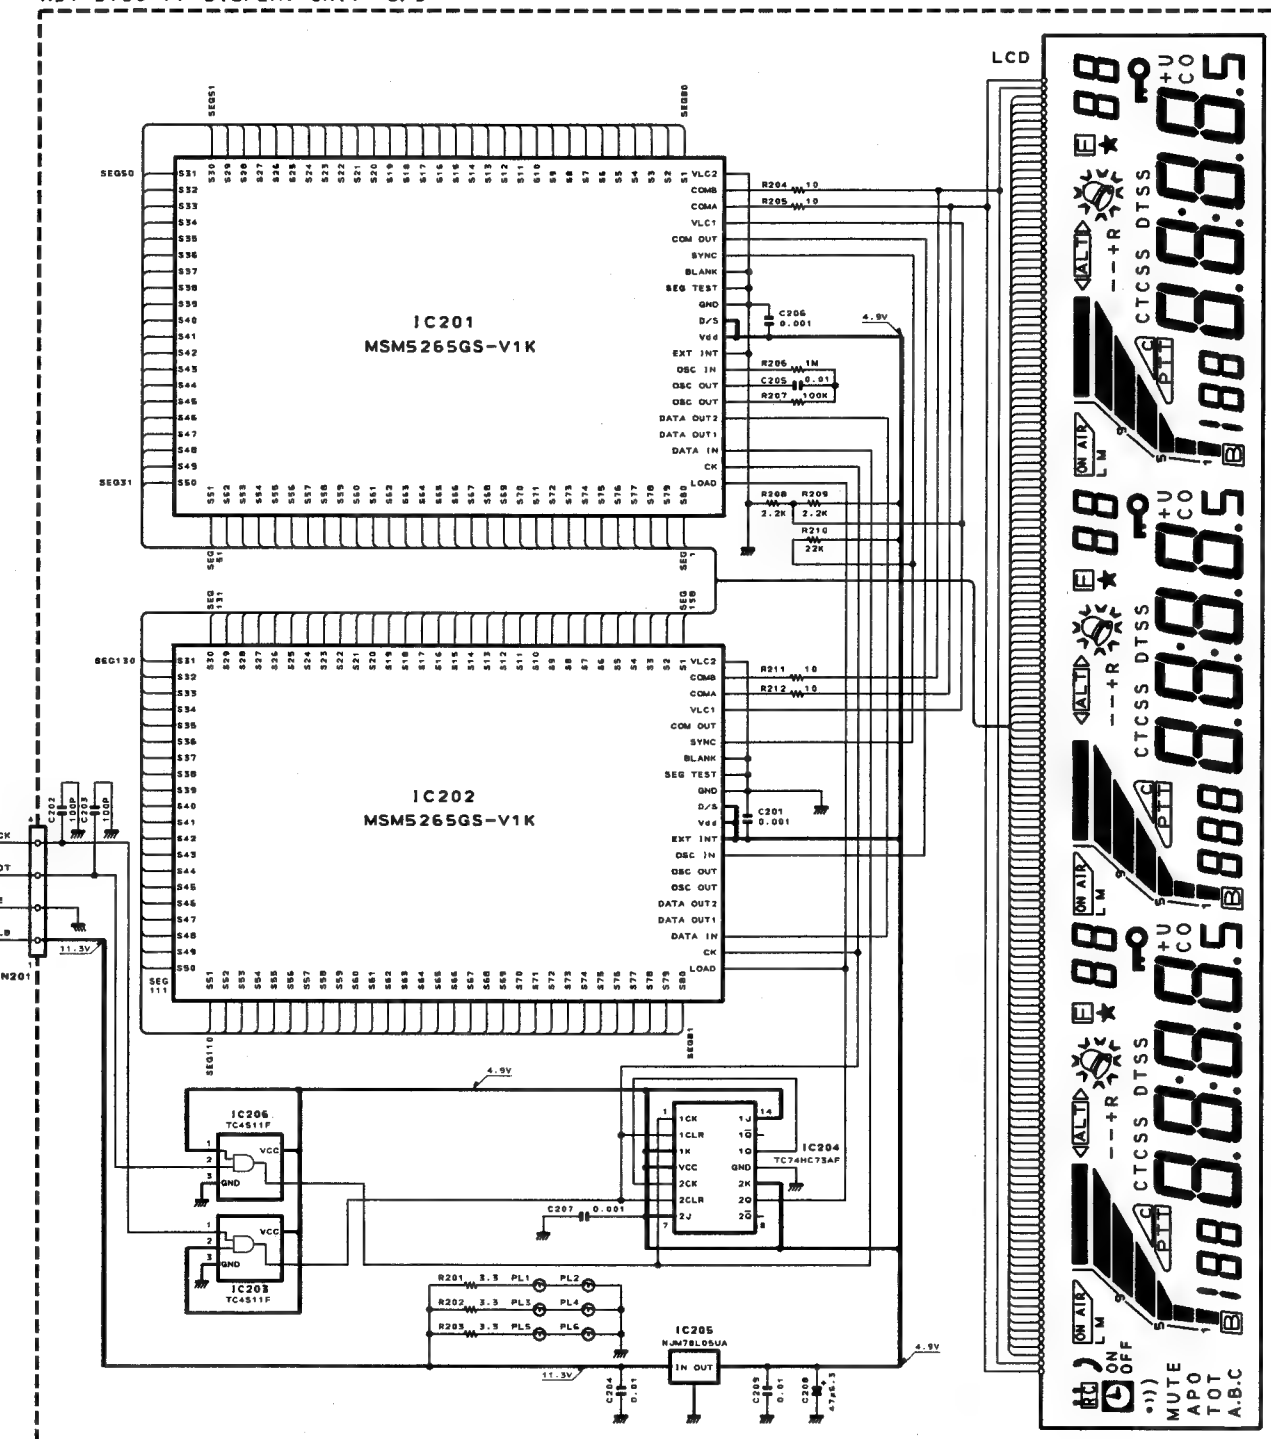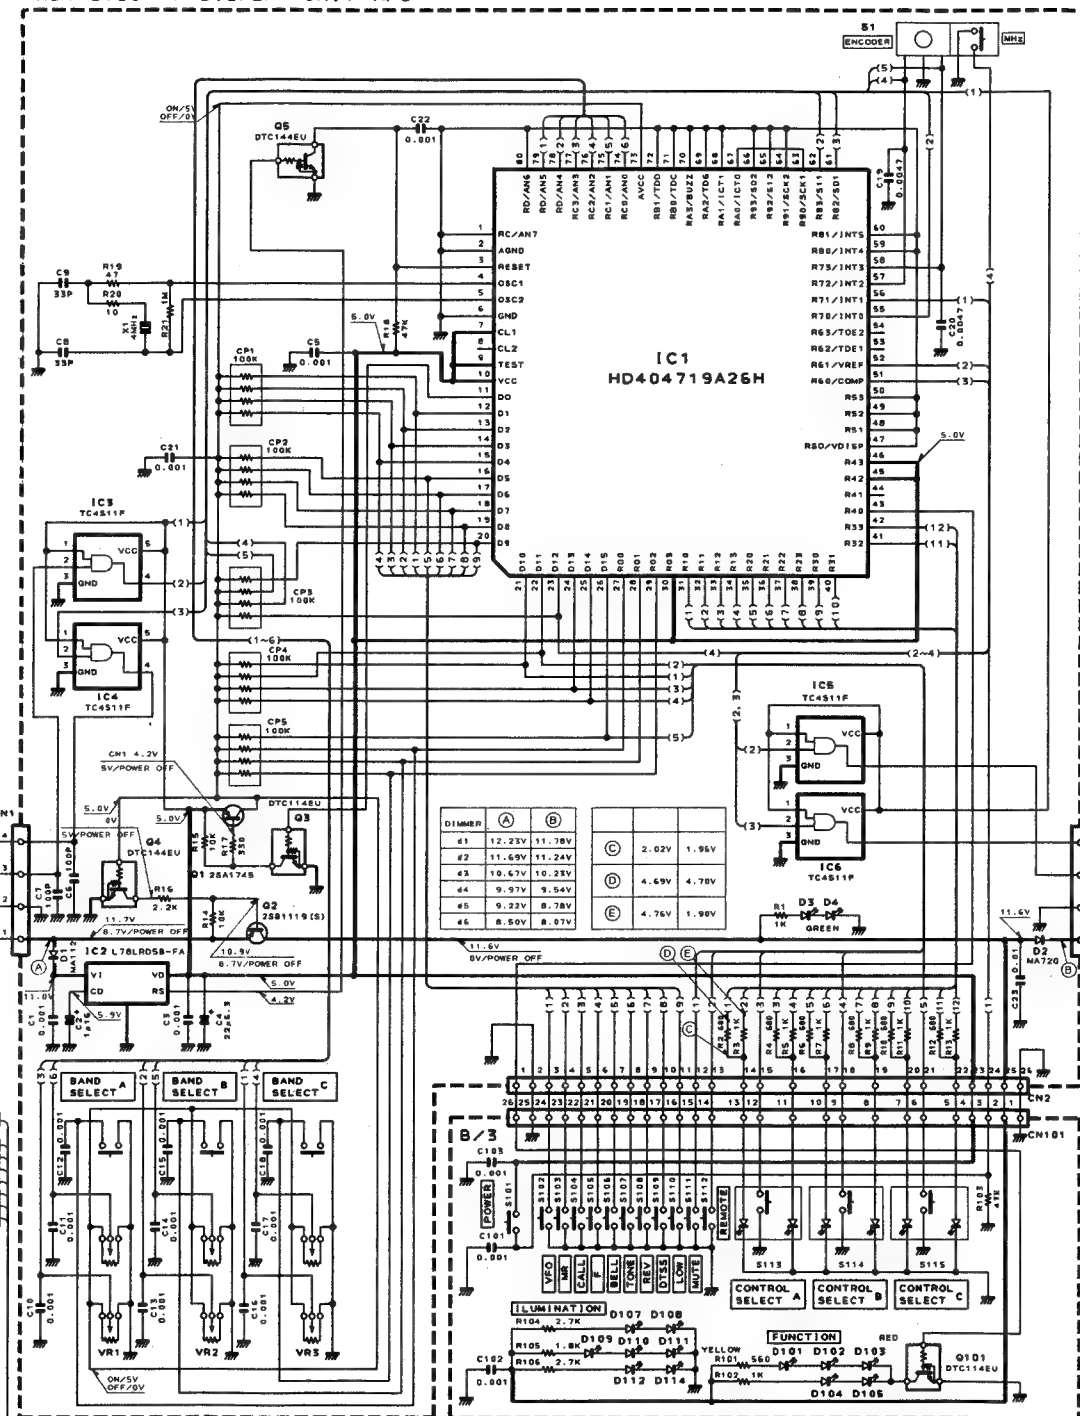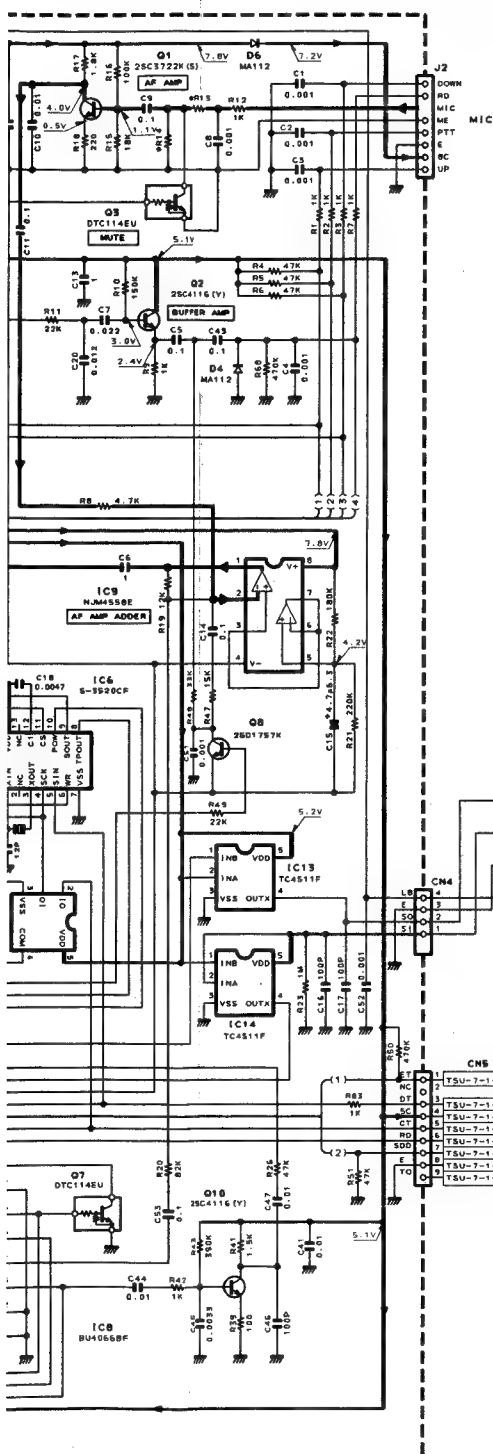





# TM-742 A/742 E/942 A

1200M TX-RX UNIT (X57-3600-11): UT-1200 (M)

Component side view

IC2:KCD04 IC3:KCC03 IC4:KCA04 IC5:BUA094BF IC6:LA5009M IC7:KCB09 IC8:KCB10 IC9:KCC04 IC10:M67711 IC11:KCH02 IC12:NJM78L05UA  
Q1:MGF1502 Q2:2SC4095(R47, 6) Q3:3SK184(S) Q5:FMA5 Q6:2SC3356 Q7:2SC3120 Q8:19:2SA1362(Y) Q9:2SB1302S Q10:DTIC144WK  
Q11:FMW1 Q12:13:23:2SC2712(Y) Q15~17:DTIC144EU Q18:2SD1757(K) Q20:DTIC124EK Q21, 22:2SC4226(R23, 24) Q24:2SD1760(Q) Q25:FMG1 Q26:2SJ106(GR)  
Q27:DTA114EK Q28:DTIC114EK  
D1:MA862 D3:MA716 D4, 6:1SS193 D5:02C262(X Y) D7:1SS187 D8:02C212(X Y) D9:HSK151 D10~13:M808 D14:DSA3A1 D15:02C236(Y, Z)  
D17:DAP202U D19:M808



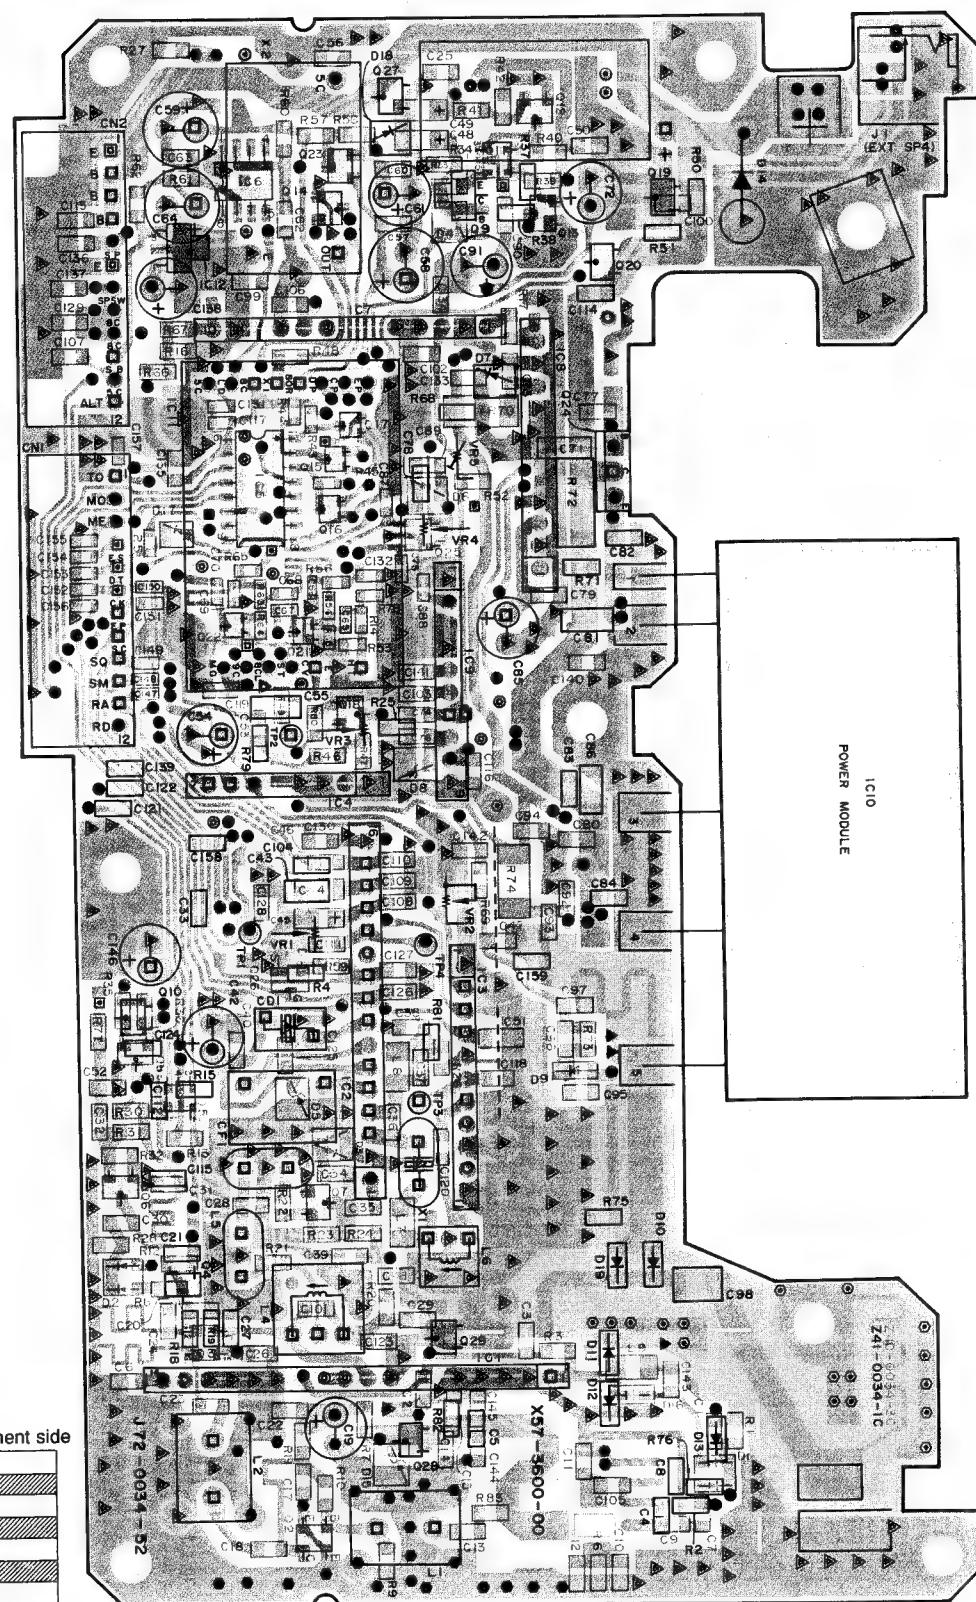



DTA114EK  
DTC124EK  
DTC144EU  
DTC144WK  
2SA1362  
2SC2712  
2SC3120  
2SC3356  
2SD1757K



FMG1  
FMW1

- Connect A and B
- Connect A and C
- Connect A and D
- Connect B and C
- ▲ Connect B and D
- Connect A and B, C
- Connect A and B, D
- Connect A and C, D
- Connect B and C, D
- ▲ Connect A and B, C, D
- A Only
- B Only
- ▲ C Only
- No mark does not Connected

## PC BOARD VIEW



IC2:KCD04 IC3:KCC03 IC4:KCA04 IC5:BUA094BF IC6:LA5009M IC7:KCB09 IC8:KCB10 IC9:KCC04 IC10:M67711 IC11:KCH02 IC12:NJM78L05UA  
Q1:MGF1502 Q2:2SC4095(R47, 6) Q3:3SK184(S) Q5:FMA5 Q6:2SC3356 Q7:2SC3120 Q8:19:2SA1362(Y) Q9:2SB1302S Q10:DTIC144WK  
Q11:FMW1 Q12:13:23:2SC2712(Y) Q15~17:DTIC144EU Q18:2SD1757(K) Q20:DTIC124EK Q21, 22:2SC4226(R23, 24) Q24:2SD1760(Q) Q25:FMG1 Q26:2SJ106(GR)  
Q27:DTA114EK Q28:DTIC114EK  
D1:MA862 D3:MA716 D4, 6:1SS193 D5:02C262(X Y) D7:1SS187 D8:02C212(X Y) D9:HSK151 D10~13:M808 D14:DSA3A1 D15:02C236(Y, Z)  
D17:DAP202U D19:M808

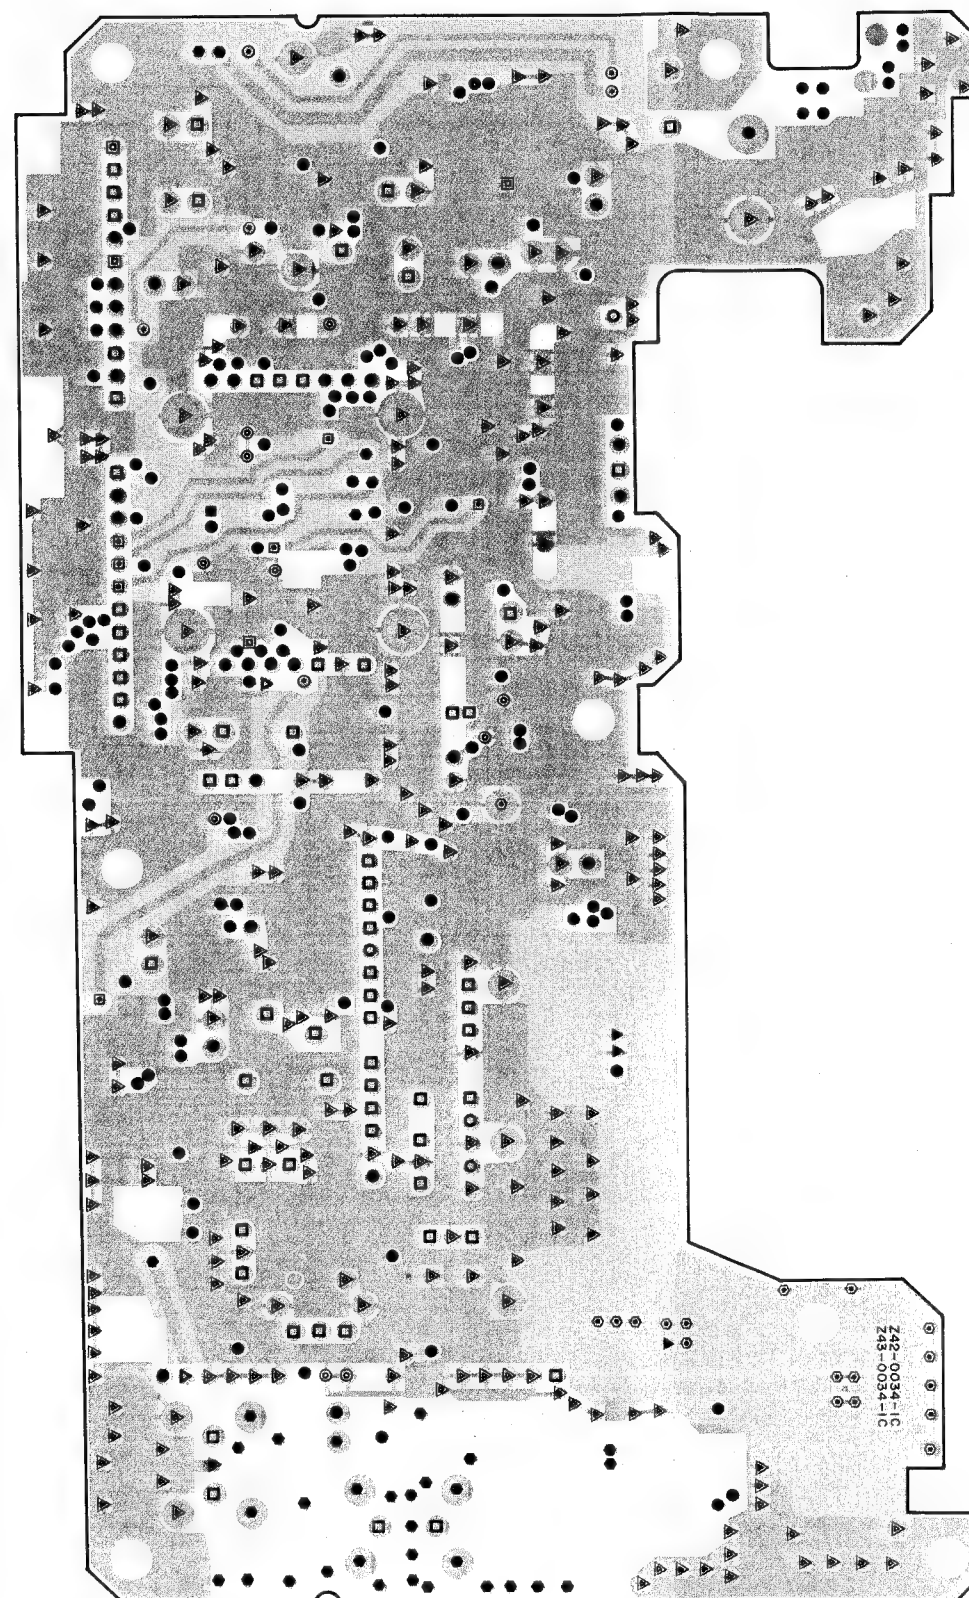






# BOARD VIEW

1200M TX-RX UNIT (X57-3600-11): UT-1200 (M)

Foil side view

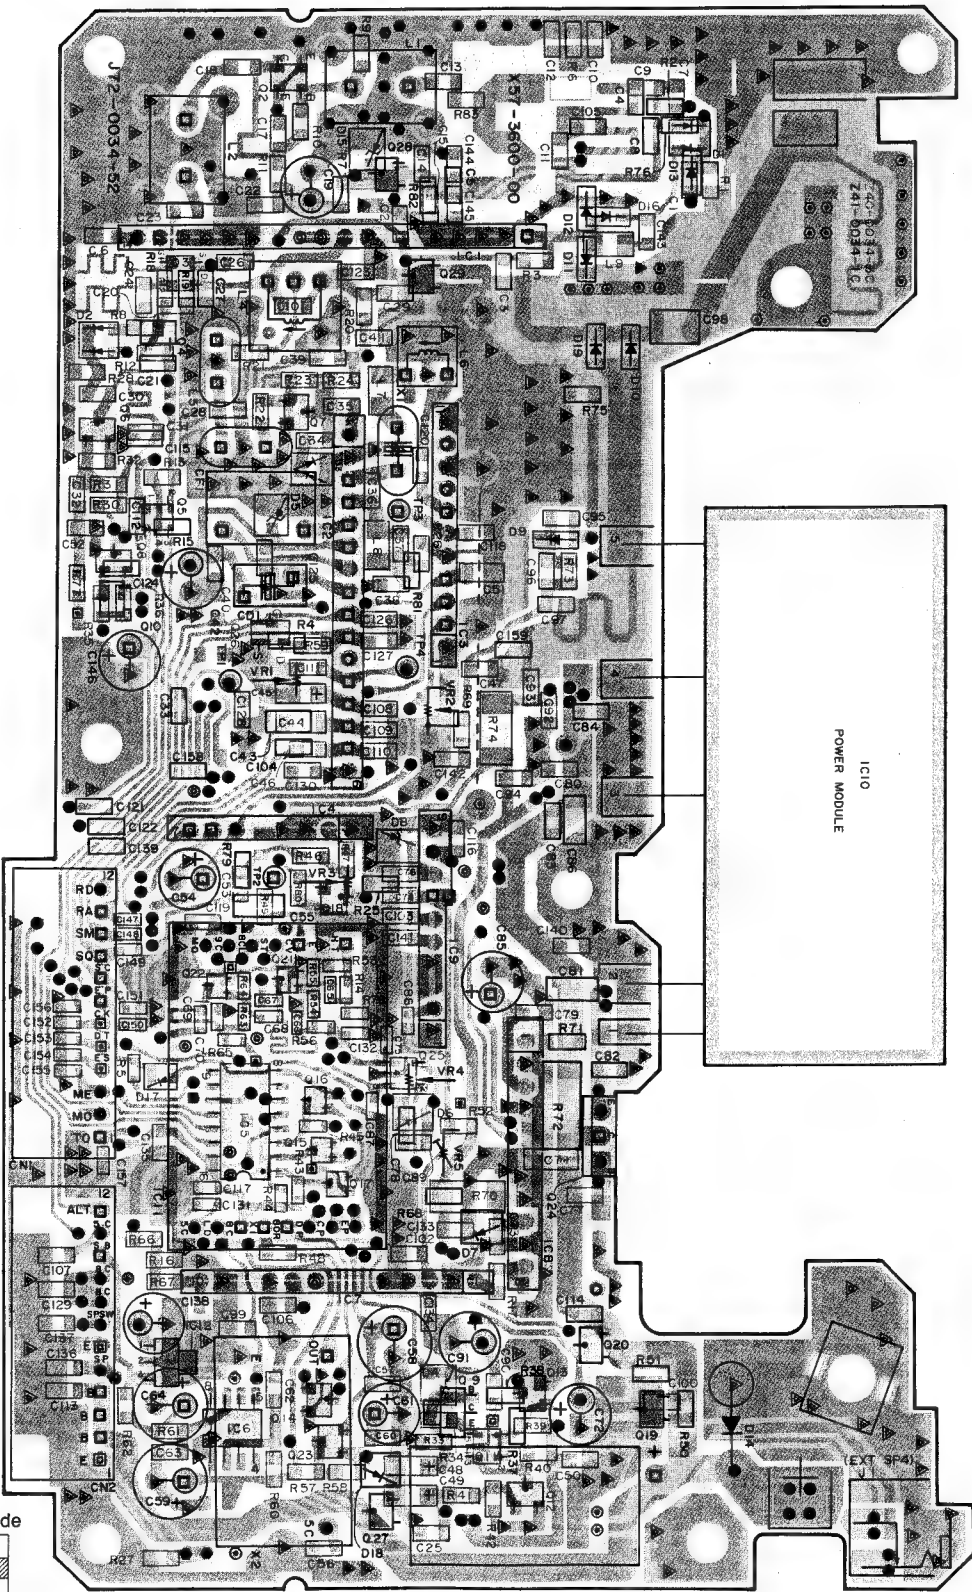


IC2:KCD04 IC3:KCA03 IC4:KCA04 IC5:BU4094BF IC6:LA5009M IC7:KCB09 IC8:KCB10 IC9:KCC04 IC10:M67711 IC11:KCH02 IC12:NJM78L05UA  
Q1:MGE1502 Q2:2SC4095(R47, 6) Q3:3SK184(S) Q5:FMA5 Q6:2SC3356 Q7:2SC3120 Q8, 19:2SA1362(Y) Q9:2SB1302S Q10:DTIC144WK  
Q11:FMW1 Q12, 13, 23:2SC2712(Y) Q15~17:DTIC144EU Q18:2SD1757(K) Q20:DTIC124EK Q21, 22:2SC4226(R23, 24) Q24:2SD1760(Q) Q25:FMG1 Q26:2SJ066(GR)  
Q27:DTA114EK Q28:DTIC114EK  
D1:MA862 D3:MA716 D4, 6:1SS193 D5:02CZ62(X Y) D7:1SS187 D8:02CZ12(X Y) D9:HSK151 D10~13:M808 D14:DSA3A1 D15:02CZ36(Y, Z)  
D17:DAP202U D19:M808



BU4094BF


- Connect A and B
- Connect A and C
- Connect A and D
- Connect B and C
- ▲ Connect B and D
- ◆ Connect A and B, C
- ◇ Connect A and B, D
- ⊙ Connect A and C, D
- ⊠ Connect B and C, D
- △ Connect A and B, C, D
- A Only
- B Only
- △ C Only
- No mark does not Connected

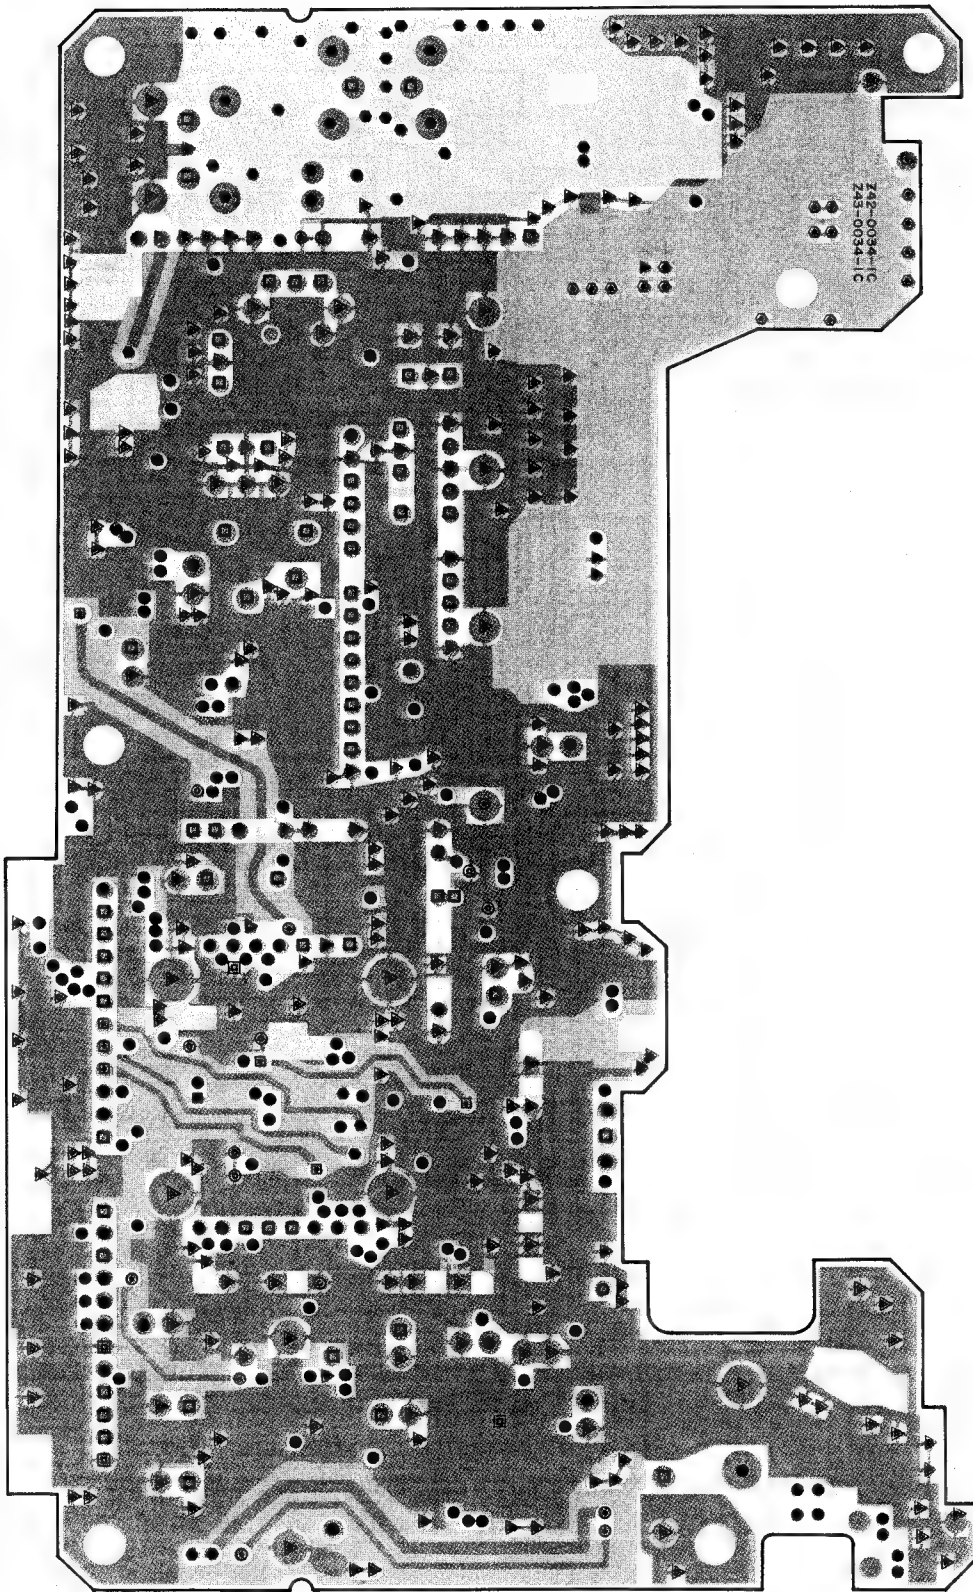

# SCHEMATIC DIAGRAM

1200M TX-RX UNIT (X57-3600-00)

— Signal line ..... Control line — Common DC line

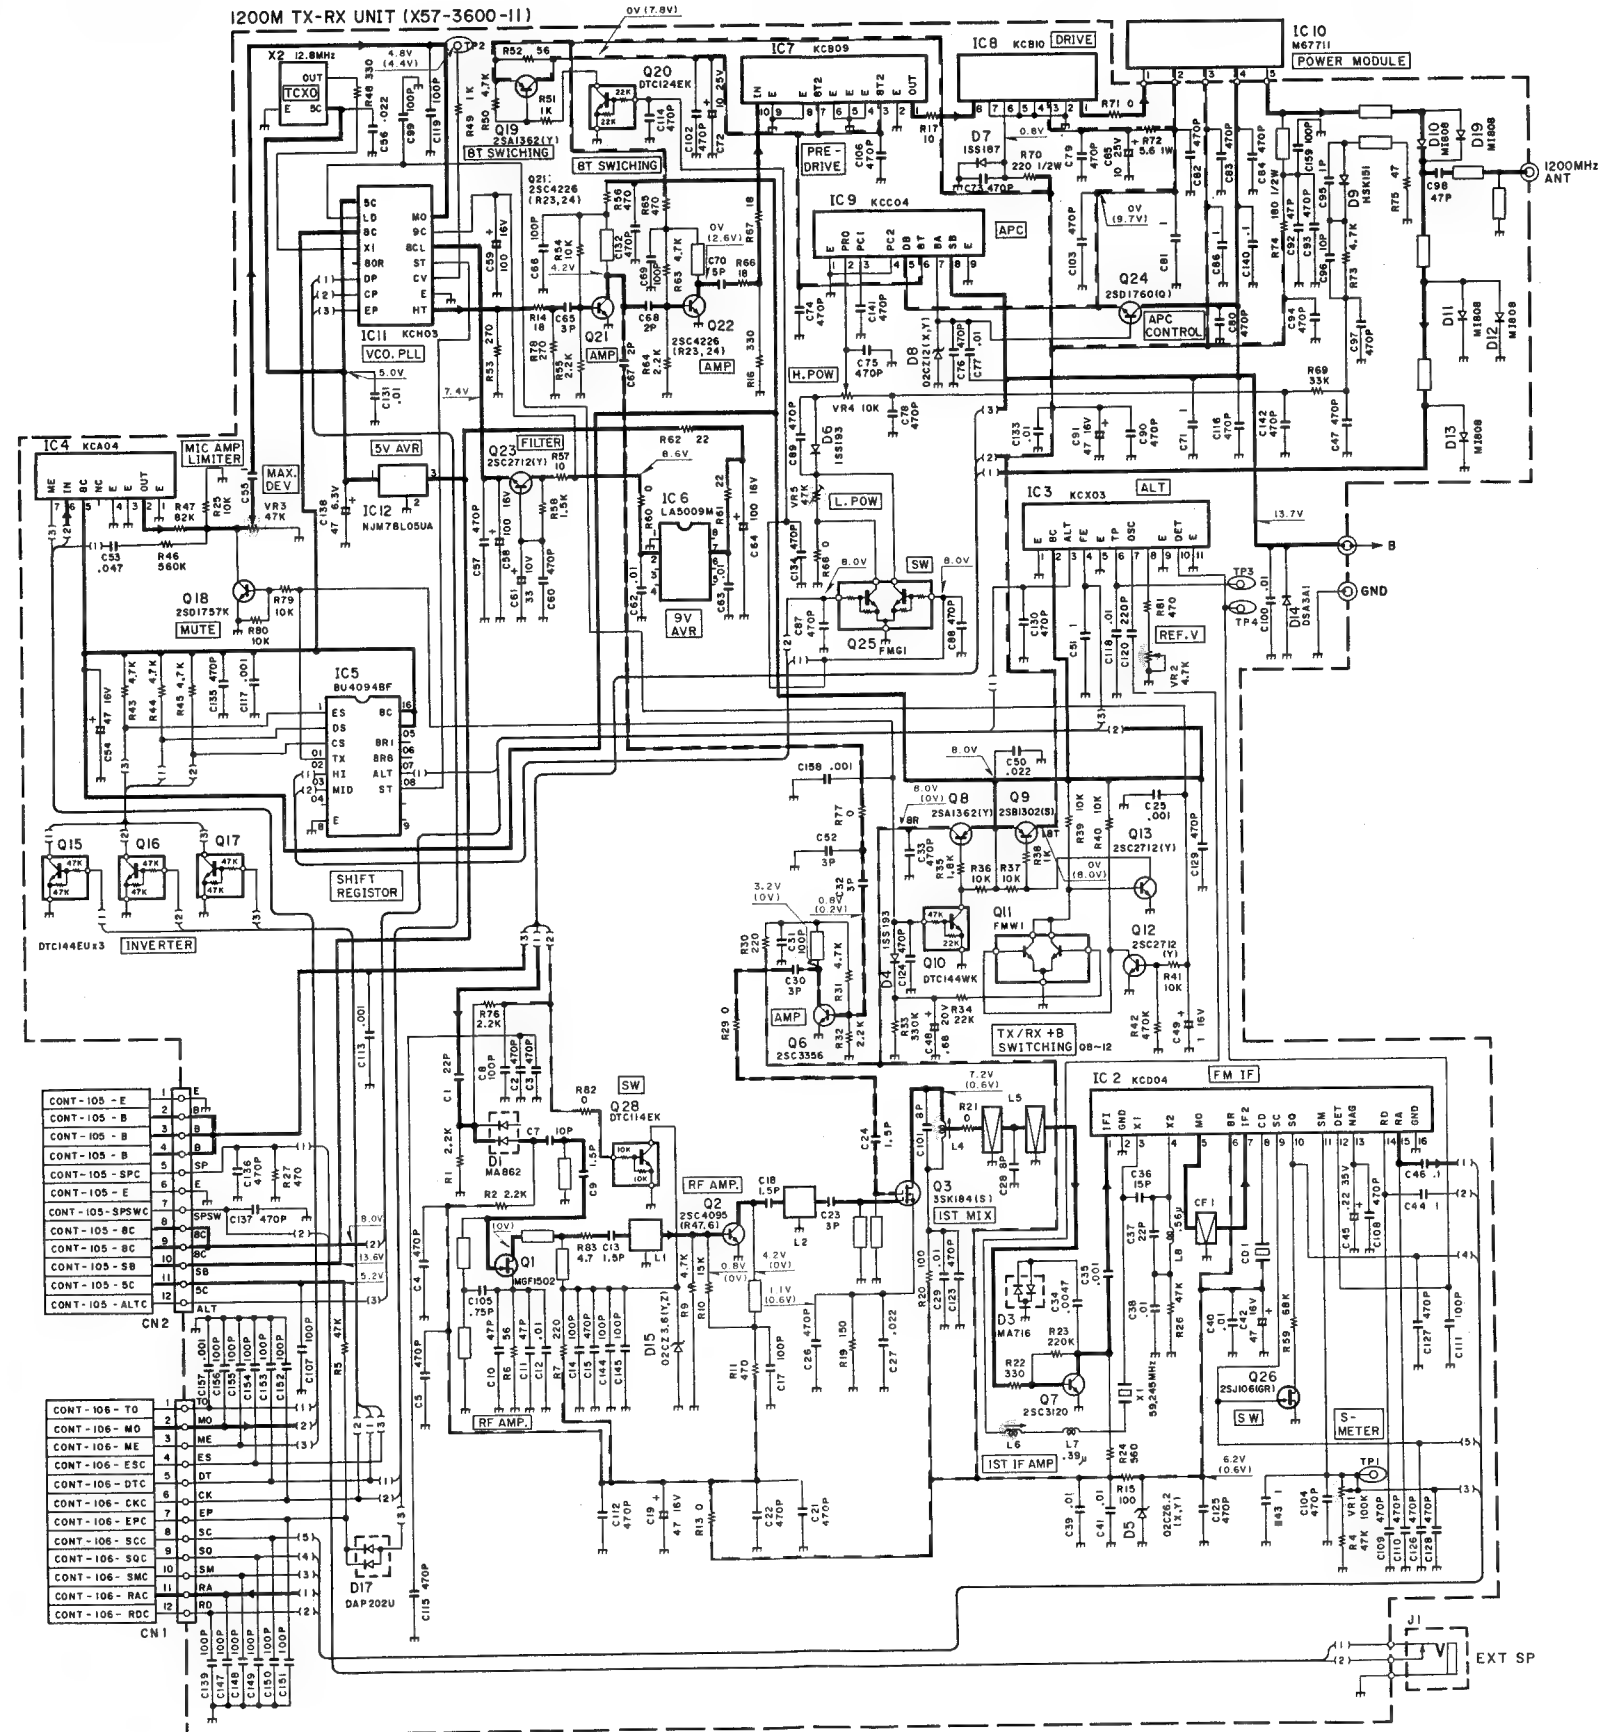




# TM-742A/742E/942A

430/440M TX-RX UNIT (X57-359X-XX) 0-12: 742A (K, P) 942A (M) 0-22: 742A (M, M2)  
2-72: 742E (E, E2, E3) 942A (K, P)

Component side view

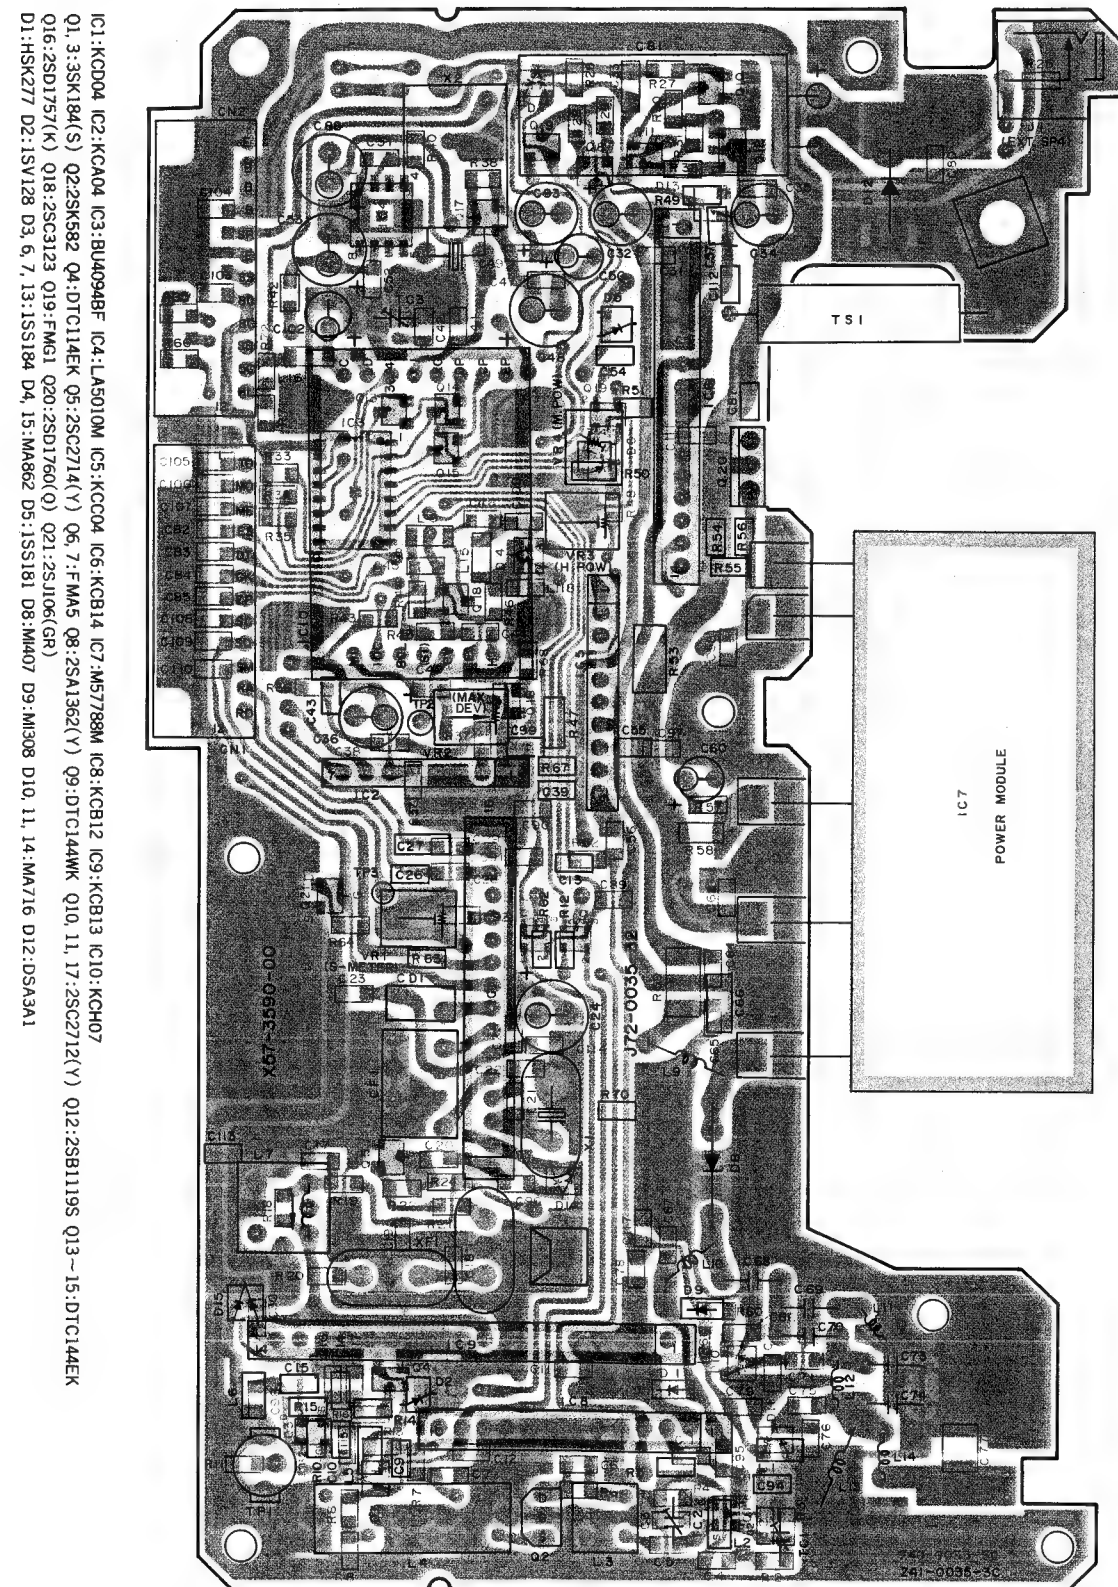


A pattern B pattern

## PC BOARD VIEW

430/440M TX-RX UNIT (X57-359X-XX) 0-12: 742A (K, P) 942A (M) 0-22: 742A (M, M2)  
2-72: 742E (E, E2, E3) 942A (K, P)


Foil side view

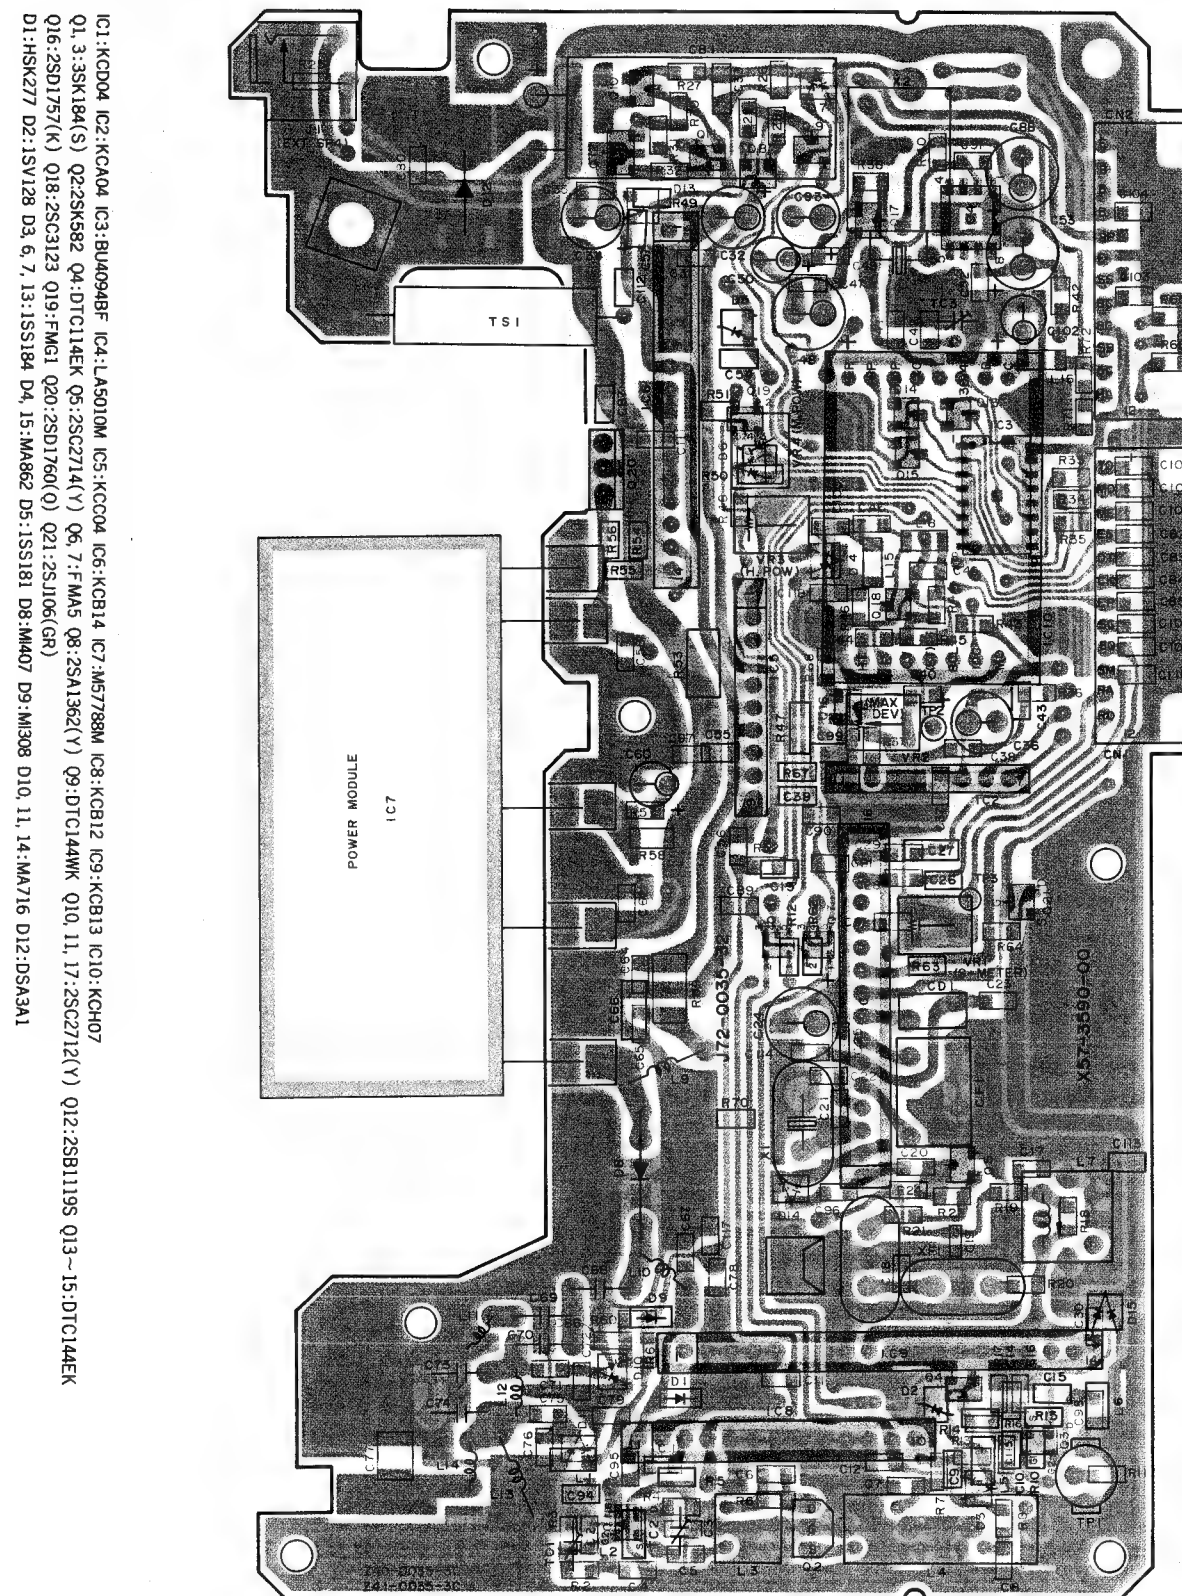

A pattern B pattern

# SCHEMATIC DIAGRAM

430/440M TX-RX UNIT (X57-3590-XX)

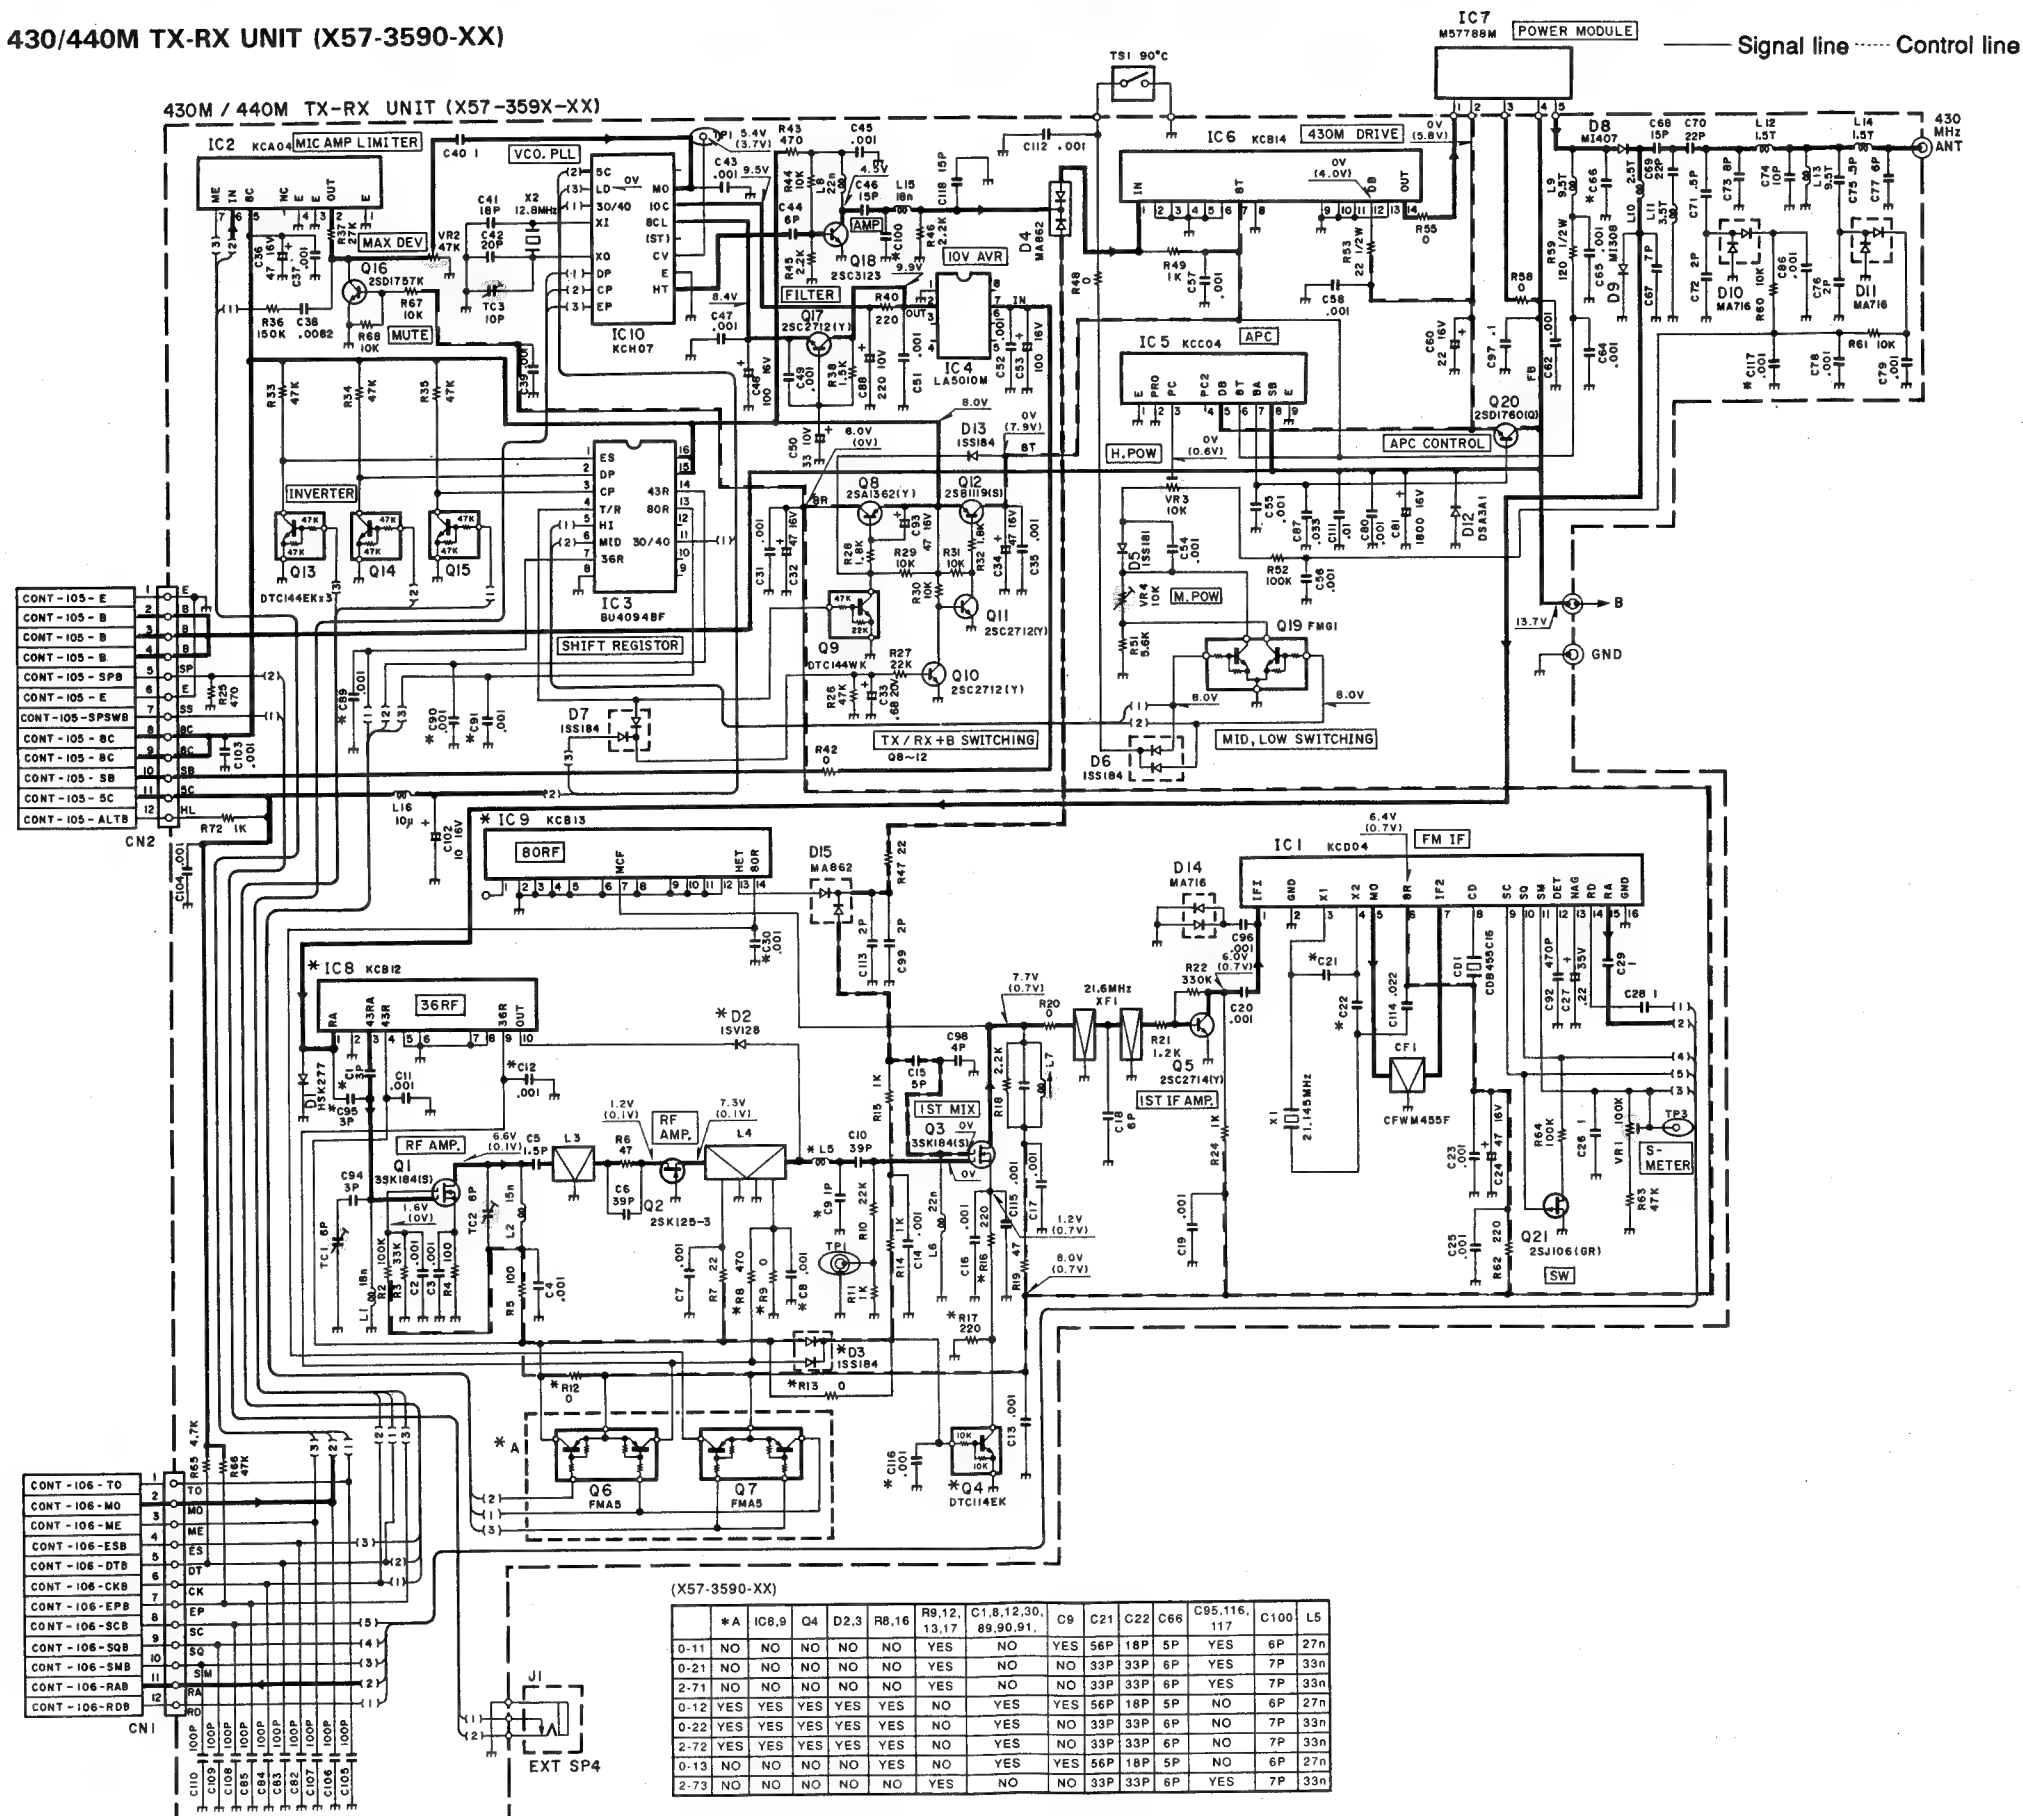





# TM-742 A/742 E/942 A

## PC BOARD VIEW

220M TX-RX UNIT (X57-3810-10)  
Component side view

220M TX-RX UNIT (X57-3810-10)  
Foil side view

IC1:BU4094BF IC1:XRU4094BF IC2:LA5009M IC3:KCD04 IC7:KCA04 IC8:KCB15 IC9:KCC04 IC10:M5777A IC11:KCH08  
Q1,2:3SK184(S) Q3,2:2SC2714(Y) Q10,Q20:2SA1362(Y) Q11:2SB1119S Q12:DTIC144WK Q13,14,21:2SC2712(Y) Q15-17:DTIC144EK Q18:2SD1757(K) Q19:2SK208(Y) Q22:FMG1 Q23:2SD1902R Q24:2SJ106(GR)  
D3,D5,D7,D20:1SV164 D11,12:1SS184 D13:DAN235(K) D14:1SS181 D15:M407 D16:M308 D17,18:1SS226 D19:DSA3A1

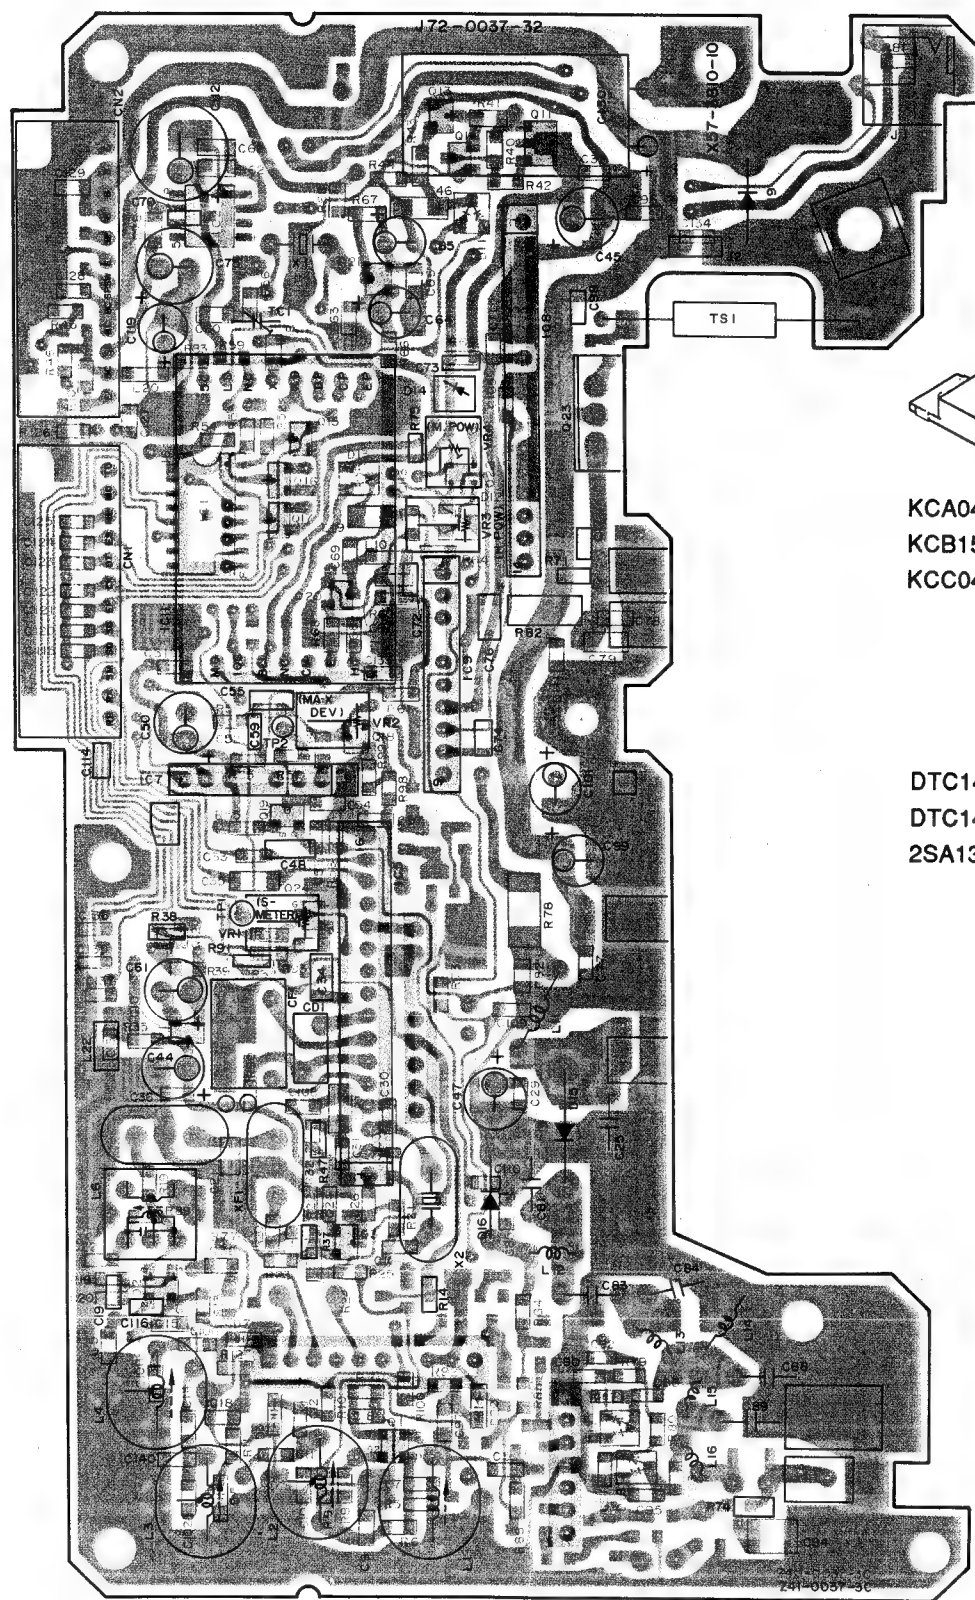


KCA04 KCD04  
KCB15 KCH08  
KCC04 2SD1902R




DTC144EK 2SC2712  
DTC144WK 2SC2714  
2SA1362 2SD1757



2SB1119S





FMG1




LA5009M


A pattern B pattern

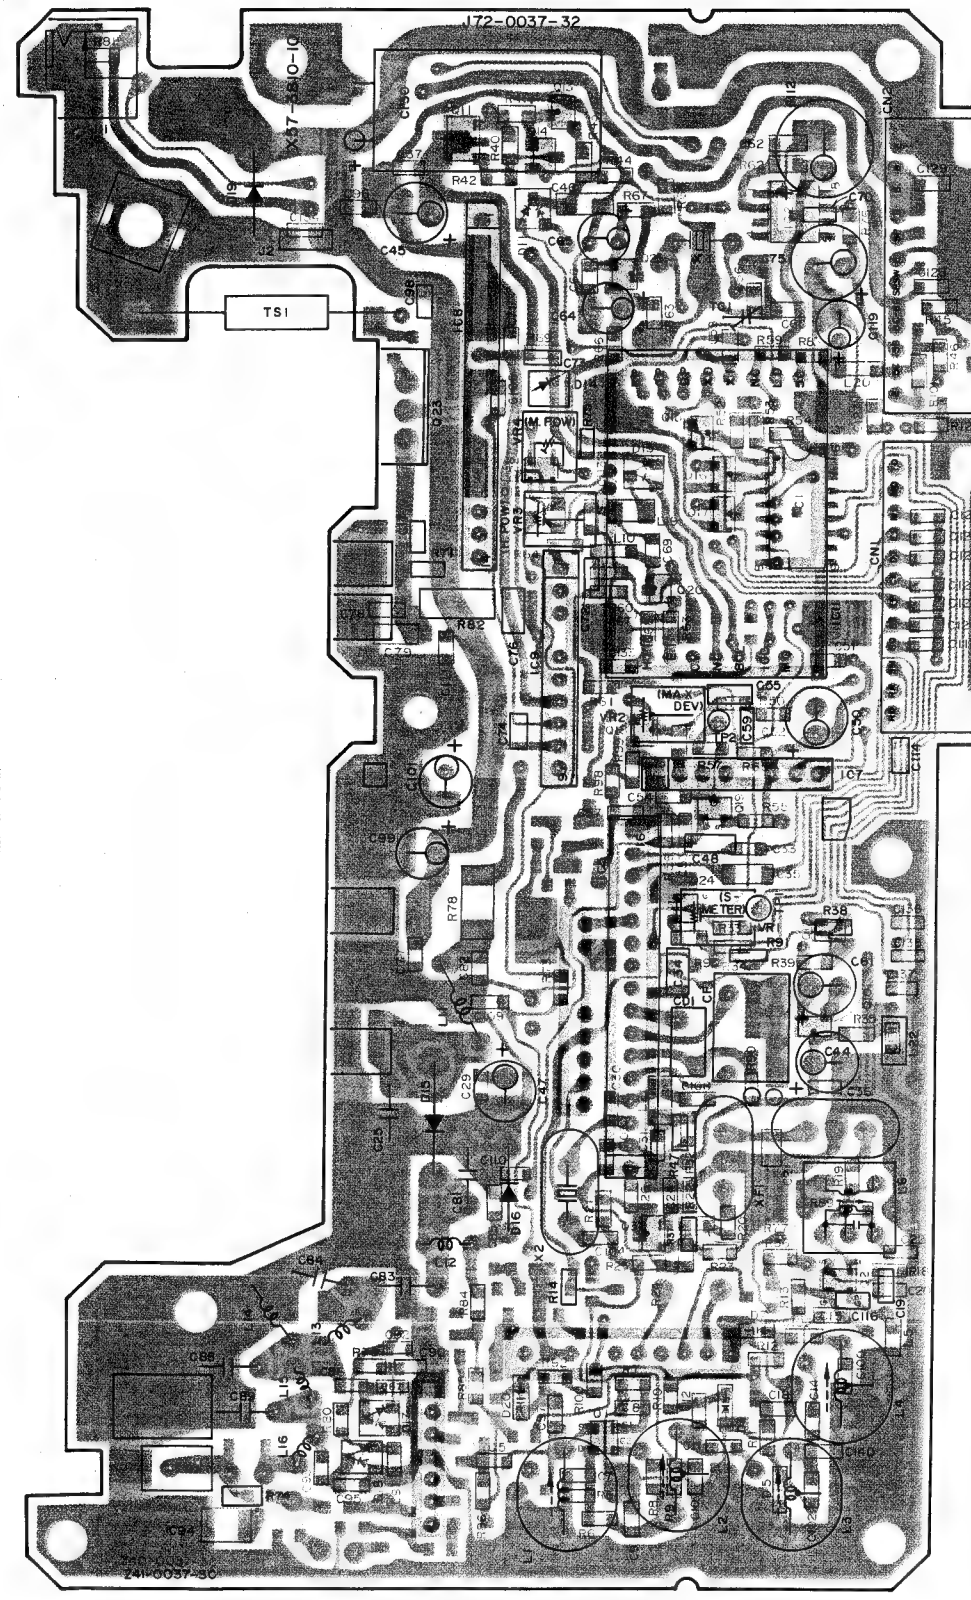

3SK184



BU4094BF




M5777A



2SK208

A pattern B pattern

# SCHEMATIC DIAGRAM

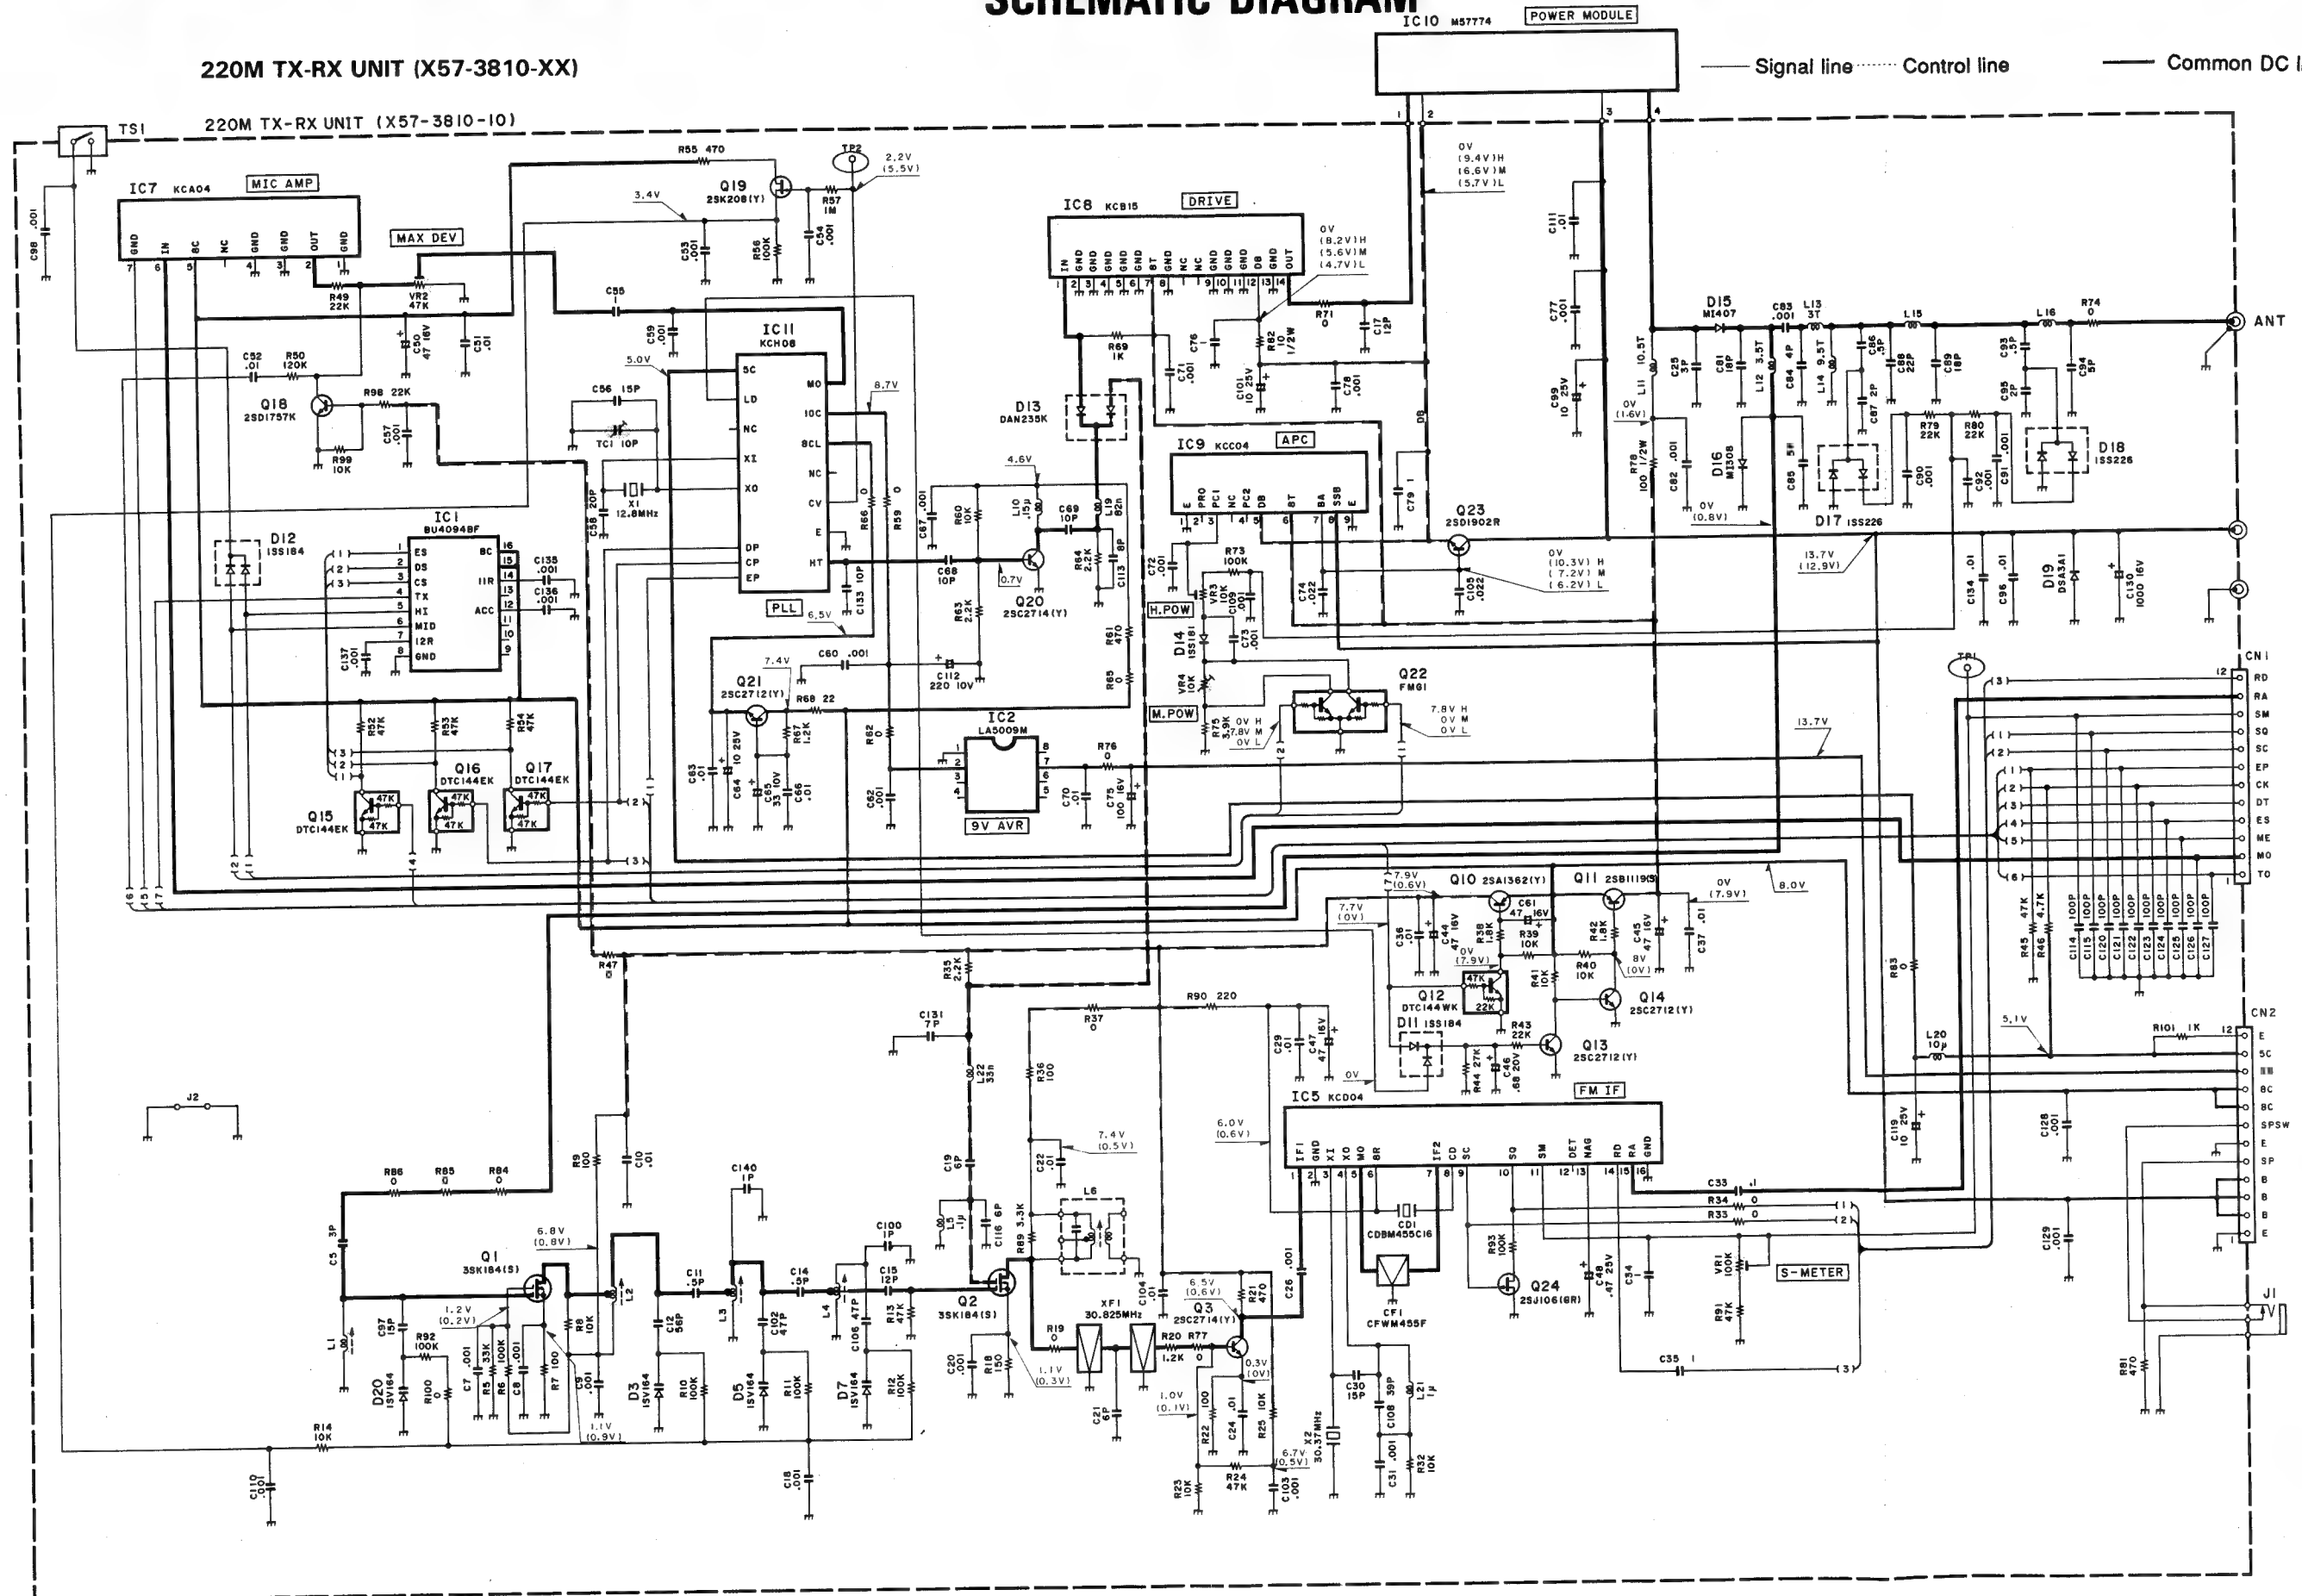





# TM-742 A/742 E/942 A

## PC BOARD VIEW

144M TX-RX UNIT (X57-3580-XX) 0-11: 942A 0-12: 742 A/E (K, P, E, E2, E3, M, M2)  
Component side view

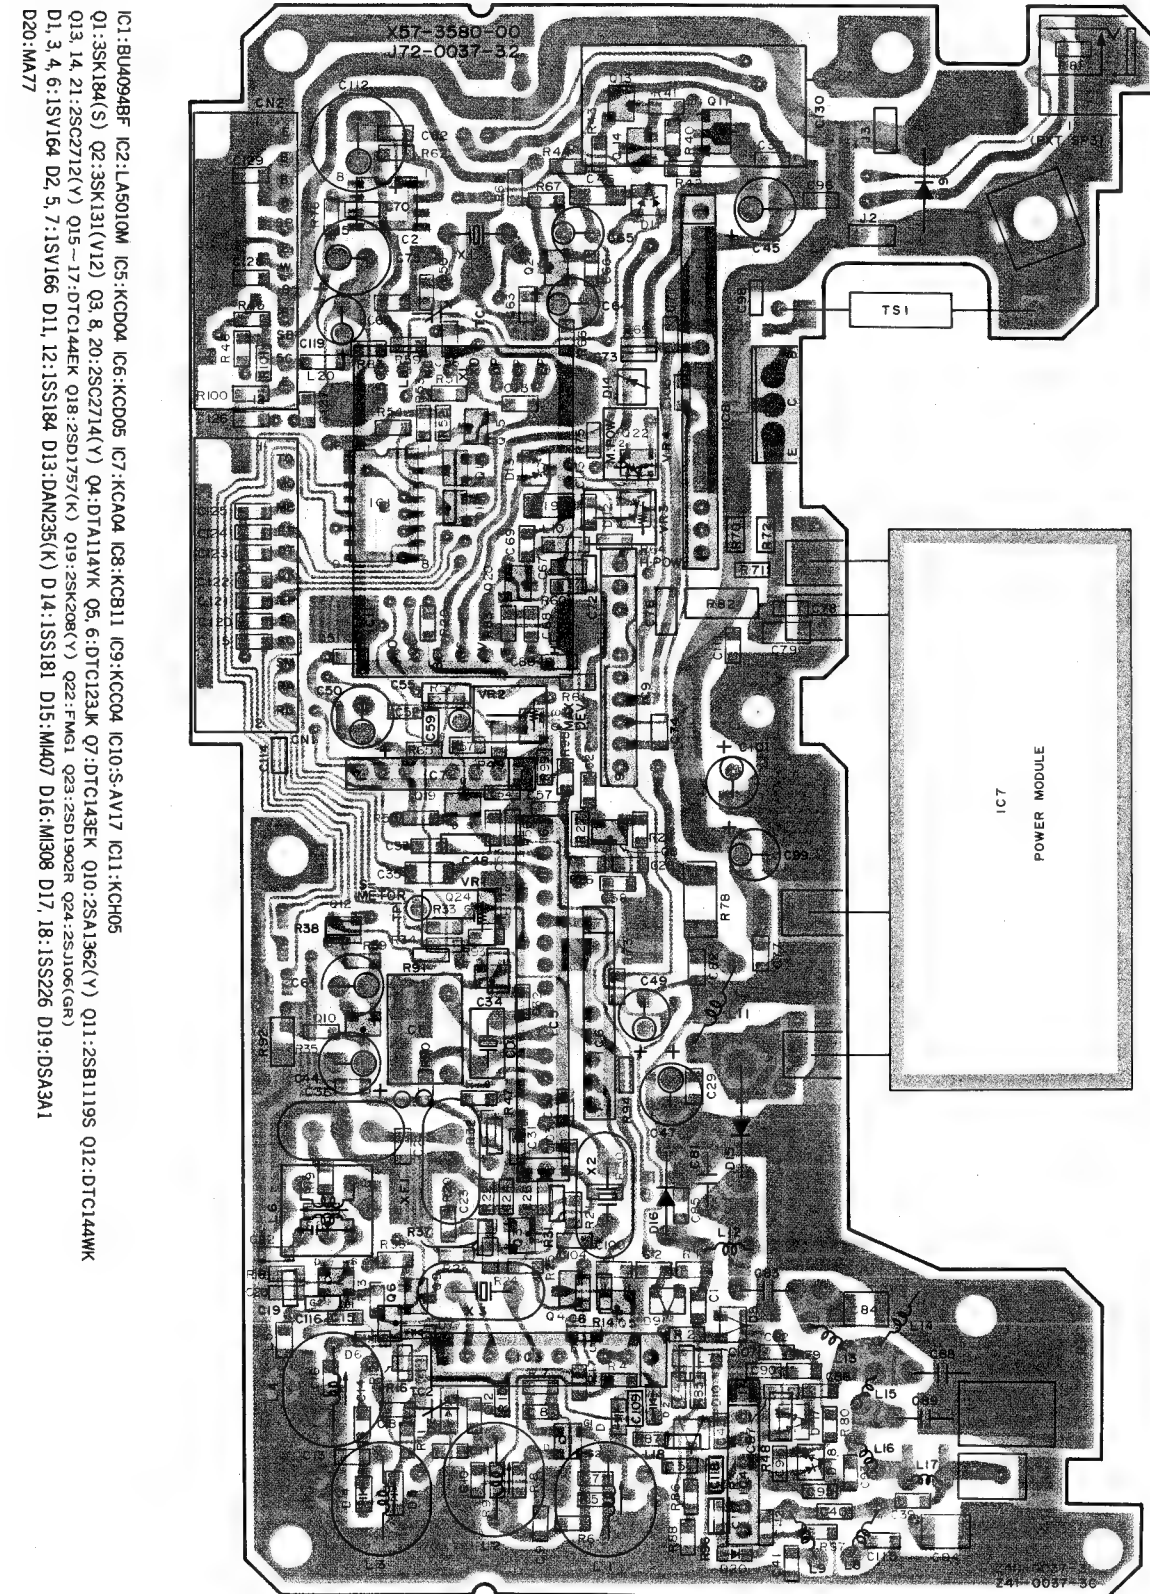

144M TX-RX UNIT (X57-3580-XX) 0-11: 942A 0-12: 742 A/E (K, P, E, E2, E3, M, M2)  
Foil side view

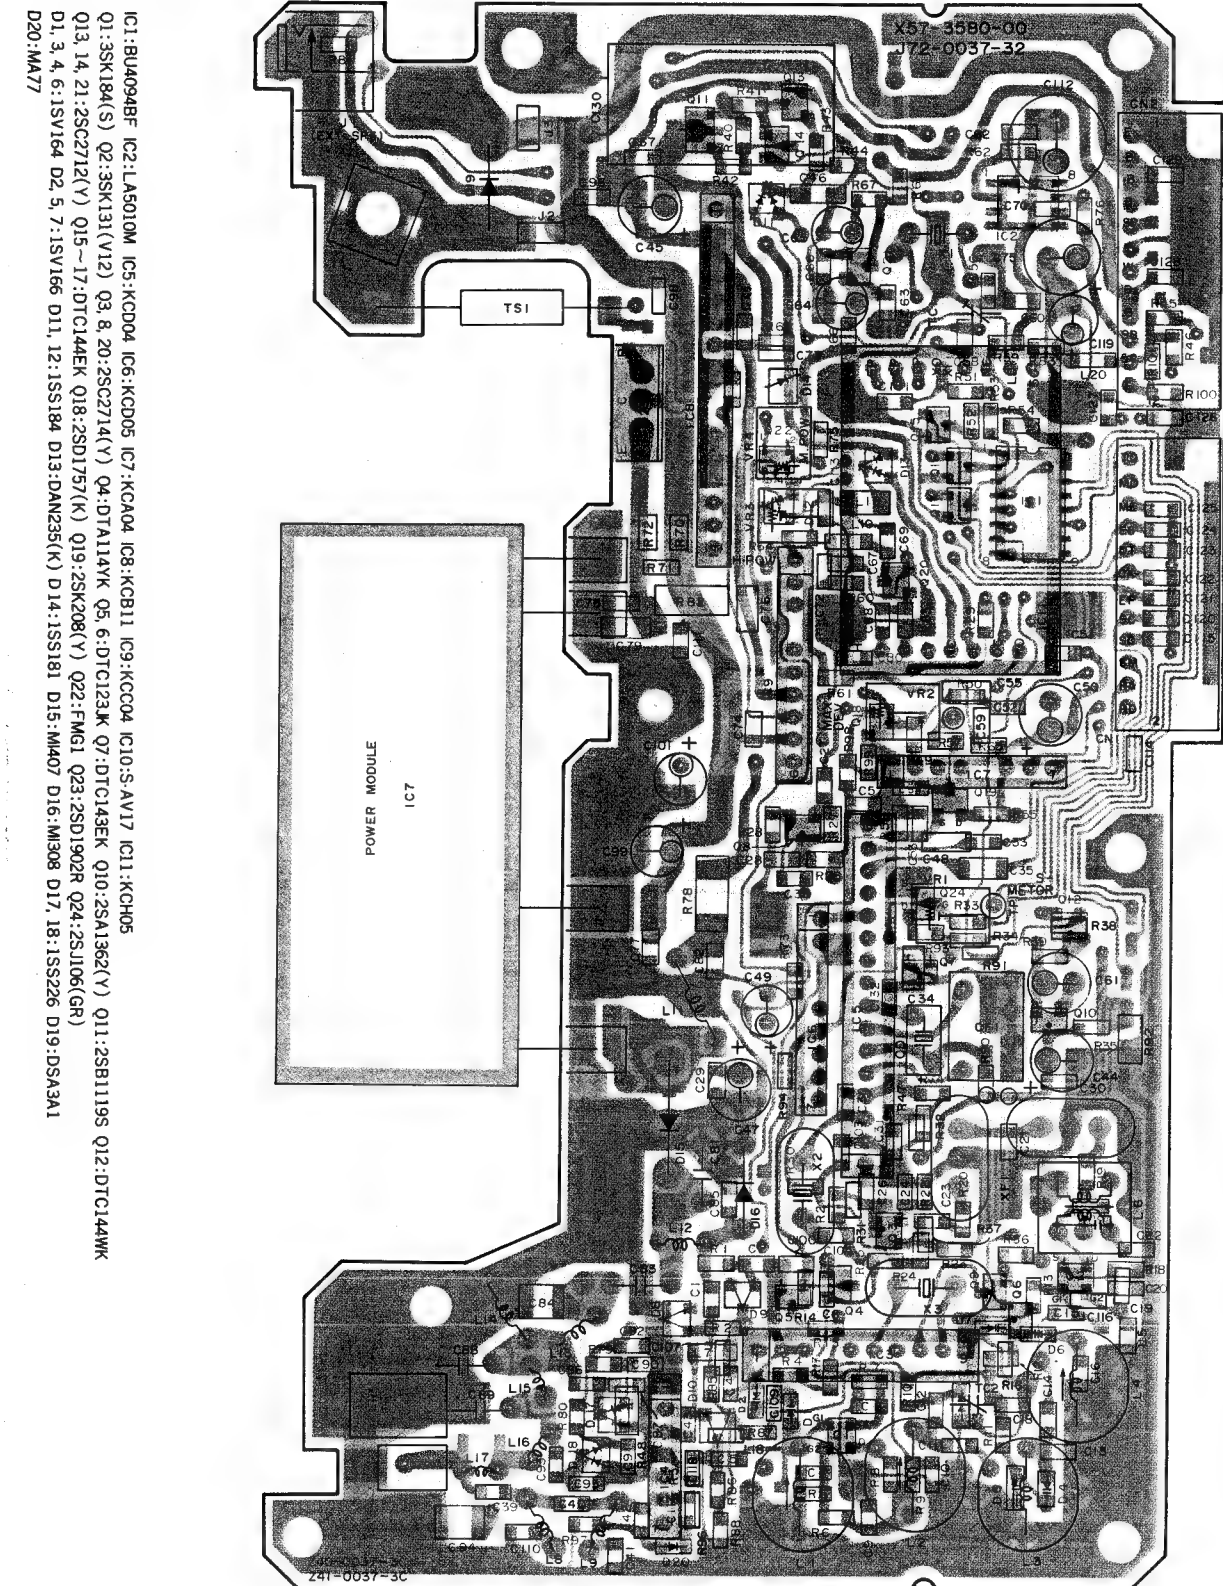




# SCHEMATIC DIAGRAM


144M TX-RX UNIT (X57-3580-XX)

— Signal line — Control line — Common DC line

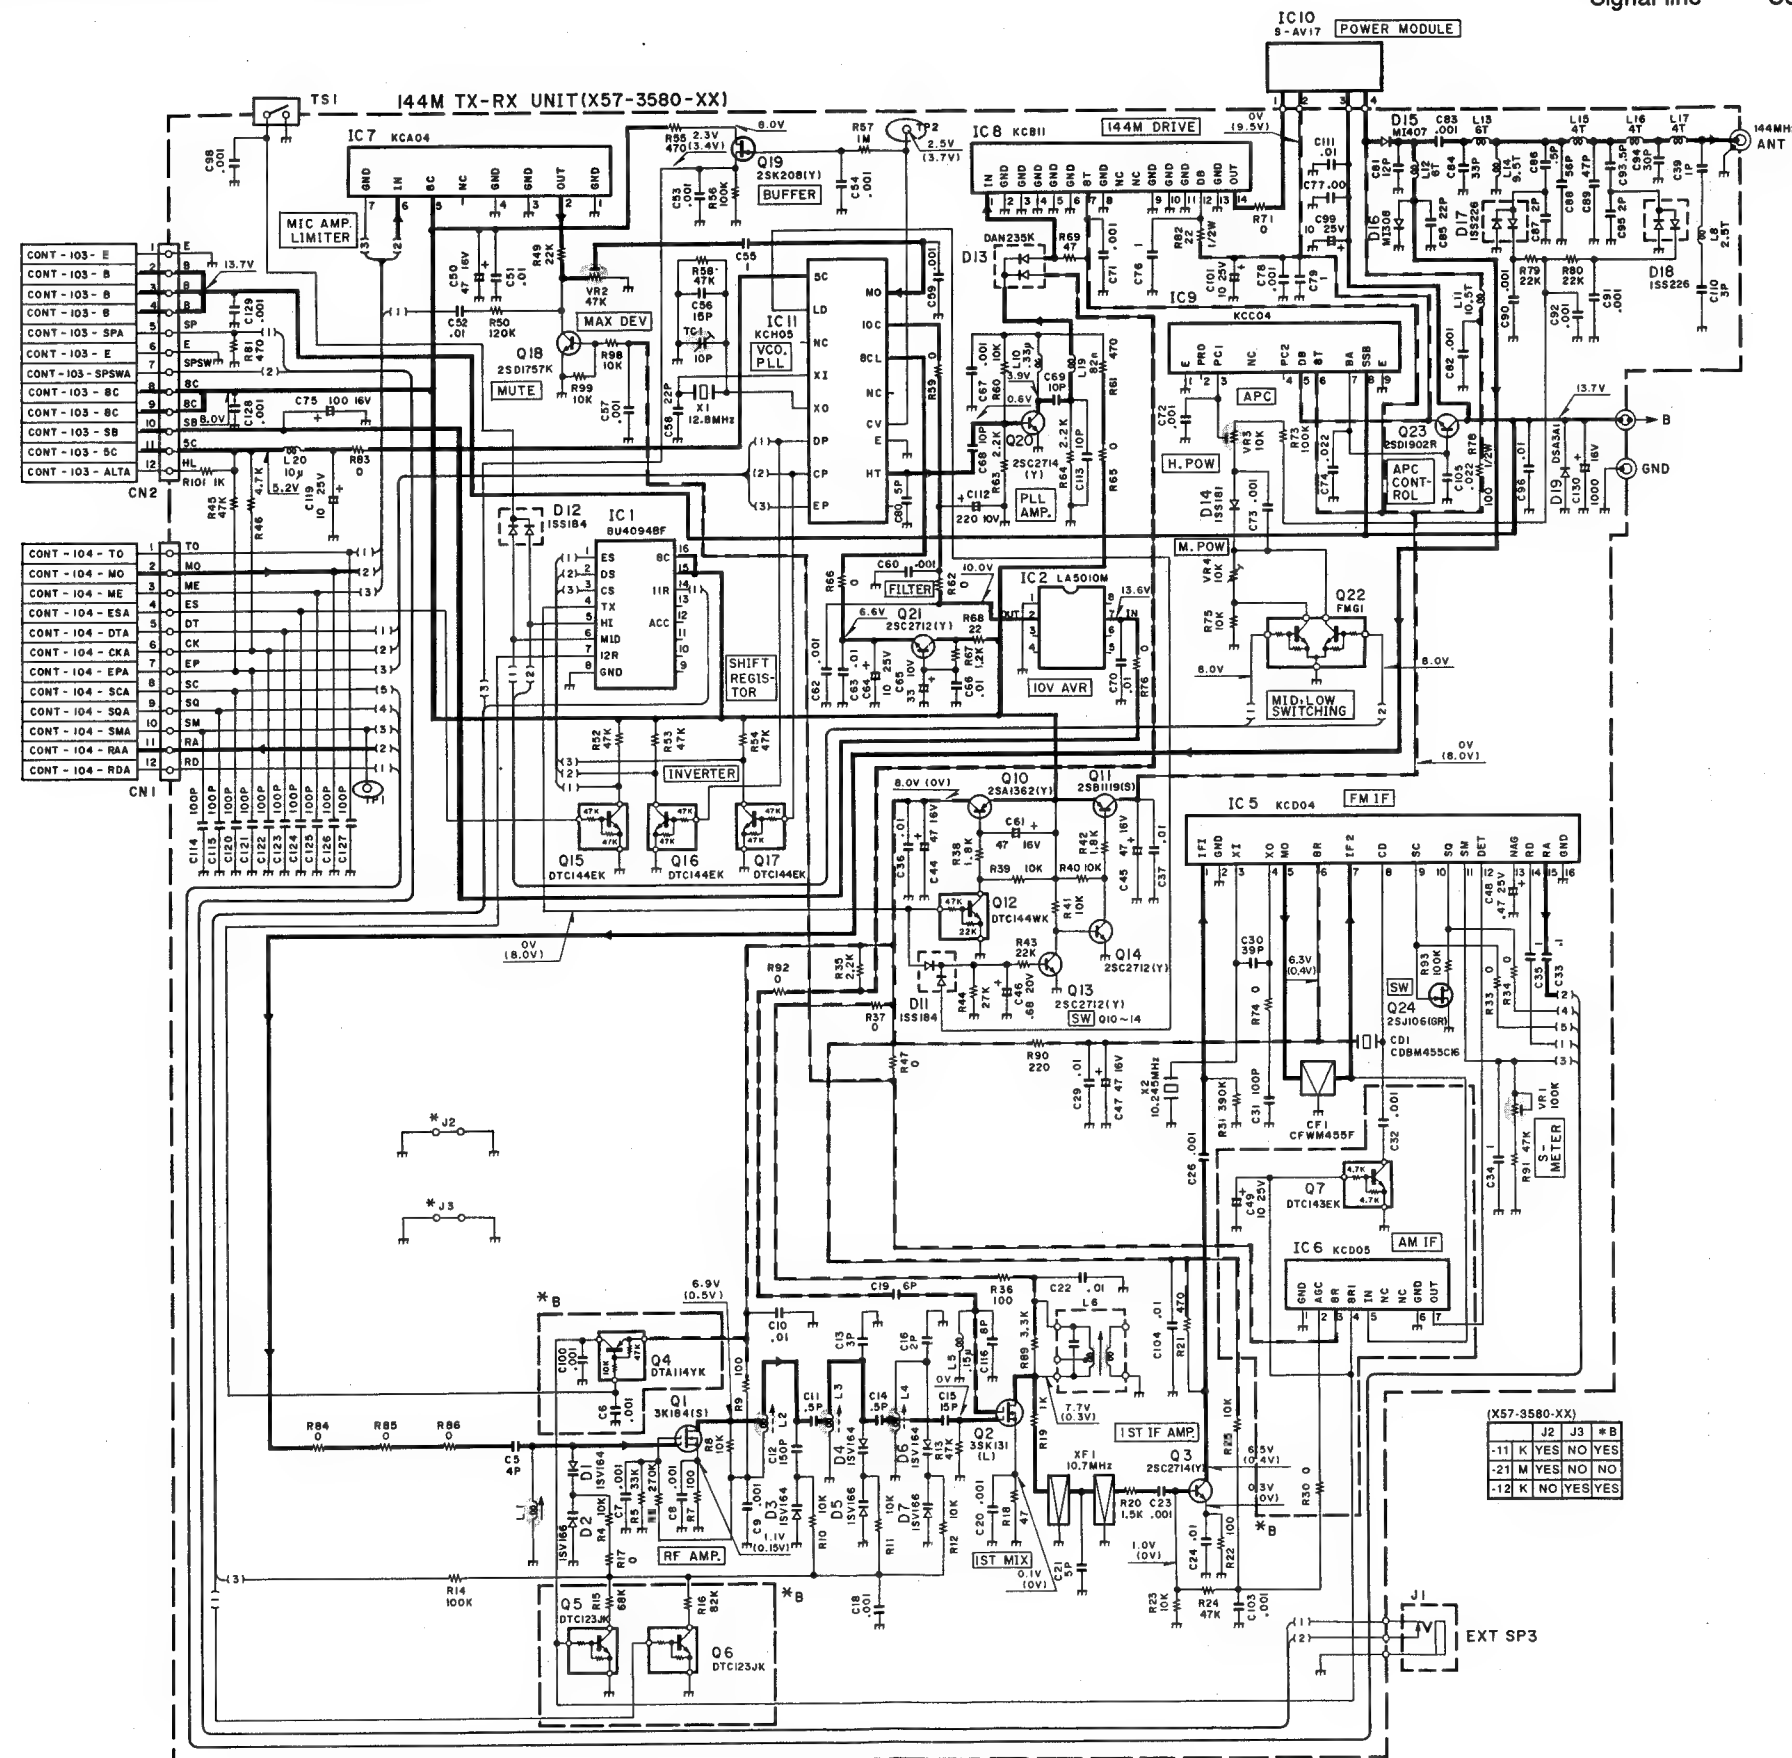

# TM-742 A/742 E/942 A

50M TX-RX UNIT (X57-3800-01)  
Component side view

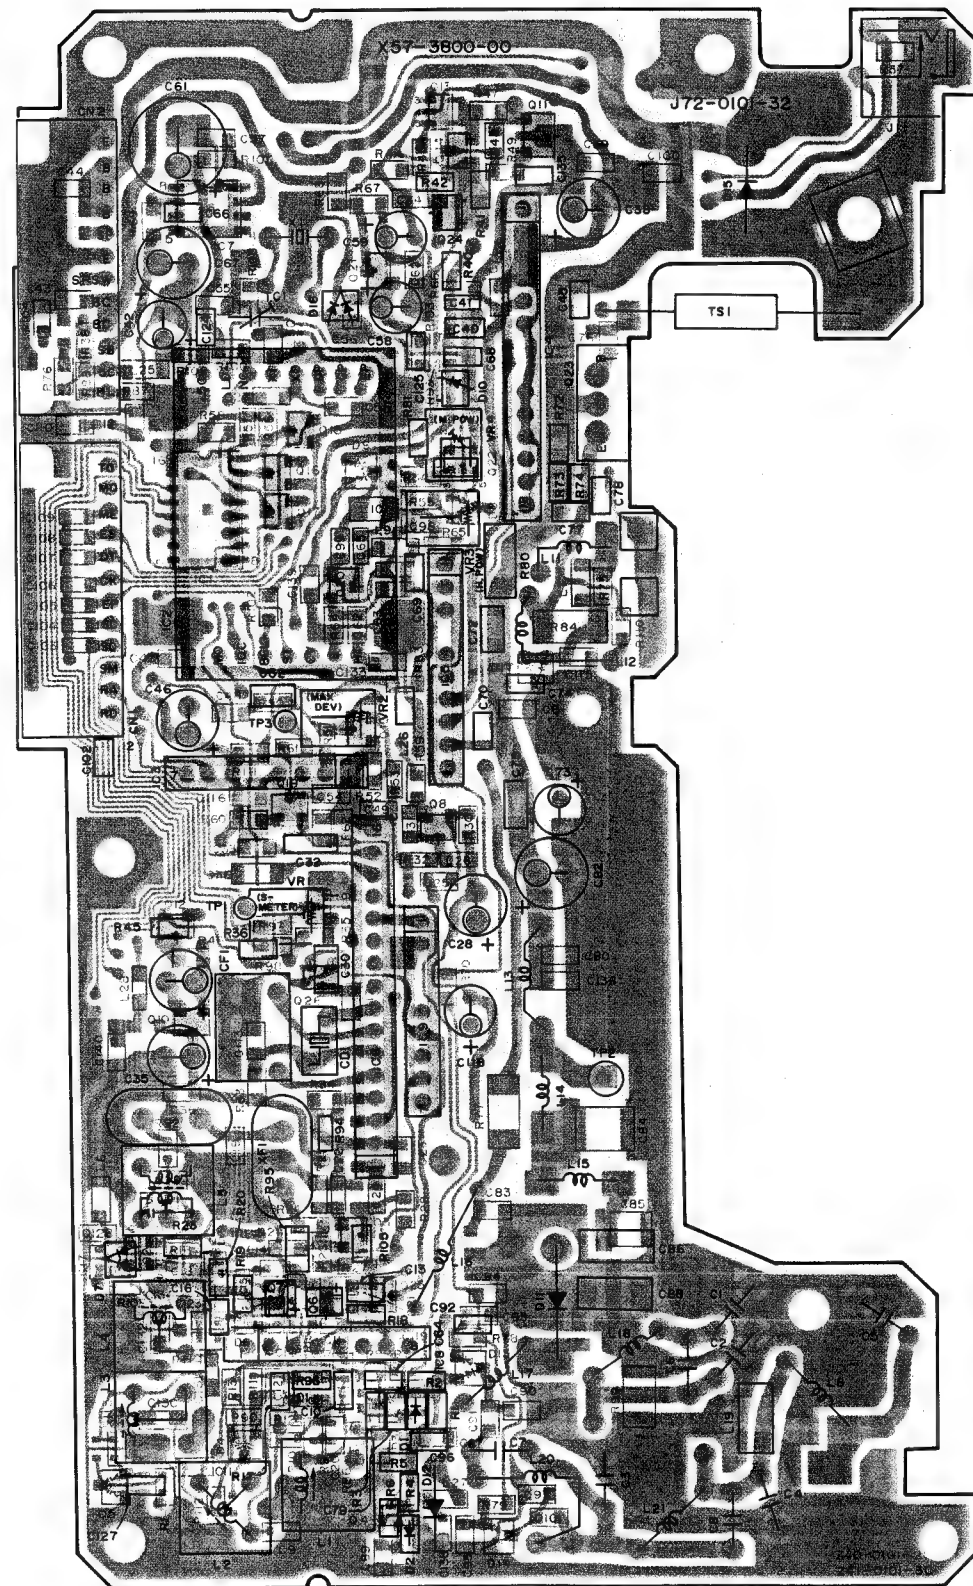


A pattern B pattern

IC1:BU4094BF/RU4094BF IC2:KCH10 IC3:KCA04:KCB18 IC5:KCC04 IC6:KCD04 IC7:LA5010M IC8:KCB19 IC9:KCD05  
Q1:3SK184(S) Q2:3SK131(V12) Q3,8,20:2SC2714(Y) Q4,15-17:DTIC144EK Q5:DTIC144EU Q6,7,25:DTA114K Q9:2SJ106(GR) Q10:2SA1362(Y) Q11:2SB1119S  
Q12:DTIC144WK Q13:FMW1 Q14,21,24:2SC2712(Y) Q18:2SD1757K Q19:2SK208(Y) Q22:FMG1 Q23:2SD1902R Q26:DTIC143EK  
D1,2:MA77 D3-6:1SV228 D7,9:DAN235(K) D8,16,17:1SS184 D10:1SS181 D11:M308/M407 D12:M308 D13,14:1SS226 D15:DSA3A1

## PC BOARD VIEW

50M TX-RX UNIT (X57-3800-01)  
Foil side view

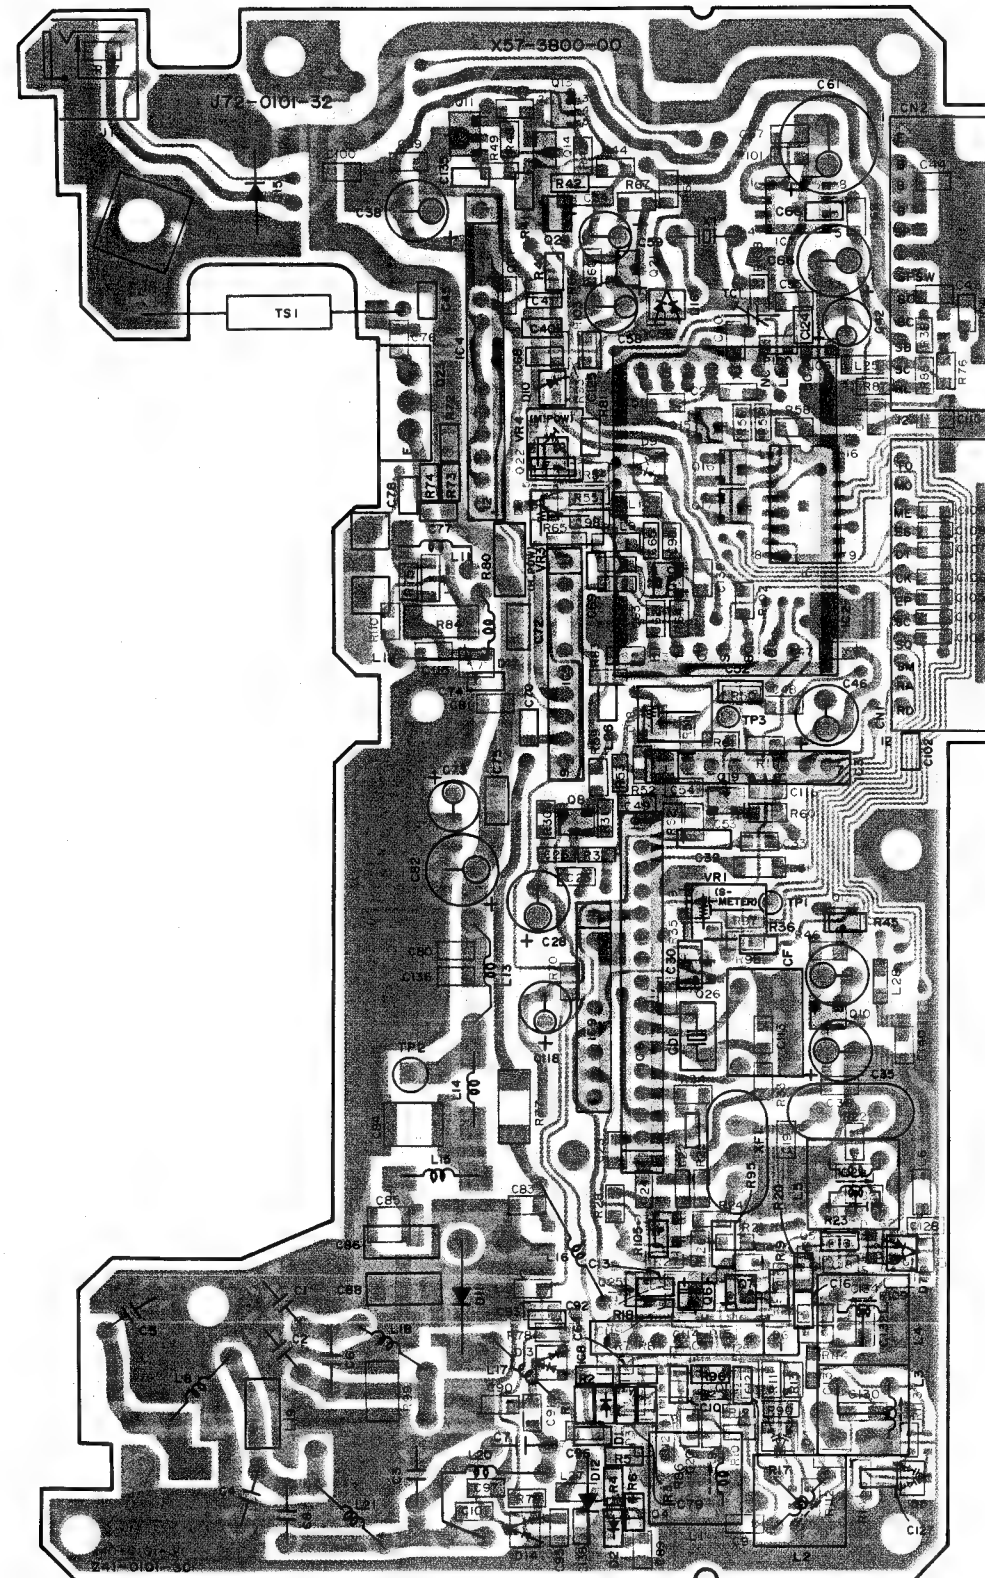

A pattern B pattern

IC1:BU4094BF/RU4094BF IC2:KCH10 IC3:KCA04:KCB18 IC5:KCC04 IC6:KCD04 IC7:LA5010M IC8:KCB19 IC9:KCD05  
Q1:3SK184(S) Q2:3SK131(V12) Q3,8,20:2SC2714(Y) Q4,15-17:DTIC144EK Q5:DTIC144EU Q6,7,25:DTA114K Q9:2SJ106(GR) Q10:2SA1362(Y) Q11:2SB1119S  
Q12:DTIC144WK Q13:FMW1 Q14,21,24:2SC2712(Y) Q18:2SD1757K Q19:2SK208(Y) Q22:FMG1 Q23:2SD1902R Q26:DTIC143EK  
D1,2:MA77 D3-6:1SV228 D7,9:DAN235(K) D8,16,17:1SS184 D10:1SS181 D11:M308/M407 D12:M308 D13,14:1SS226 D15:DSA3A1

DTA114EK  
DTC144EK  
DTC144EU  
DTC144WK  
2SA1362  
2SC2712  
2SC2714  
2SD1757  
2SD1757K

FMG1  
FMW1

LA5010M


2SK208

3SK131  
3SK184

# SCHEMATIC DIAGRAM

50M TX-RX UNIT (X57-3800-XX)

Signal line ..... Control line — Common DC line

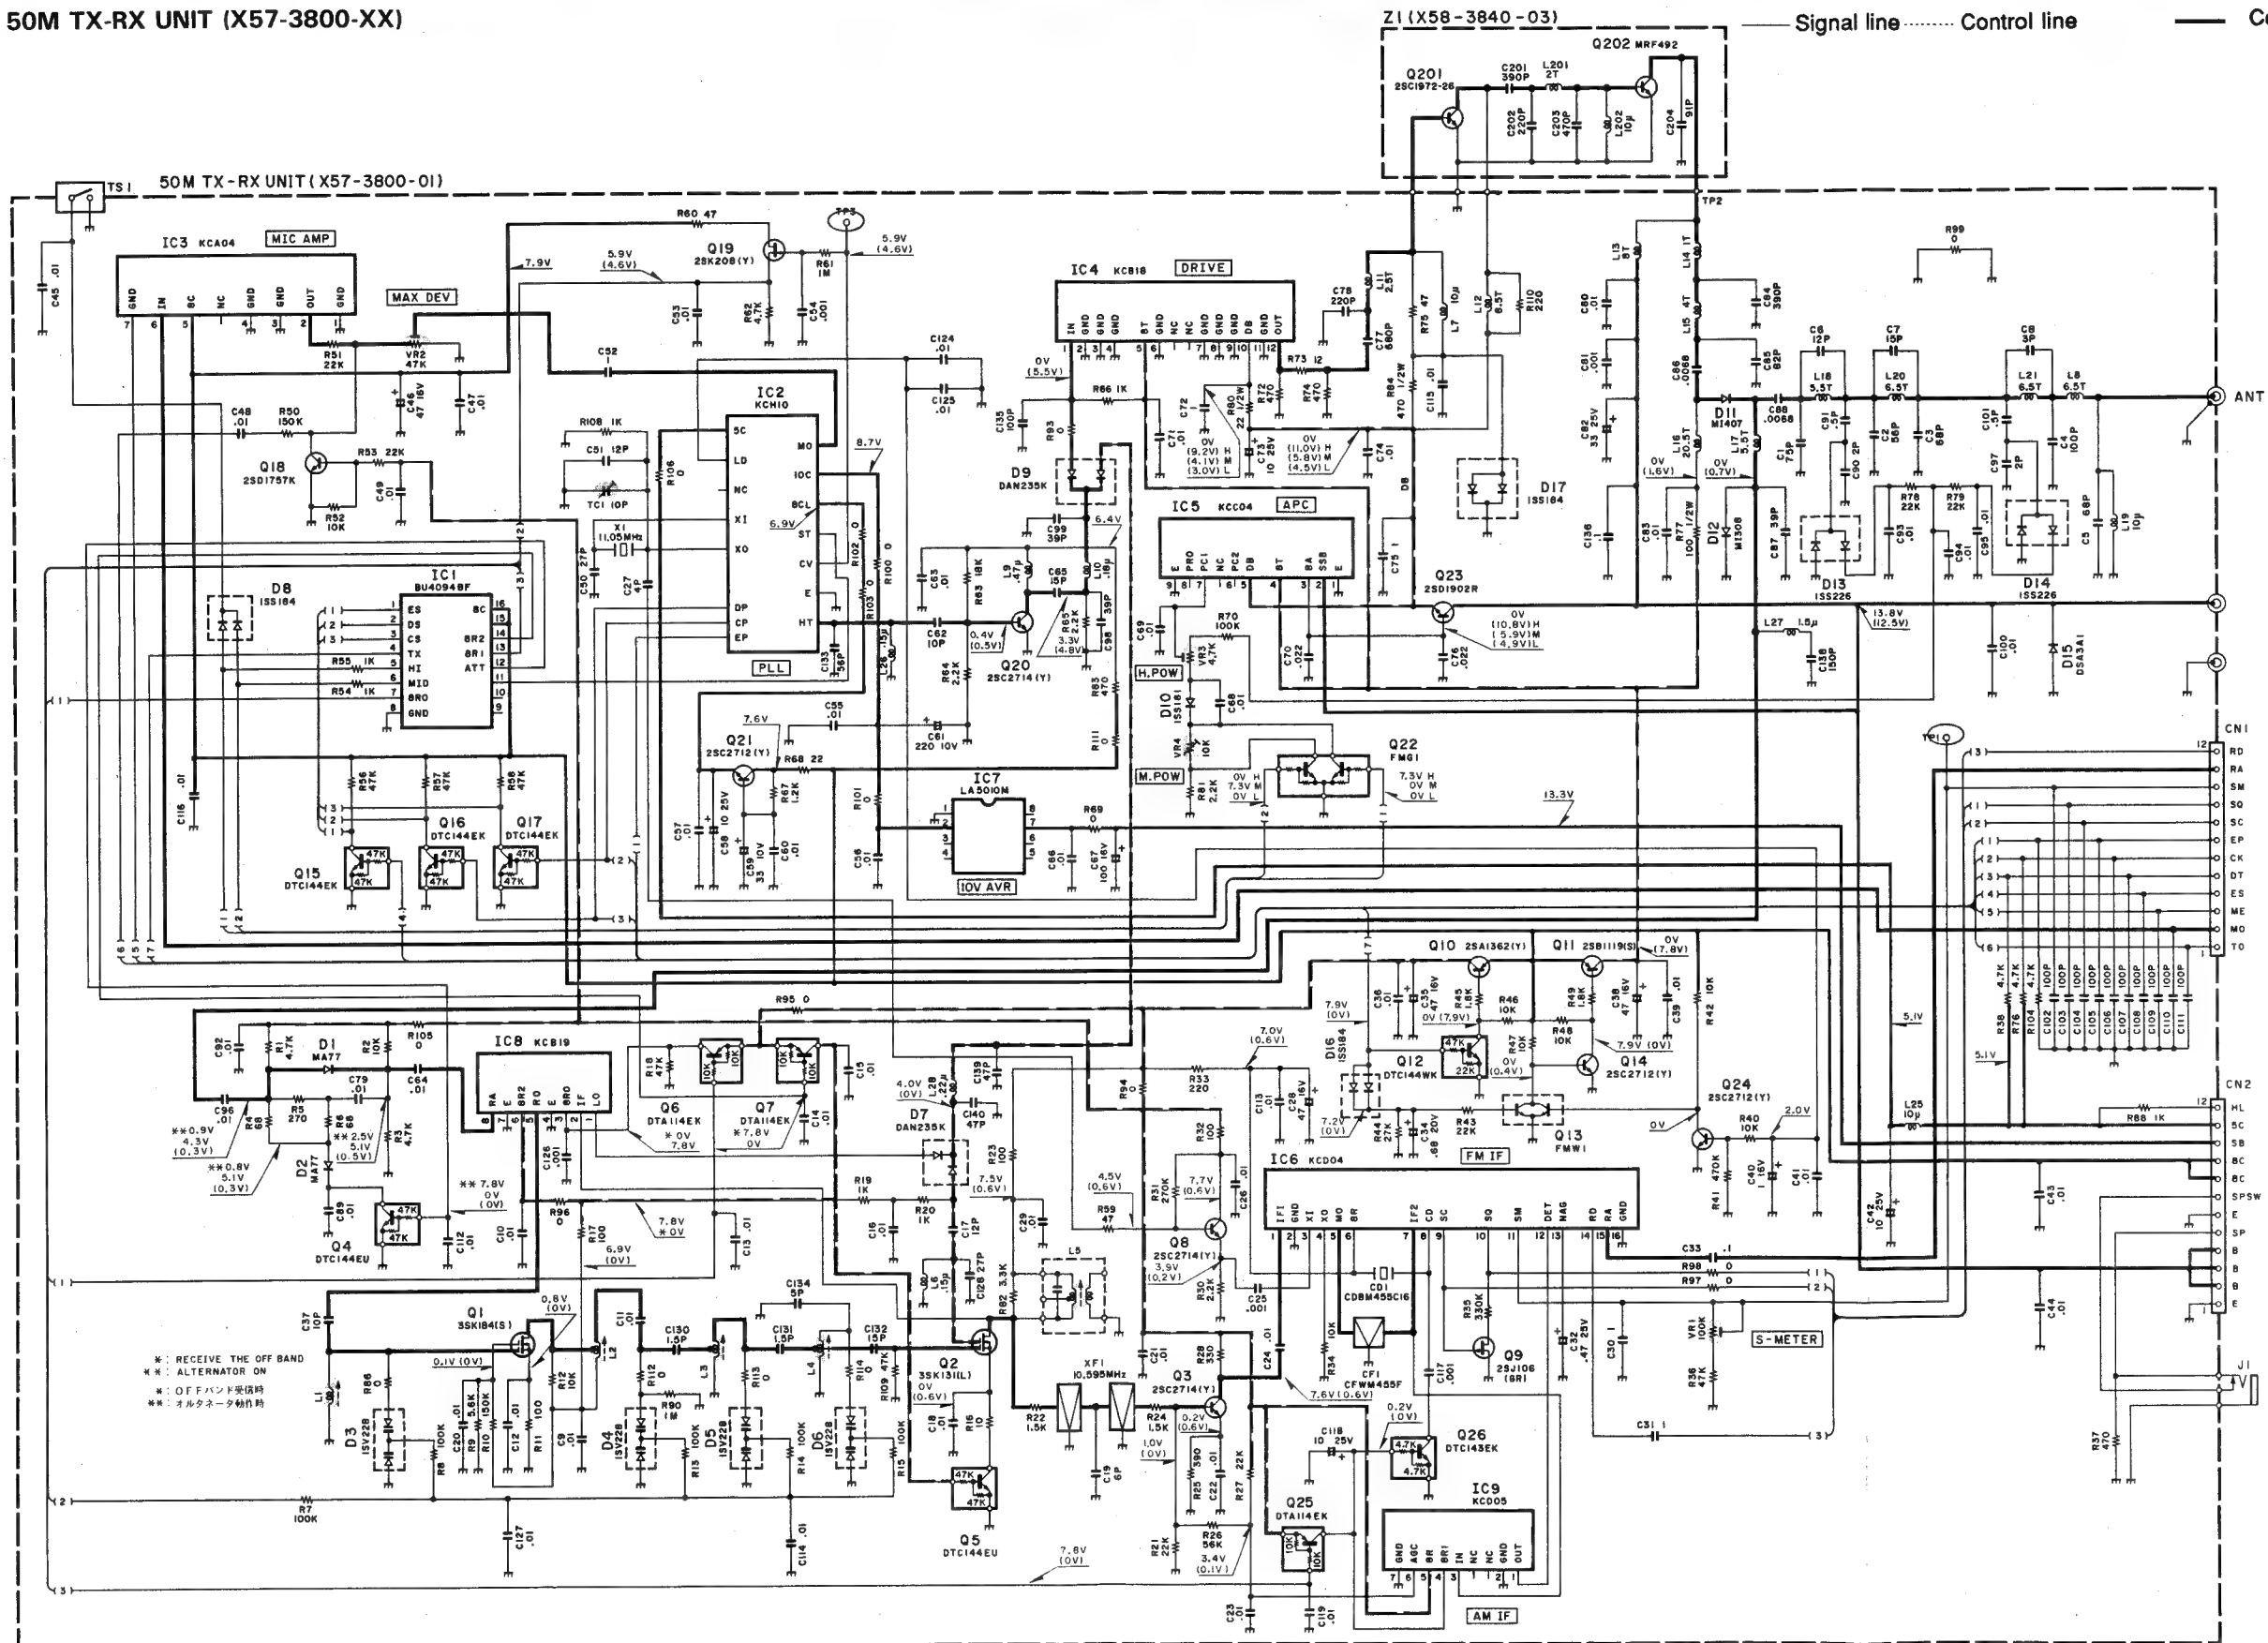




# TM-742 A/742 E/942 A

28M TX-RX UNIT (X57-3790-01)

Component side view

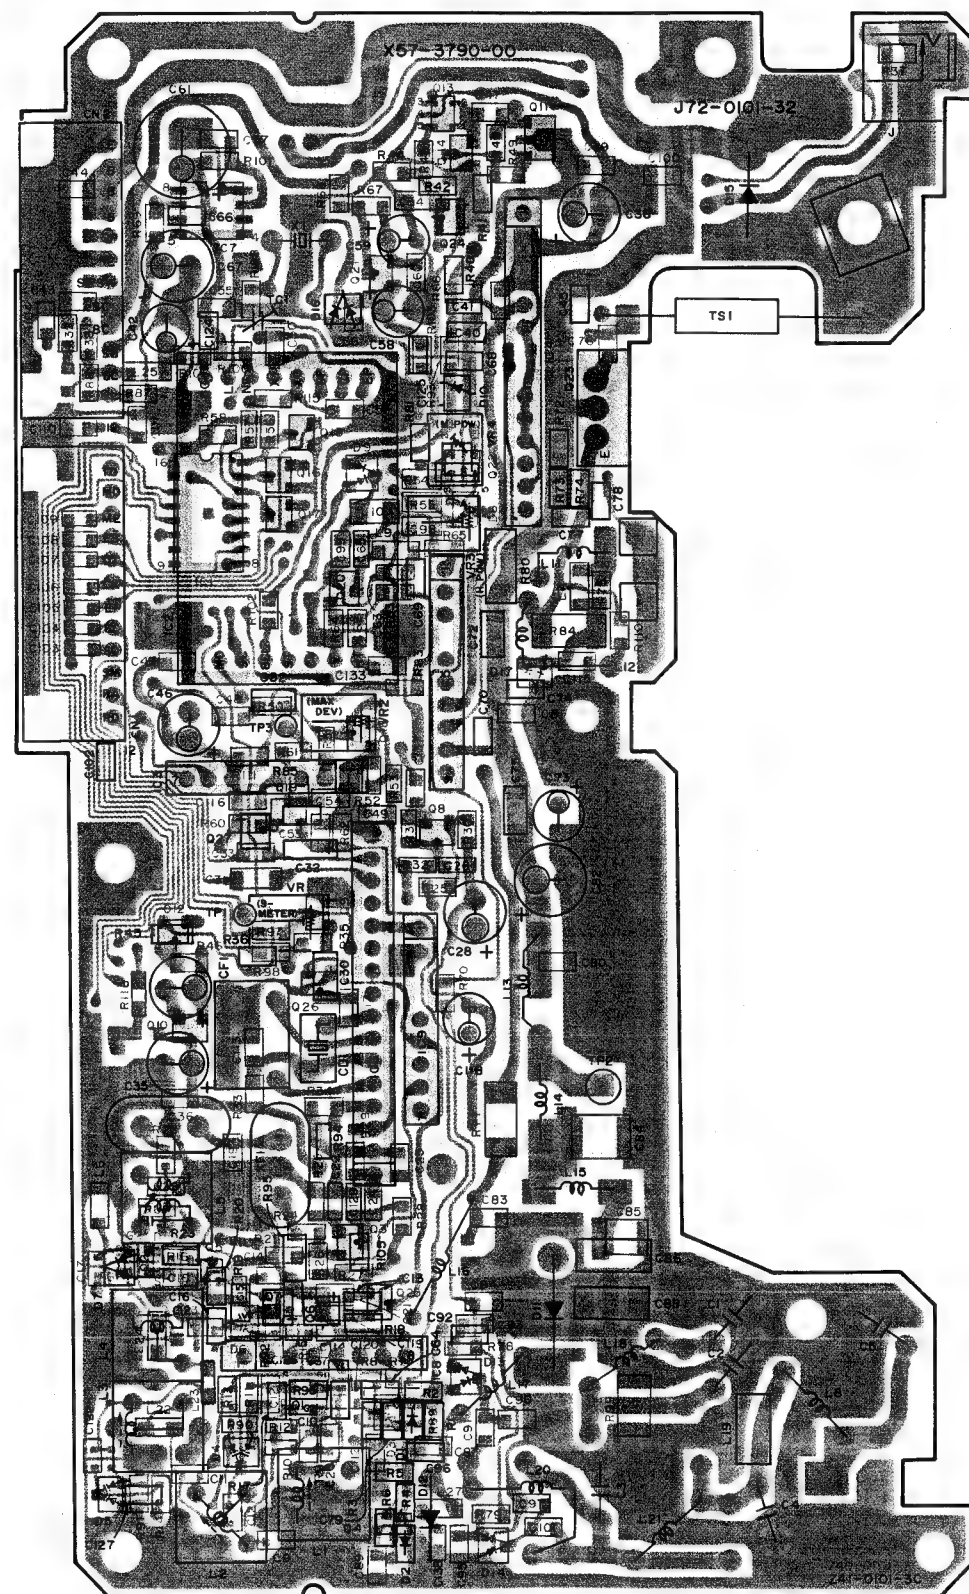

## PC BOARD VIEW

DTA114EK  
DTC143EK  
DTC144EK  
DTC144EU  
DTC144WK  
2SA1362  
2SC2712  
2SC2714  
2SD1757

FMG1  
FMW1

LA5009M


2SK208

3SK179

IC1:BU4094BF/RU4094BF IC2:KCH09 IC3:KCA04 IC4:KCB16 IC5:KCC04 IC6:KCD04 IC7:LA5009M IC8:KCB17 IC9:KCD05  
Q1:3SK179(L) Q2:3SK131(V12) Q3:2SC2714(Y) Q4:DTC144EK Q5:DTC144EU Q6:7:DTA114EK Q8:2SC2714(Y) Q9:2SA1362(Y) Q10:2SB1119S  
Q12:DTC114WK Q13:FMW1 Q14:2SC2712(Y) Q15-17:DTC144EK Q18:2SD1757(K) Q19:2SK208(Y) Q20:2SC2714(Y) Q21:2SC2712(Y) Q22:FMG1 Q23:2SD1902R  
Q24:2SC2712(Y) Q25:DTA114EK Q26:DTC143EK Q27:DTC144EK  
D1:2:MA77 D3-6:1SV228 D7:9:DAN235(K) D8:1SS184 D10:1SS181 D11:M308/UM9401 D12:M308 D13:14:1SS226 D15:DSA3A1 D16:17:1SS184

28M TX-RX UNIT (X57-3790-01)

Foil side view

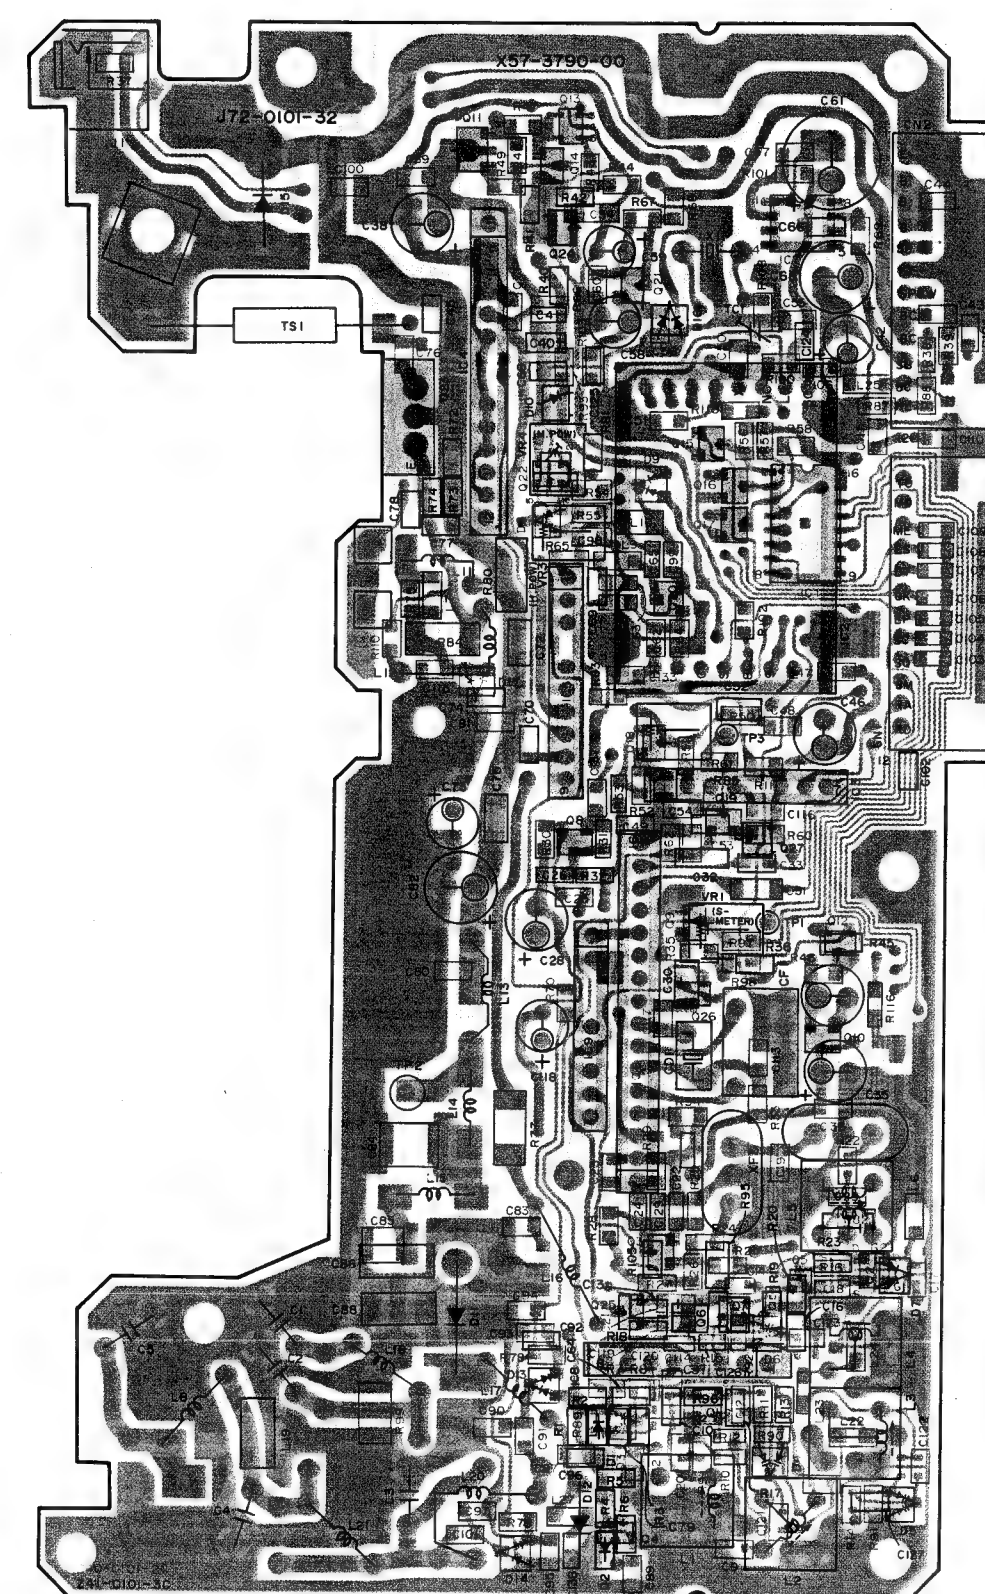


A pattern B pattern


A pattern B pattern

# SCHEMATIC DIAGRAM

28M TX-RX UNIT (X57-3790-XX)

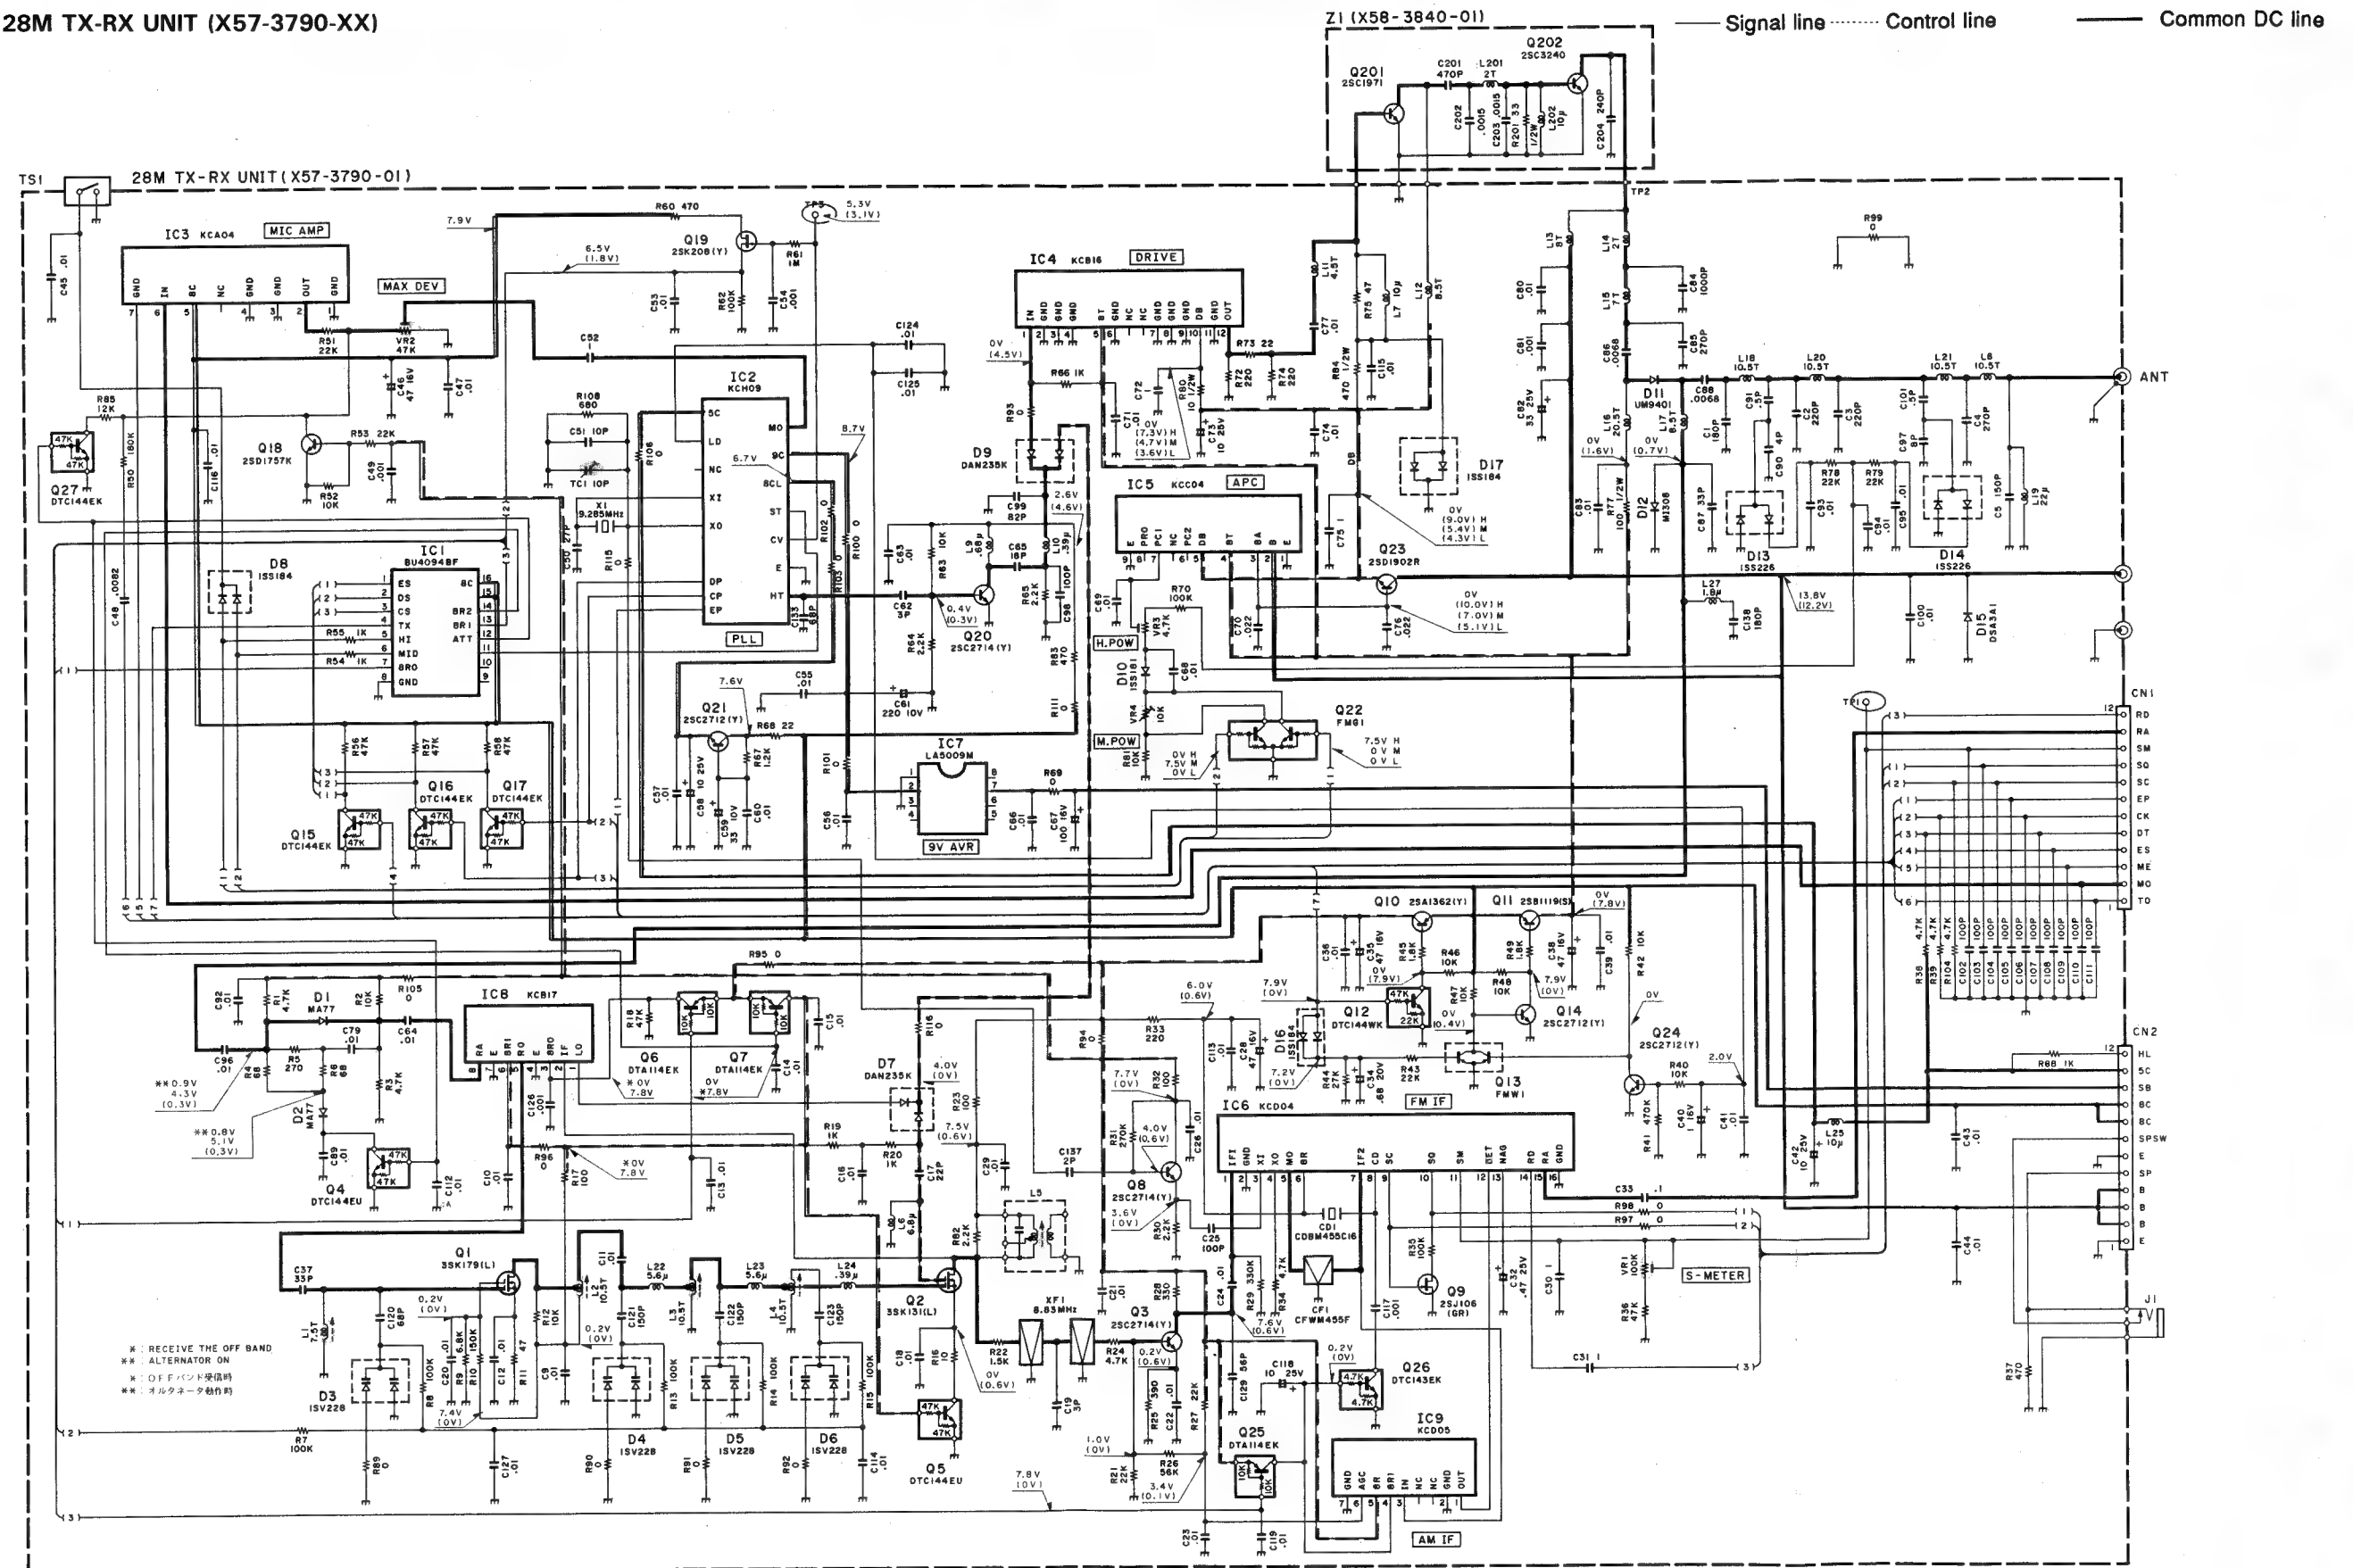


## BLOCK DIAGRAM

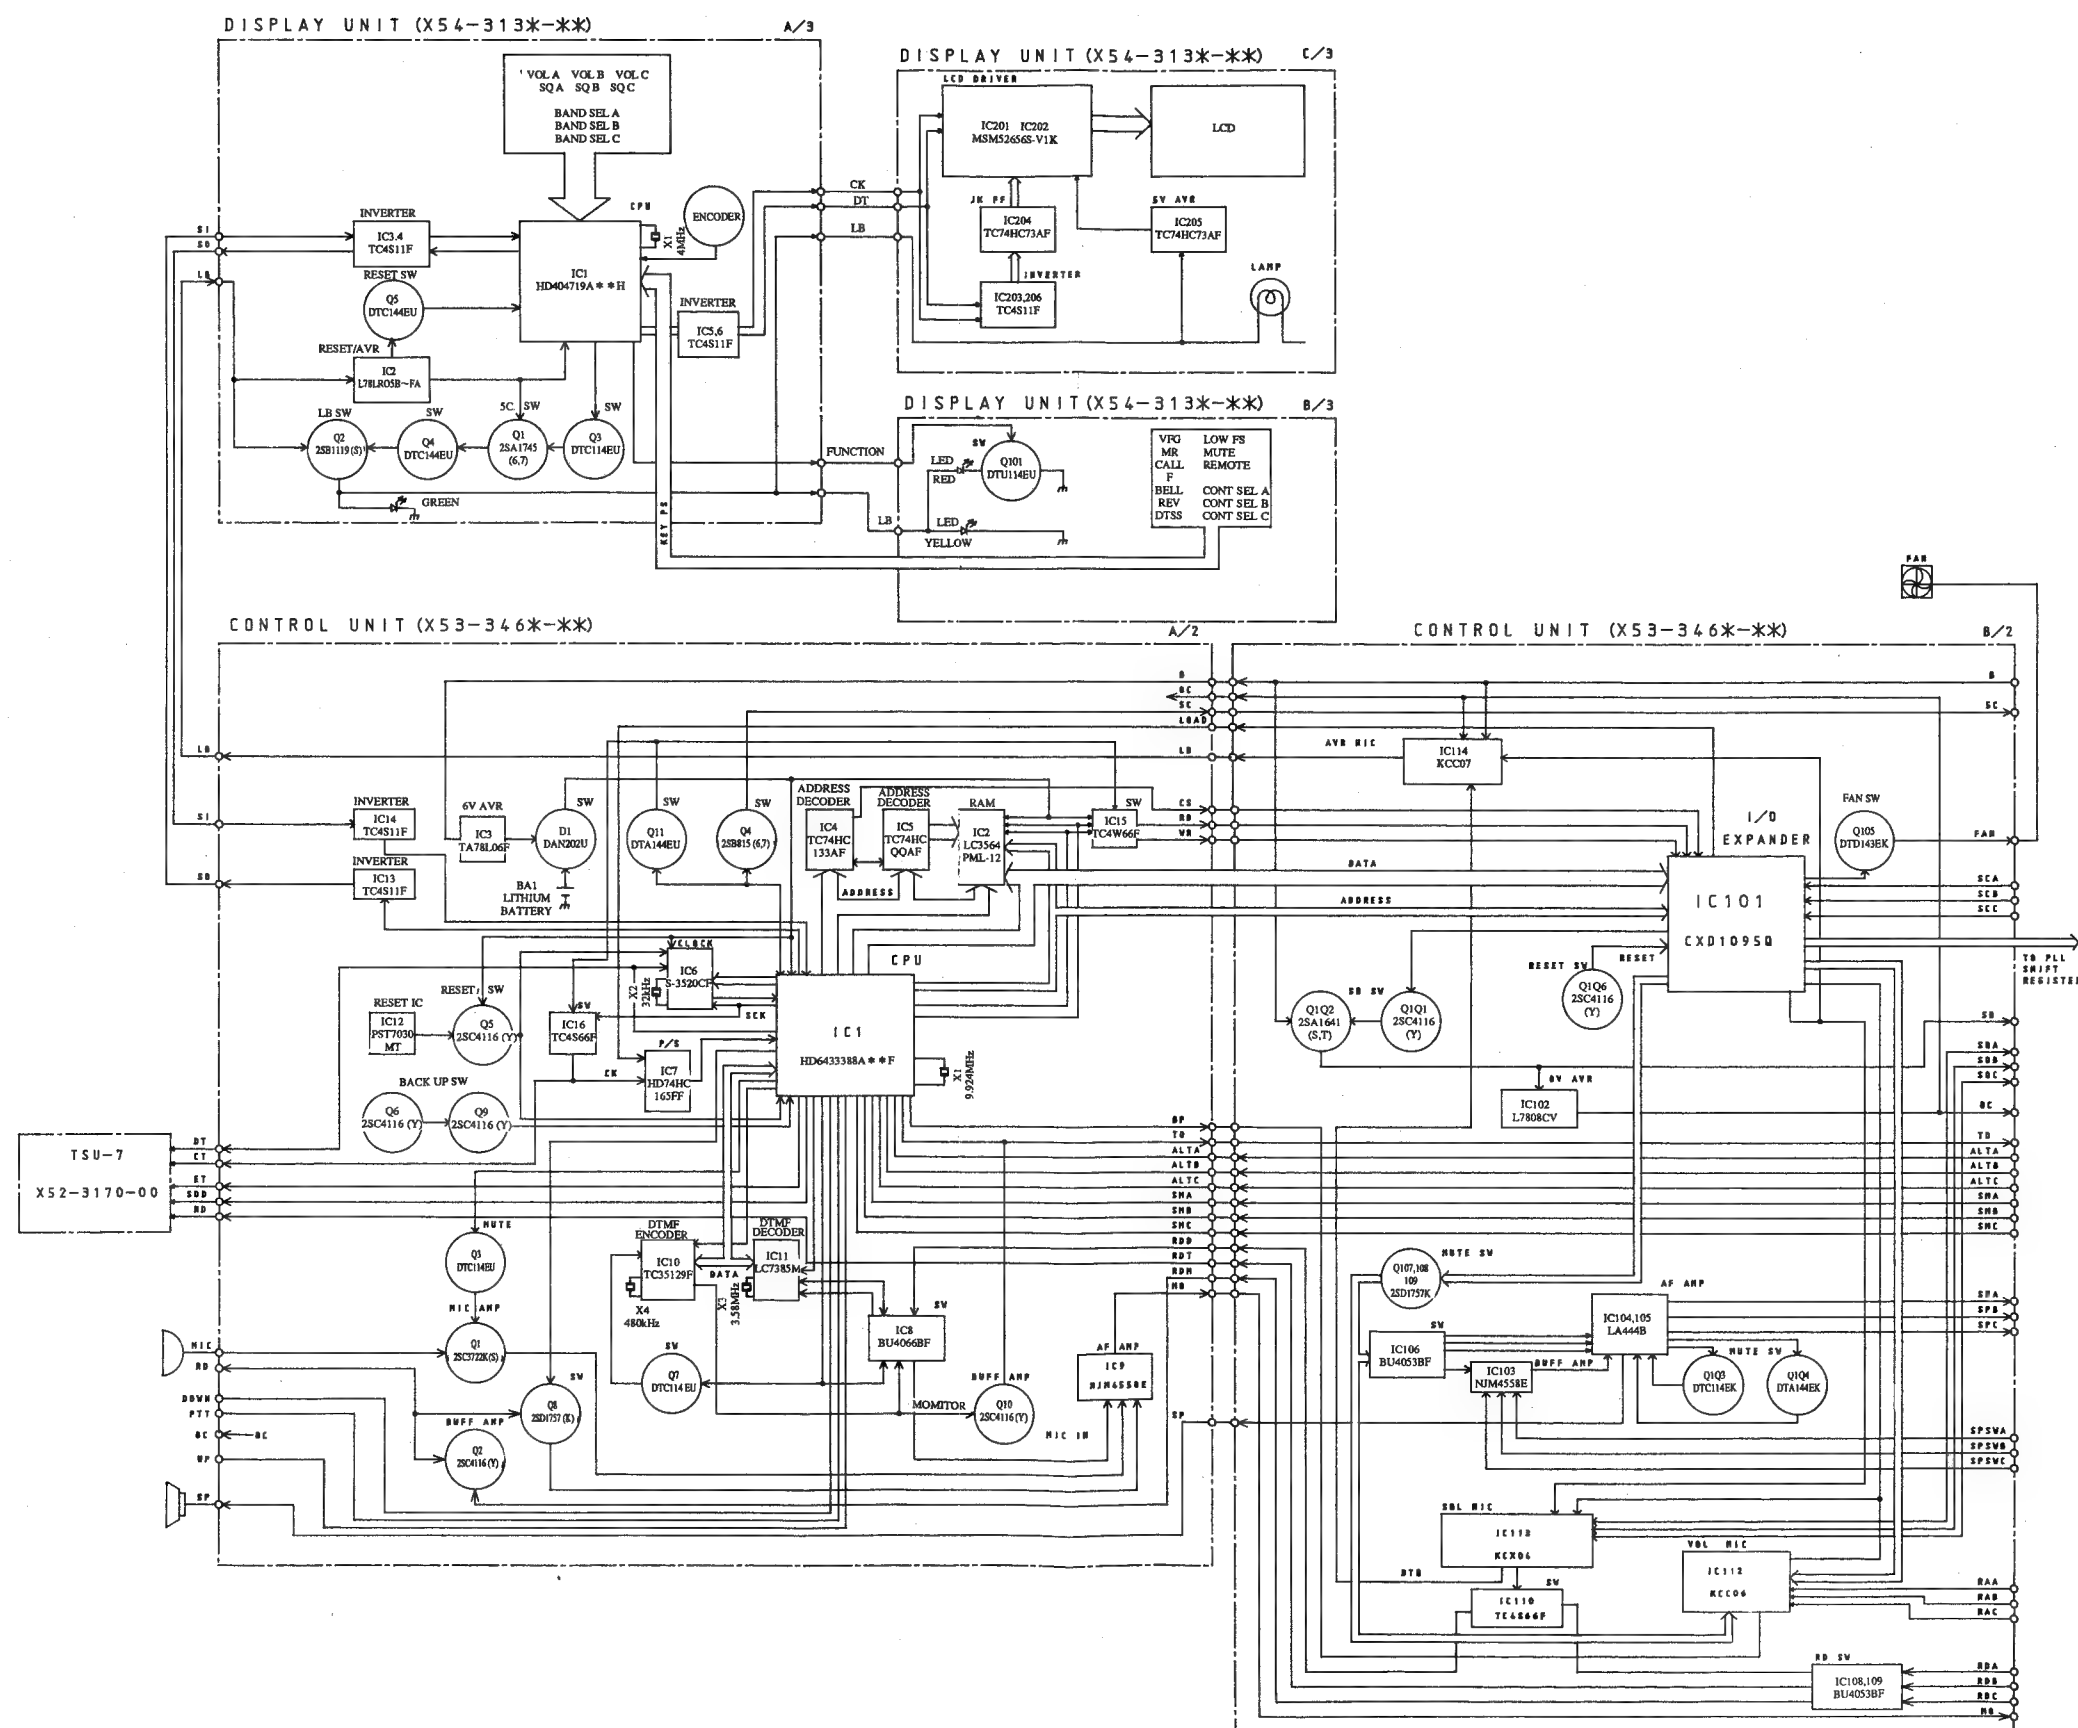

## BLOCK DIAGRAM

28TXRX UNIT (X57-3790-01)

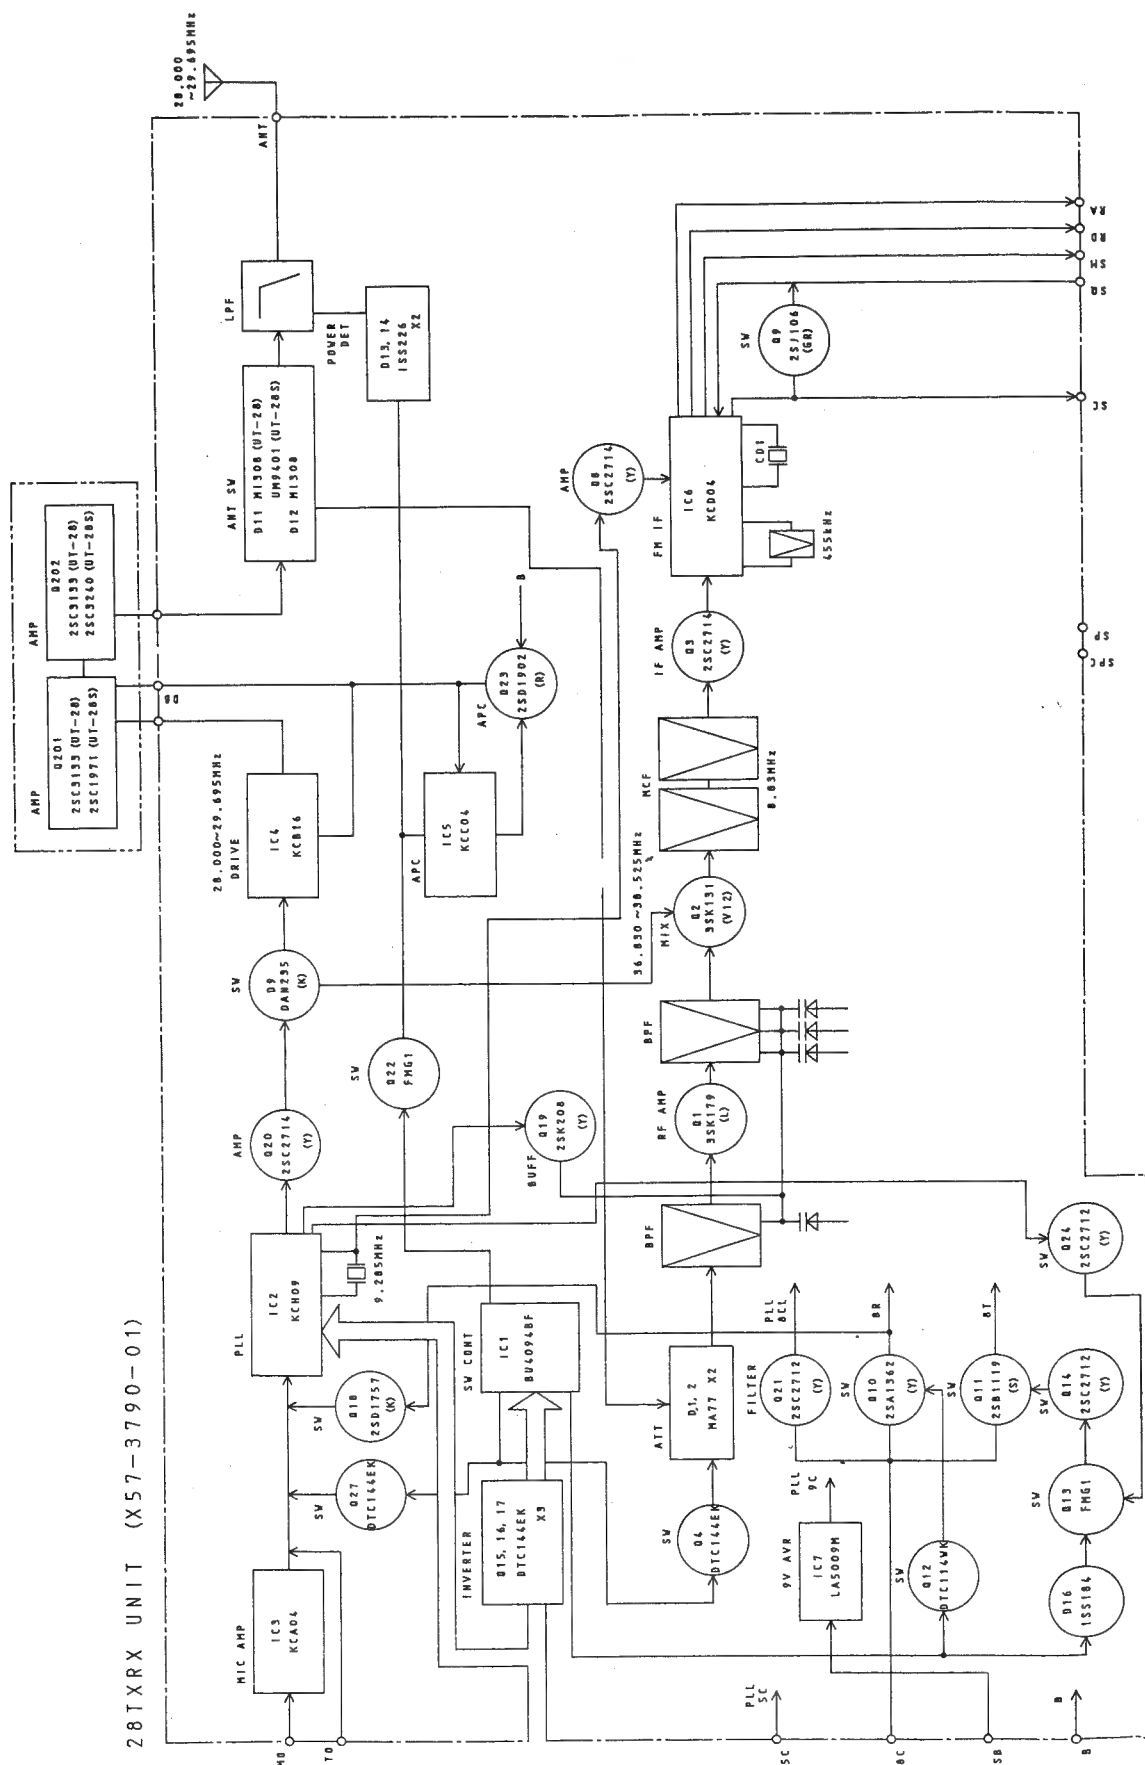


## BLOCK DIAGRAM


50TXRX UNIT (X57-3800-01)




# BLOCK DIAGRAM

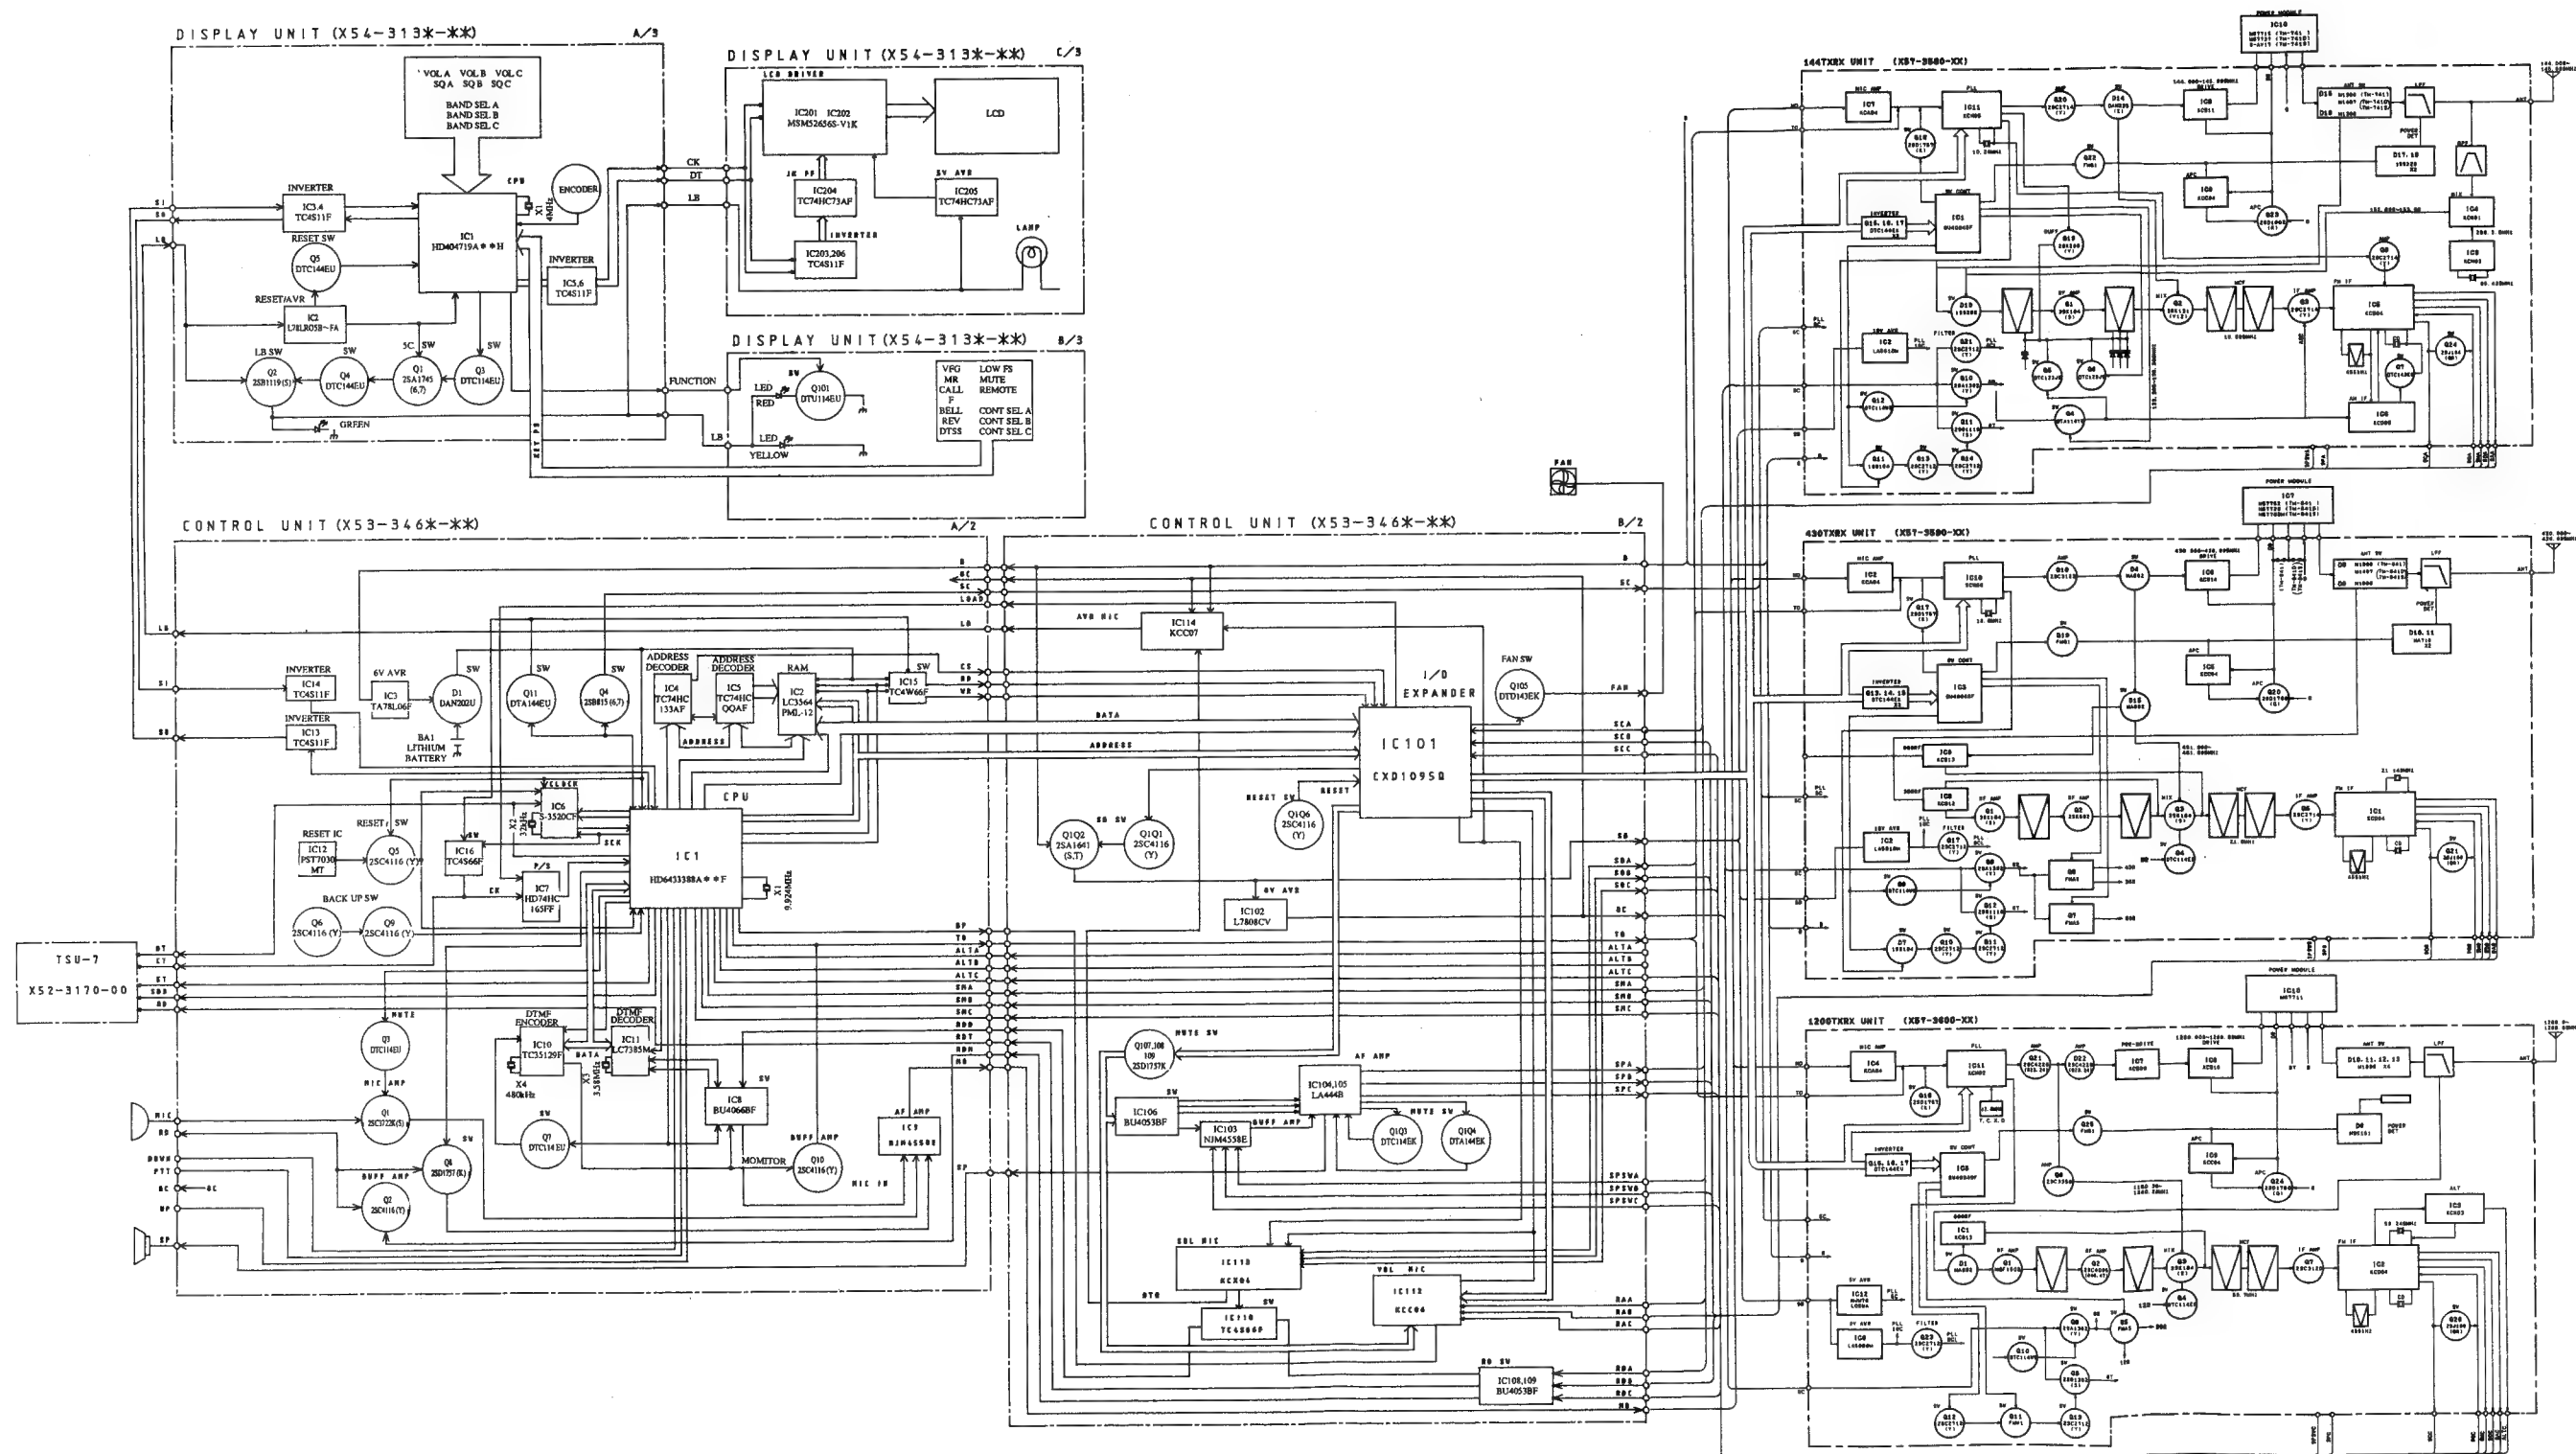

LEVEL DIAGRAM

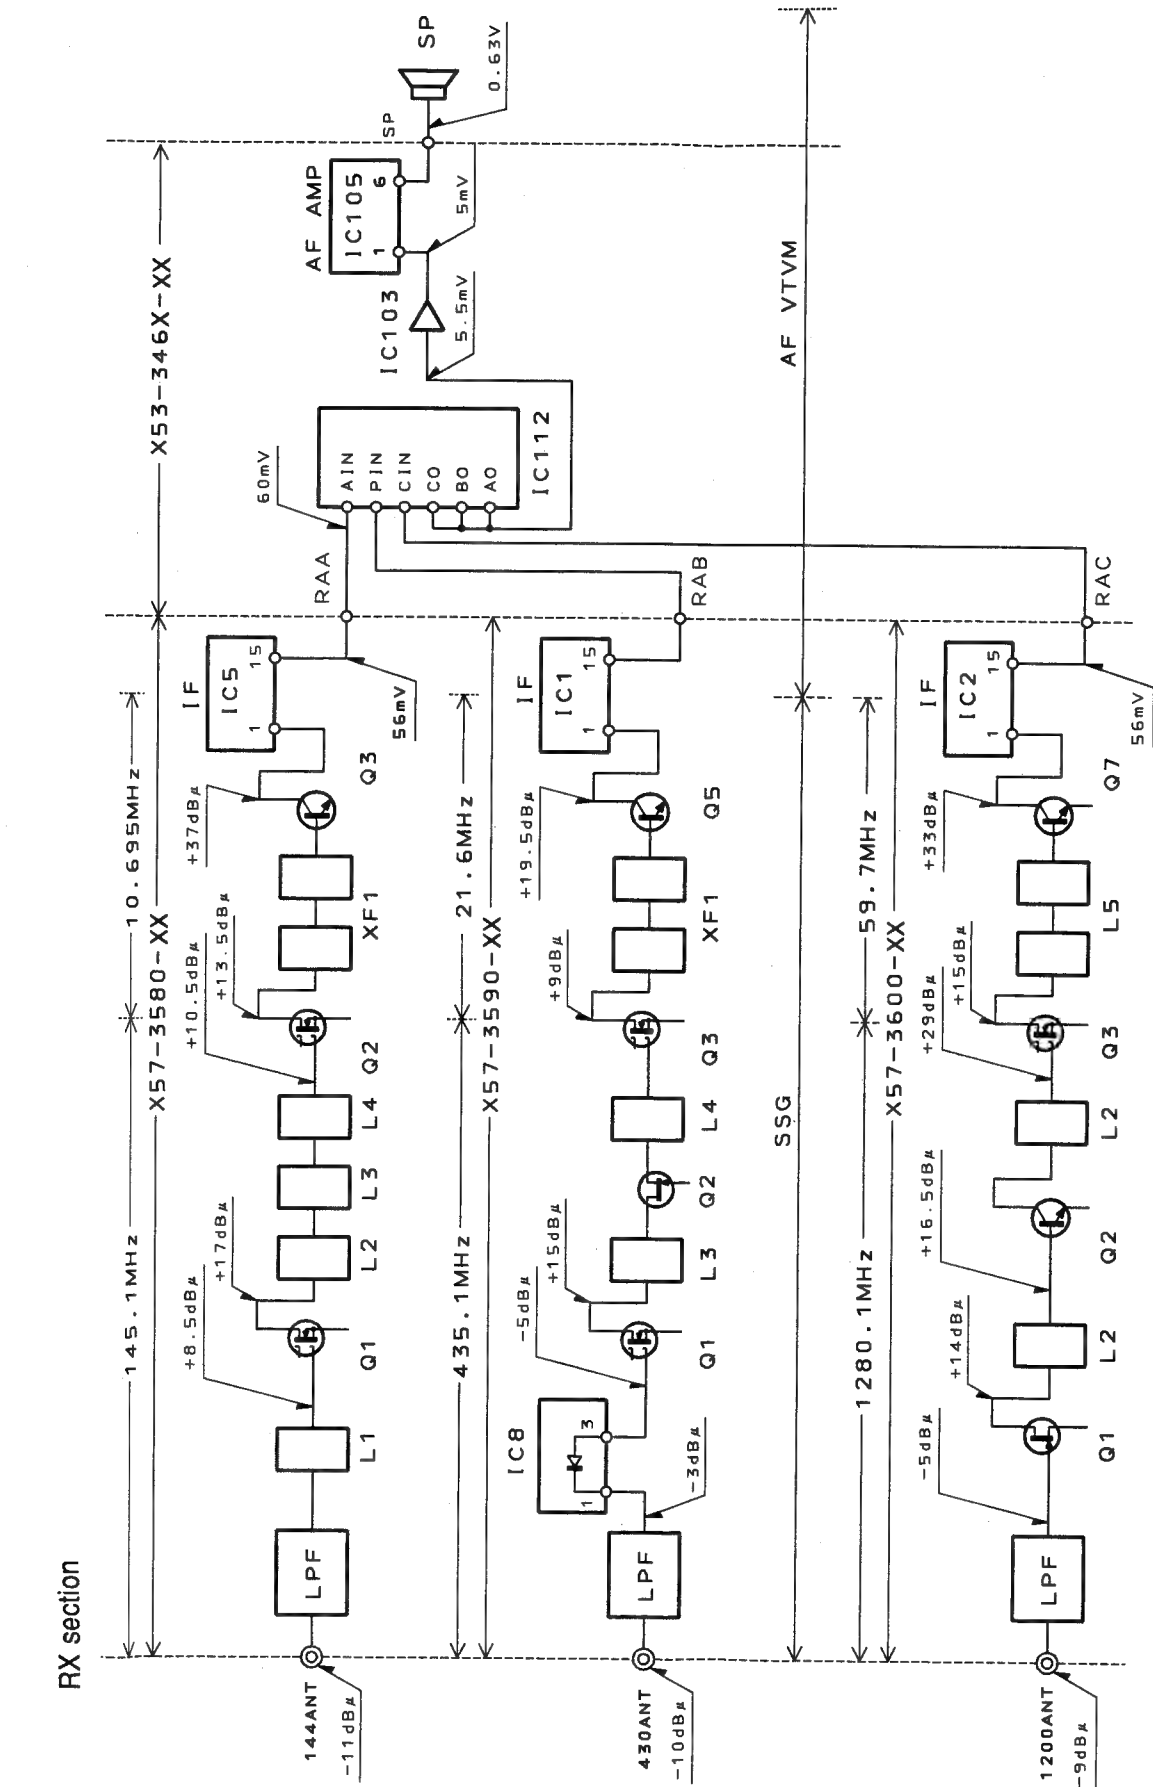

1. SG input level for which a 12dB SINAD are obtained. Measured by connecting the SG to each point via a 0.01μF capacitor.  
2. AF level obtained when the AF output level is adjusted for 0.63V/8Ω with the front panel AF VOL control. Measure with AF voltmeter connected to the speaker jack, receiving a 40dB EMF SSG signal modulated at 1KHz, DEV 3KHz.

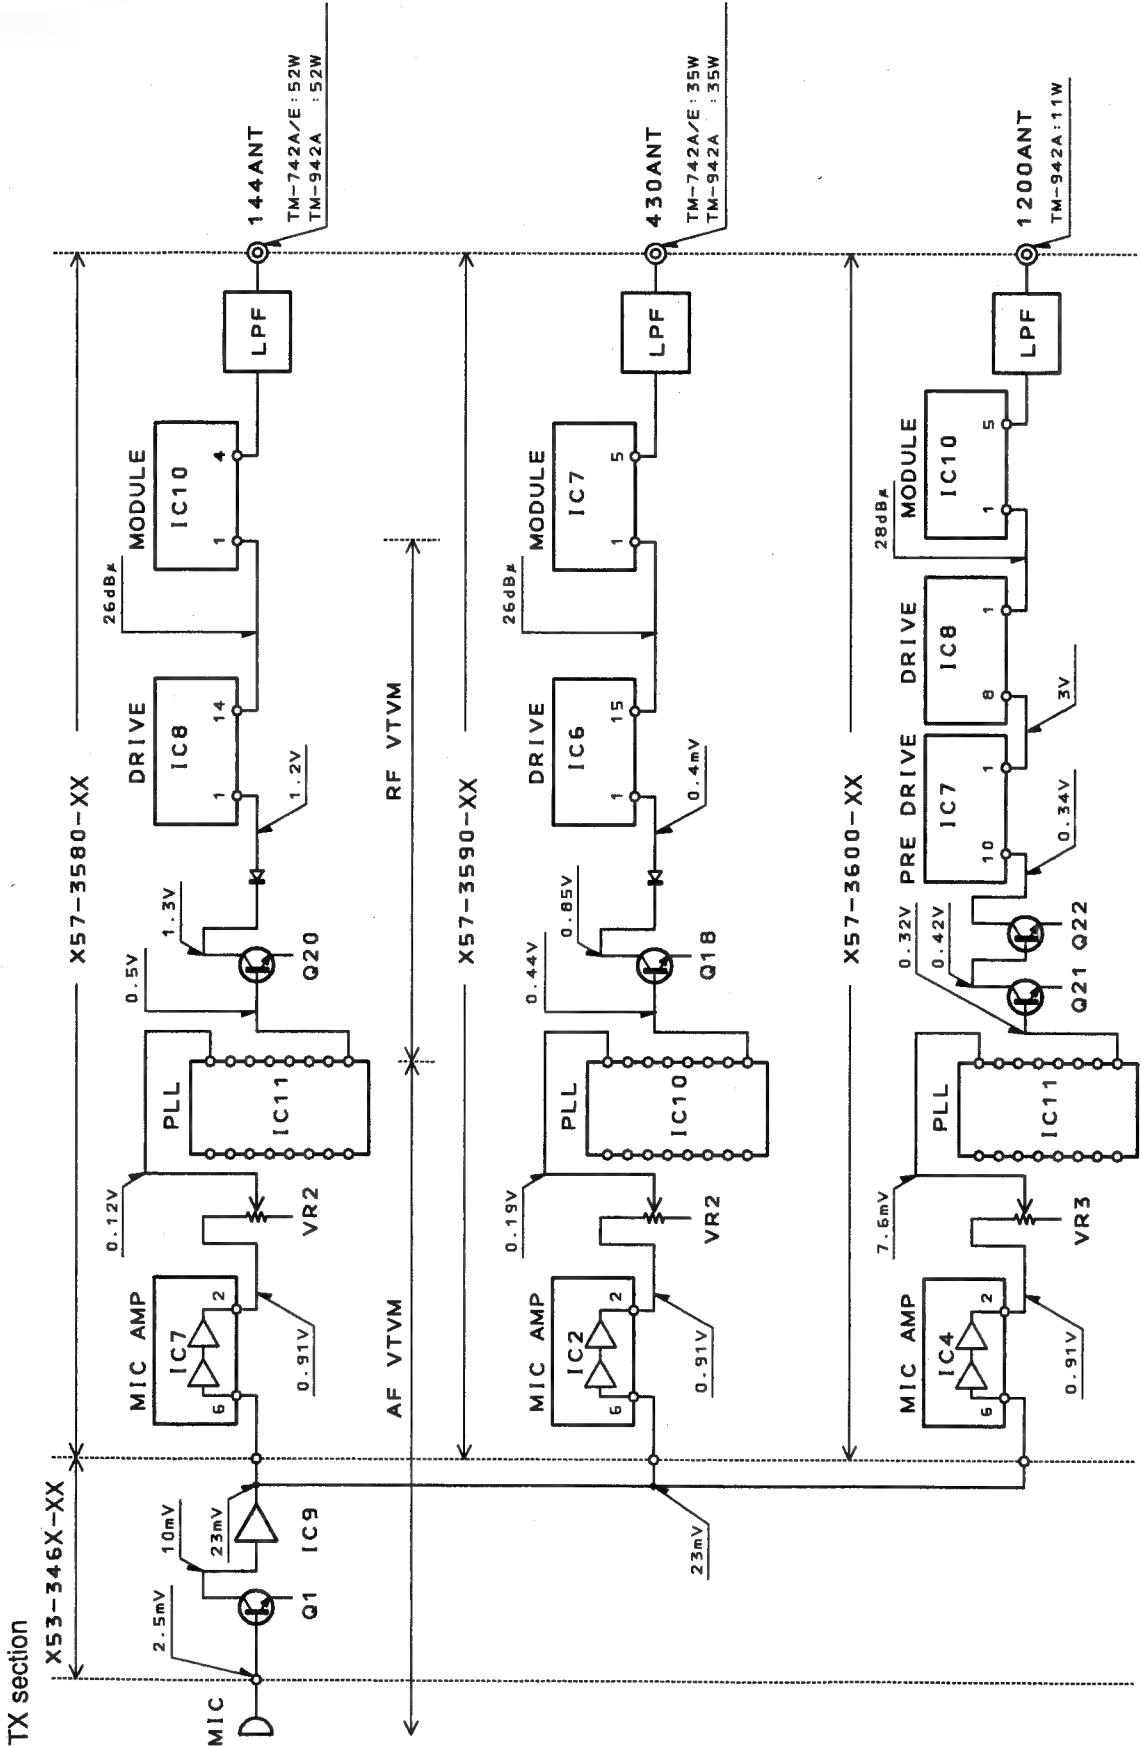


1. AG is set so that MIC input becomes 3kHz DEV at 1kHz MOD.  
2. Transmitting frequency; 145.0MHz, 435.0MHz, 1280MHz, 28.0MHz, 50.0MHz, 220.0MHz.  
3. HI/MID/LOW SW: HI  
4. APC SW: OFF

# TM-742 A/742 E/942 A

## TSU-7(CTSS UNIT)

### TSU-7 PC BOARD VIEW

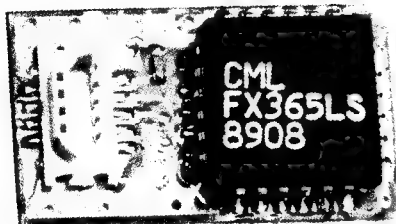


### TSU-7 PARTS LIST

Ref. No	Address	Rart	Rarts No.	Description	Desti- nation	Re- marks
TSU-7 (X52-3170-00)						
X1			G10-0692-04	CUTTON		
IC1			H21-0704-04	CUTTON		
D1			L78-0062-05	STAL (1MHz)		
CN1			FX365LS	IC		
VR1			DAN202U	DIODE		
R1			E40-5341-05			
R2			R12-6526-05	TRIM. POT. (47K)		
R4			RK73BG1J274J	CHIP R J 270K		
R5			RK73BG1J824J	CHIP R J 820K		
R6			RK73BF1J103J	CHIP R J 10K		
C1			RK73BG1J105J	CHIP R J 1M		
C2			RK73BG1J473J	CHIP R J 47K		
C4-6			CK73GB1H471K	CHIP C K 470pF		
C7			C92-0521-05	CHIP TAN 20WV		
C8.9			CK73FB1E104K	CHIP C K 0.1UF		
			CK73GB1H471K	CHIP C K 470pF		
			CC73GCH1H221J	CHIP C J 220pF		


## TSU-7(CTCSS UNIT)

## PC BOARD VIEWS

**(Component side view)**

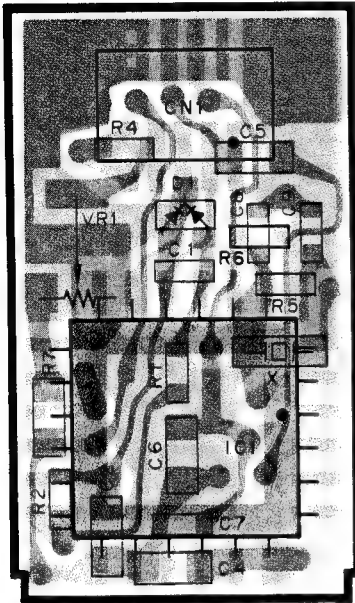


**(Foil side view)**

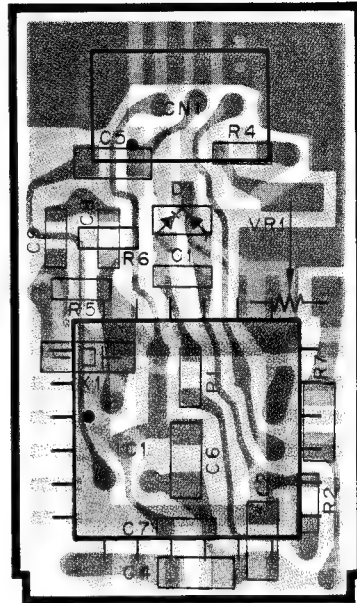

 : Component side pattern

 : Foil side pattern

### CIRCUIT DIAGRAM

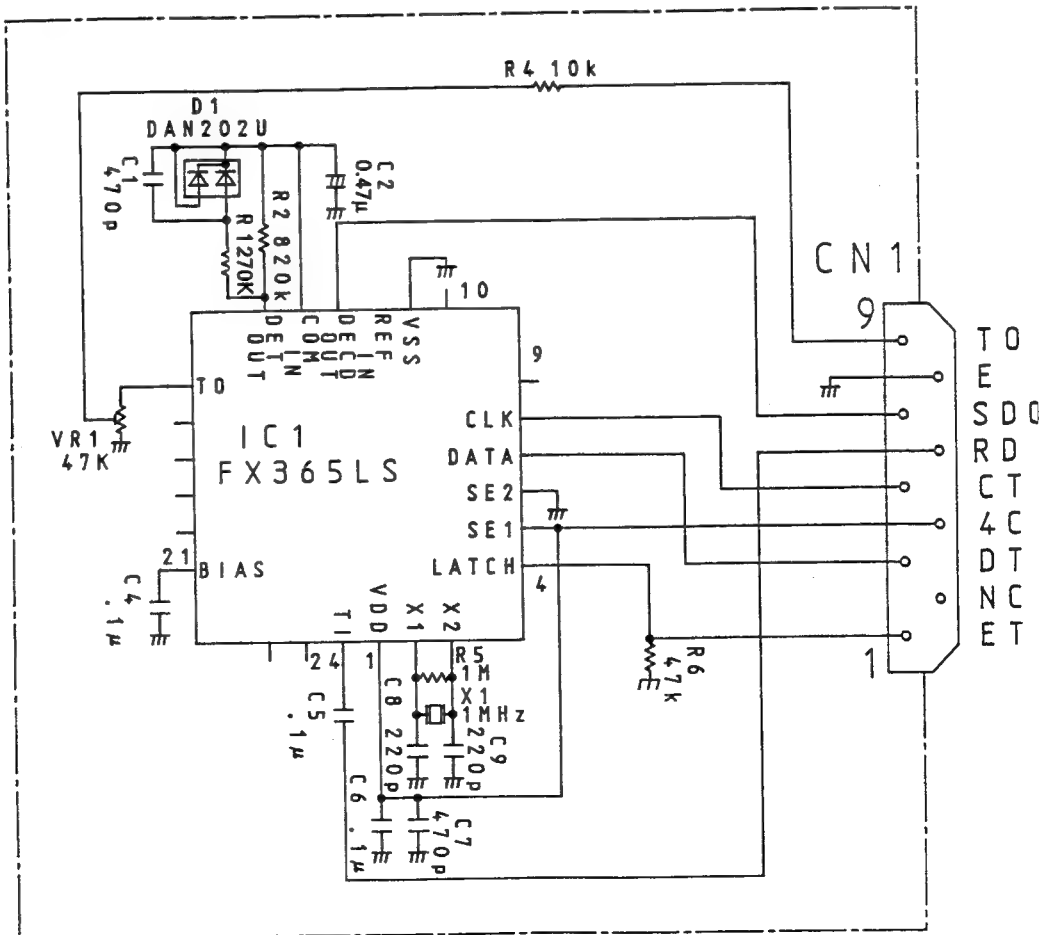

# TM-742 A/742 E/942 A

## MC-45 (MULTI FUNCTION MICROPHONE)


### EXTERNAL VIEW



### PARTS LIST

Ref. No.	Address	New Parts	Parts No.	Description	Destination	Remarks
			A02-0896-08	CASE (FRONT)		
			A02-0900-08	CASE (REAR)		
			E30-3006-08	CURL CORD ASSY		
			G13-0933-08	CUSHION (UP,DWN)		
			K29-3165-08	KNOB PTT		
			K29-3168-08	KNOB UP		
			K29-3169-08	KNOB DWN		
			K29-3170-08	KNOB CALL,VFO, MR,PF		
S3-6			S59-1409-28	SWITCH ASSY UP,DWN		
S7,8			S40-1431-08	TACT SWITCH CALL,VFO, MR,PF		
SW1			S40-1437-08	TACT SWITCH UP,DWN		
SW2			S50-1431-08	MICRO SWITCH LOCK		
			S31-1422-08	SLIDE SWITCH LOCK		
			T91-0383-08	MICROPHONE ELEMENT		

### SCHEMATIC DIAGRAM

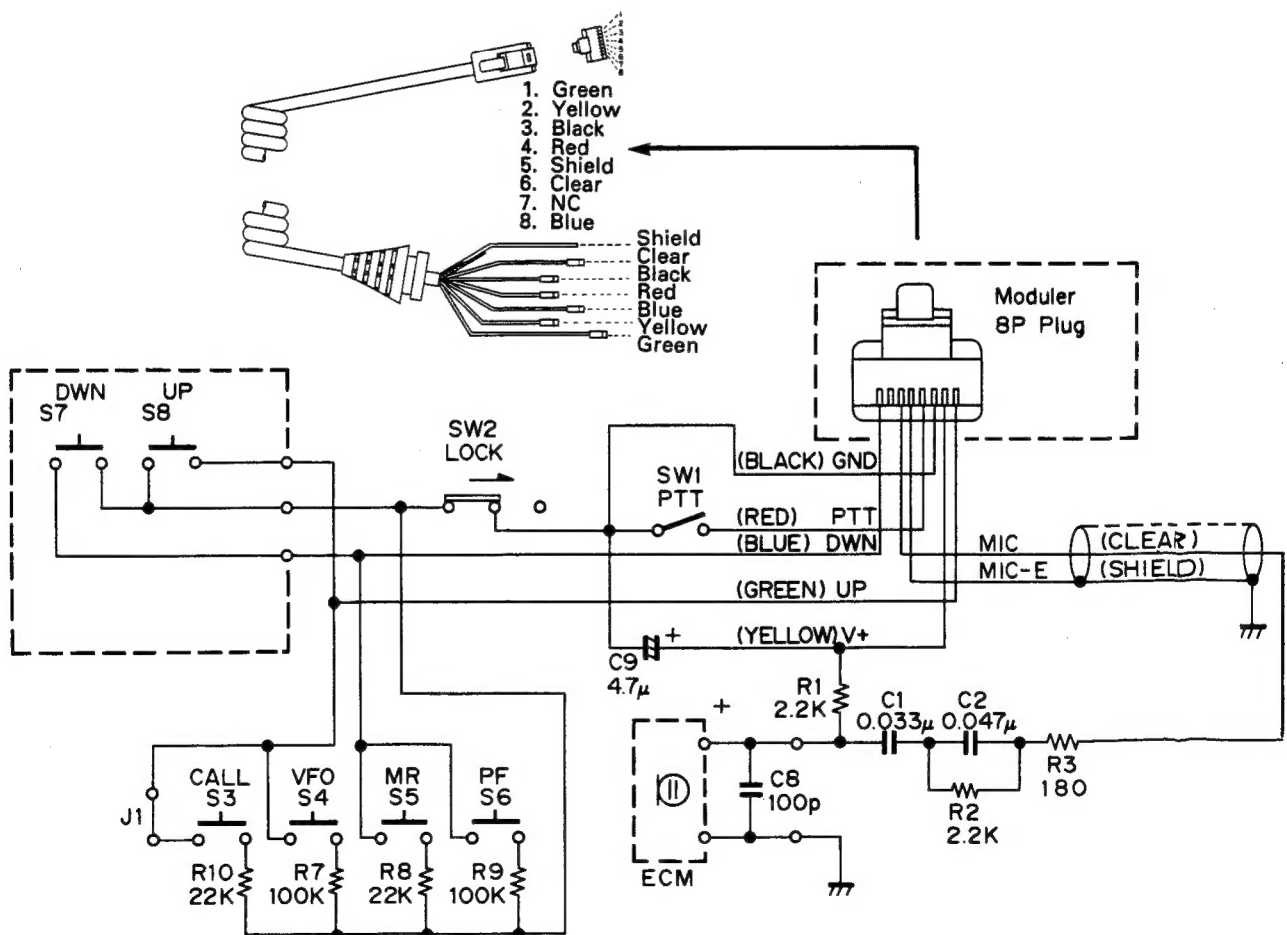

# TM-742 A/742 E/942 A

## MC-45DM (MULTI FUNCTION MICROPHONE WITH AUTOPATCH)


### EXTERNAL VIEW



### PARTS LIST

Ref. No.	Address	New Parts	Parts No.	Description	Destination	Remarks
			A02-0898-08	CASE (FRONT)		
			A02-0901-08	CASE (REAR)		
			E30-3006-08	CURL CORD ASSY		
			G13-0933-08	CUSHION (UP,DWN)		
			K29-3165-08	KNOB PTT		
			K29-3167-08	KEY TOP DTMF		
			K29-3168-18	KNOB UP		
			K29-3169-18	KNOB DOWN		
S7, 8			S59-1409-28	SWITCH ASSY UP,DWN		
SW1			S40-1437-08	TACT SWITCH UP,DWN		
SW2			S50-1431-08	MICRO SWITCH PTT		
			S31-1422-08	SLIDE SWITCH LOCK		
			T91-0393-08	MICROPHONE ELEMENT		

### SCHEMATIC DIAGRAM

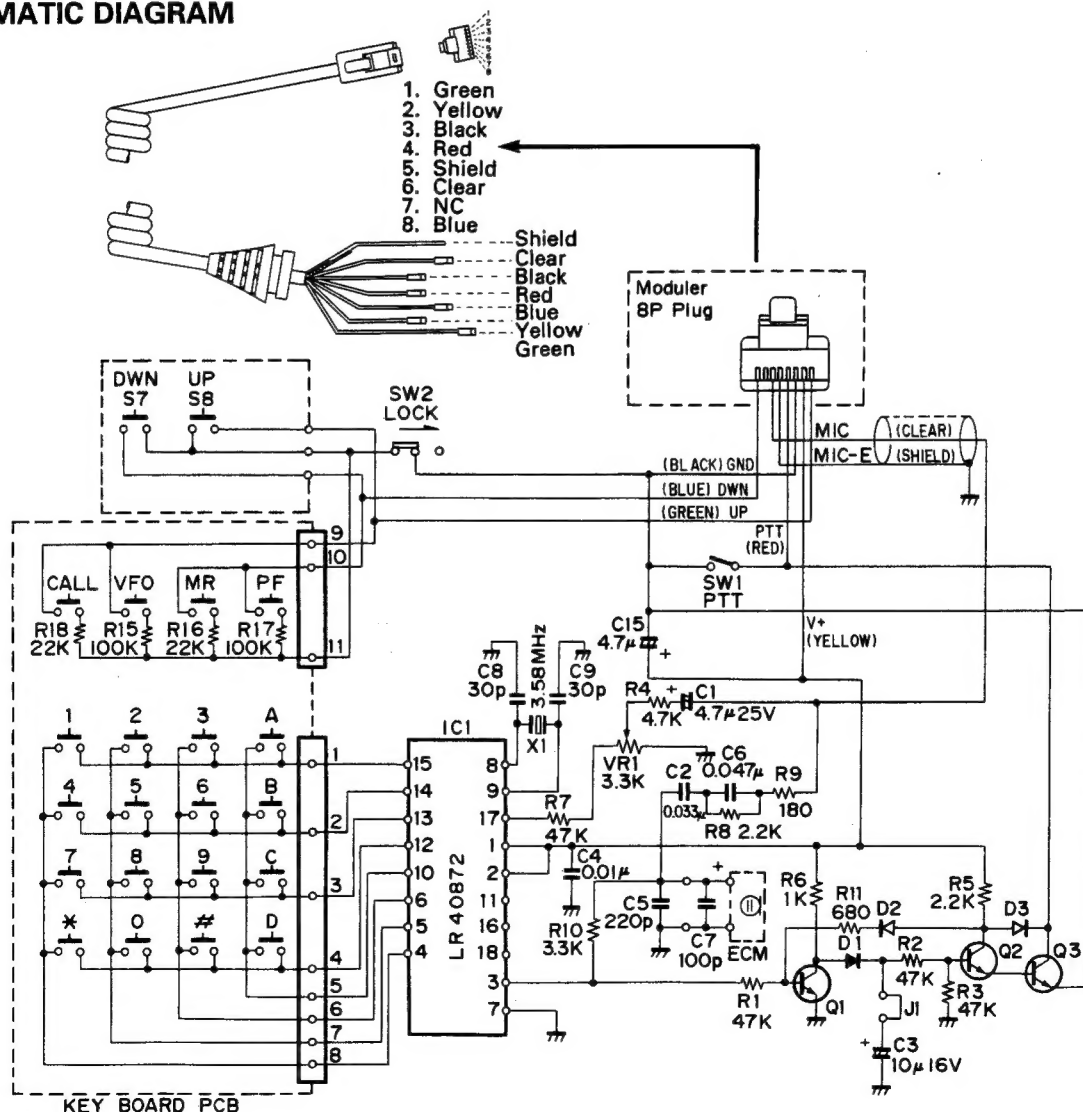

# TM-742 A/742 E/942 A

## UT-28S/50S/UT-220S/1200 SPECIFICATION

			UT-28S	UT-50S	UT-220S	UT-1200
GENERAL	Frequency range (MHz)		28 ~ 29.7	50 ~ 54	220 ~ 225	1240 ~ 1300
	Mode		F3(FM)			
	Antenna impedance		50Ω			
	Operating temperature		-20°C ~ +60°C			
	Power requirements		DC13.8V ±15% (11.7 ~ 15.8V)			
	Ground		Negative			
	Frequency stability		Less than ±10ppm			Less than ±3ppm
	Current drain	Transmit mode	Less than 11.5A		Less than 7.0A	Less than 6.5A
TRANSMITTER		Receiver mode	Less than 1.2A			
	Output Power	HI	50W		25W	10W
		MID	10W			-
		LOW	Approx 5W			1W
	Modulation		Reactance modulation			
	Spurious radiation		Less than -60dB (※)			Less than -50dB
	Maximum frequency deviation		±5kHz			
	Audio distortion (at 60% modulation)		Less than 3%			
RECEIVER	Microphone impedance		600Ω			
	Circuitry		Double conversion superheterodyne			
	Intermediate frequency 1st/2nd		8.83MHz	10.595MHz	30.825MHz/455kHz	59.7MHz
			455kHz			
	Sensitivity (12 dB SINAD)		Less than 0.16μV(-16dBμ)			
	Selectivity -6 dB		More than 10kHz	More than 12kHz		
	Selectivity -60 dB		Less than 24kHz			Less than 36kHz
	Squelch sensitivity		Less than 0.1μV(-20dBμ)			
	Output (5% distortion)		More than 2W(8Ω load)			
	External speaker impedance		8Ω			

Notes: 1. Circuit and ratings are subject to change without notice, due to advancements in technology.  
2. Recommended duty cycle: 1 minute Transmit, 3 minutes Reception.

(※) Hi Power position: Less than -70dB

# TM-742 A/742 E/942 A

## SPECIFICATIONS

			144 MHz Band	430/440 MHz Band	1200 MHz Band
GENERAL	Frequency range (MHz)		144 ~ 148	430 ~ 440/438 ~ 450	1240 ~ 1300
	Mode		F3E(FM)		
	Antenna impedance		50 $\Omega$		
	Operating temperature		-20 °C ~ +60 °C (-4 °F ~ +140 °F)		
	Power requirements		13.8 VDC $\pm$ 15 % (11.7 ~ 15.8 V)		
	Ground		Negative		
	Current drain	Transmit mode	Less than 11.5 A	Less than 10.0 A	Less than 6.5 A
		Receiver mode	Less than 1.2 A	Less than 1.2 A	Less than 1.2 A
	Frequency stability		$\pm$ 10 ppm		
	Dimensions (W x H x D)		150 x 50 x 175 mm		
	Weight		TM-742A/742E: 1.5 kg TM-942A: 1.8 kg		
TRANSMITTER	Output power	HI	50 W	35 W	10 W
		MID	10 W	10 W	—
		LOW	Approx. 5 W	Approx. 5 W	1 W
	Modulation		Reactance modulation		
	Spurious radiation		Less than -60 dB		Less than -50 dB
	Maximum frequency deviation		$\pm$ 5 kHz		
	Audio distortion (at 60% modulation)		Less than 3%		
RECEIVER	Microphone impedance		600 $\Omega$		
	Circuitry		Double conversion superheterodyne		
	Intermediate frequency	1st	10.7 MHz	21.6 MHz	59.7 MHz
		2nd	455 kHz		
	Sensitivity (12 dB SINAD)		Less than 0.16 $\mu$ V (-10 dB $\mu$ ) *		
	Selectivity -6 dB		More than 12 kHz		
	Selectivity -60 dB		Less than 24 kHz		Less than 36 kHz
	Squelch sensitivity		Less than 0.1 $\mu$ V (-14 dB $\mu$ )		
	Output (5% distortion)		More than 2 W (8 $\Omega$ load)		
	External speaker impedance		8 $\Omega$		

\* 1240 MHz to 1260 MHz Less than 0.22  $\mu$ V (-7 dB $\mu$ )

### Notes:

1. Circuit and ratings are subject to change without notice due to advancements in technology.
2. Recommended duty cycle: 1 minute Transmit, 3 minutes Reception.

## KENWOOD CORPORATION

Shionogi Shibuya Building, 17-5, 2-chome Shibuya, Shibuya-ku, Tokyo 150, Japan

KENWOOD U.S.A. CORPORATION

COMMUNICATIONS & TEST EQUIPMENT GROUP

P.O. BOX 22745, 2201 East Dominguez St., Long Beach, CA 90801-5745, U.S.A.

KENWOOD ELECTRONICS DEUTSCHLAND GMBH

Rembrücker Str. 15, 6056 Heusenstamm, Germany

TRIO-KENWOOD U.K. LIMITED

KENWOOD House, Dwight Road, Watford, Herts., WD1 8EB United Kingdom

KENWOOD ELECTRONICS BENELUX N.V.

Mechelsesteenweg 418 B-1930 Zaventem, Belgium

TRIO-KENWOOD FRANCE S.A.

13, Boulevard Ney, 75018 Paris, France

KENWOOD LINEAR S.P.A.

20125, Milano-via Arbe, 50, Italy

KENWOOD ELECTRONICS AUSTRALIA PTY. LTD.

P.O. Box 504, 8 Figtree Drive, Australia Centre, Homebush, N.S.W. 2140, Australia

KENWOOD & LEE ELECTRONICS, LTD.

Wang Kee Building, 5th Floor, 34-37, Connaught Road, Central, Hong Kong

KENWOOD ELECTRONICS CANADA INC.

P.O. BOX 1075, 959 Gana Court, Mississauga, Ontario, Canada L5S 1N9